


1

2


3

4


A

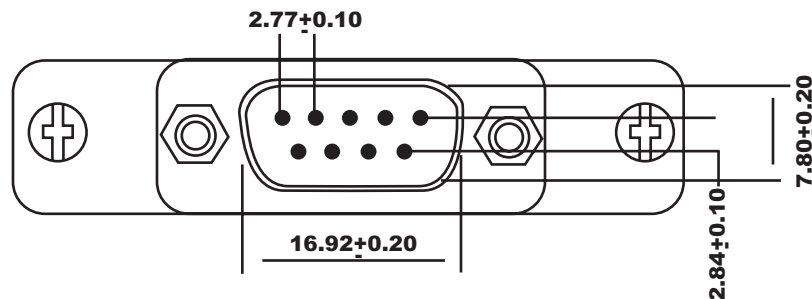

B

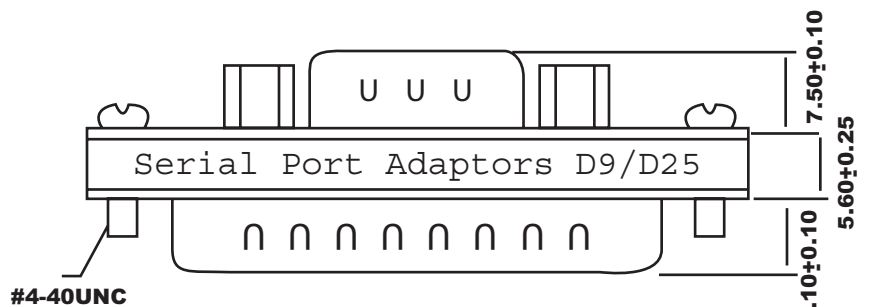

C

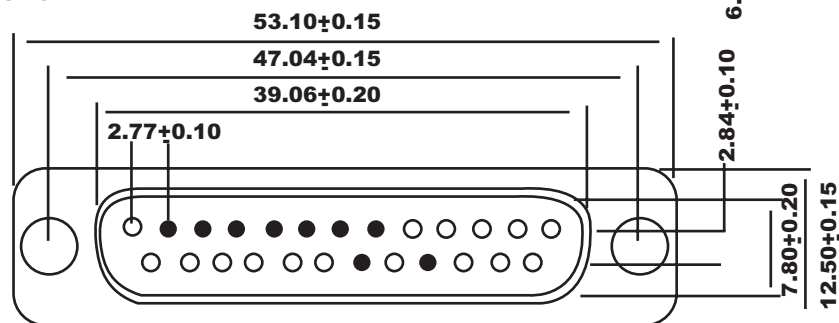

D

Description	
Name :	
AB467-R	

1

2

3

4

MA 001C (DB9M/25M Adaptor)

PIN OUT: 09Male 25Male

1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
G	G

1.Label: Orange color with White character

2.One Side: Serial Port Adaptors D9/D25

3.The Other Side: MINI Adaptor

Specification:

1.Insulator: PBT Glass Fiber reinforced UL 94VO

2.Contact:Brass

3.Contact Plating: Gold plated over Nickel

4.Shell: Tin Plated Shell

5.Current Rating: 3 AMP

6.Dielectric Strength: 500V AC for one minute

7.Insulator Resistance: 500M min at 500V DC

8.Temperature:-25°C ----+105°C

A

B

C

D



THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.