


1

2

3

4

2.77±0.05

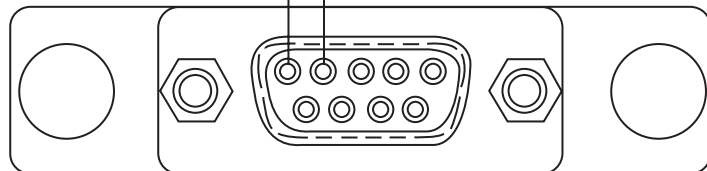

MA 001D (DB9F/25F Adaptor)

PIN Out: 09Female

25Female

1 — 8

2 — 3

3 — 2

4 — 20

5 — 7

6 — 6

7 — 4

8 — 5

9 — 22


G — G

A

A


B

B

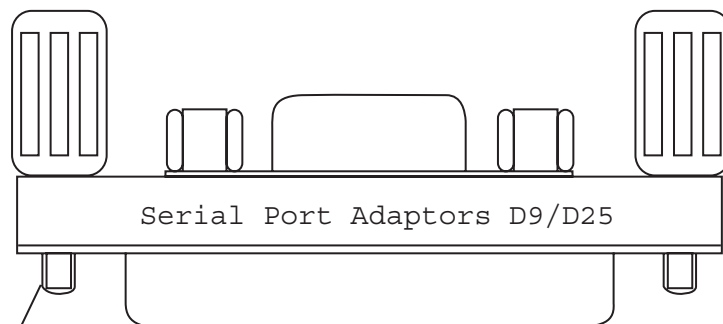

UNC #4-40

2.77±0.05

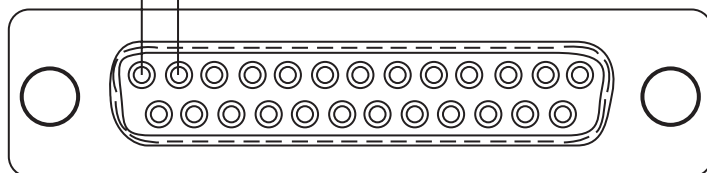

1.Label: Orange Color with White Character

2.One Side: Serial Port Adaptors D9/D25

3.The Other Side: MINI Adapter

Specification:

1.Insulator: PBT glass fiber reinforced UL 94VO

2.Contact: Brass

3.Contact Plating: Gold Plated over Nickel

4.Shell: Tin Plated Shell

5.Current Rating: 3 AMP

6.Dielectric Strength: 500V AC for one minute

7.Insulator Resistance: 500M min at 500 V DC

8.Temperature:-25°C +105°C

C

C

Description

Name :

AB469-R

D

D

ASSMANN
Electronic Components

RoHS
Compliant

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1

2

3

4