

### Features

- Bipolar Hall Effect Latch Sensor
- 3.5V to 20V DC Operation Voltage
- Open Collector Pre-Driver
- 25mA Output Sink Current
- Chip Power Reverse-Connection Protection
- Operating Temperature: -40°C~+150°C
- Lead Free Packages: SIP-3L and SC59-3L (Commonly known as SOT23 in Asia) (Note 1)
- SC59-3L: Available in "Green" Molding Compound (No Br, Sb)
- Lead Free Finish/RoHS Compliant (Note 2)

### General Description


AH175 is a single-digital-output Hall-effect sensor for high temperature operation. The device includes an on-chip Hall voltage generator for magnetic sensing, an amplifier to amplify Hall voltage, and a comparator to provide switching hysteresis for noise rejection, and an open-collector output pre-driver. An internal band-gap regulator is used to provide temperature compensated supply voltage for internal circuits and allows a wide operating supply range.

While the magnetic flux density (B) is larger than threshold Bop, the OUT pin turns on (low). If B removed toward Brp, the OUT pin is latched "on" state prior to B < Brp. When B < Brp, the OUT pin goes into "off" state.

### Applications

- Rotor Position Sensing
- Current Switch
- Encoder
- RPM Detection

### Ordering Information

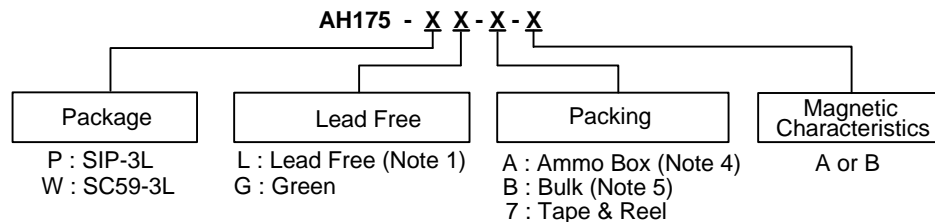


Device	Package Code	Packaging (Note 3)	Tube/Bulk		7" Tape and Reel		Ammo Box		Magnetic Characteristics
			Quantity	Part Number Suffix	Quantity	Part Number Suffix	Quantity	Part Number Suffix	
AH175-PL-A-A	P	SIP-3L	NA	NA	NA	NA	4000/Box	-A	A
AH175-PL-A-B	P	SIP-3L	NA	NA	NA	NA	4000/Box	-A	B
AH175-PL-B-A	P	SIP-3L	1000	-B	NA	NA	NA	NA	A
AH175-PL-B-B	P	SIP-3L	1000	-B	NA	NA	NA	NA	B
AH175-WL-7-A	W	SC59-3L	NA	NA	3000/Tape & Reel	-7	NA	NA	A
AH175-WL-7-B	W	SC59-3L	NA	NA	3000/Tape & Reel	-7	NA	NA	B
AH175-WG-7-A	W	SC59-3L	NA	NA	3000/Tape & Reel	-7	NA	NA	A
AH175-WG-7-B	W	SC59-3L	NA	NA	3000/Tape & Reel	-7	NA	NA	B

- Notes:
1. SIP-3L is available in "Lead Free" product only.
  2. EU Directive 2002/95/EC (RoHS). All applicable RoHS exemptions applied, see *EU Directive 2002/95/EC Annex Notes*.
  3. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
  4. Ammo Box is for SIP-3L Spread Lead.
  5. Bulk is for SIP-3L Straight Lead.

## Pin Assignment


(1) SIP-3L

(Top view)

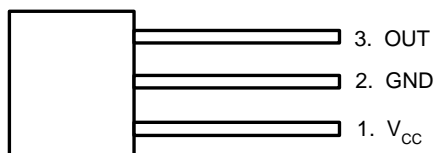

(2) SC59-3L (Commonly known as SOT23 in Asia)


(Top view)

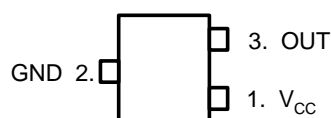

## Pin Description

Name	Pin #	Description
$V_{CC}$	1	Input Power
GND	2	Ground
OUT	3	Output Stage

## Block Diagram

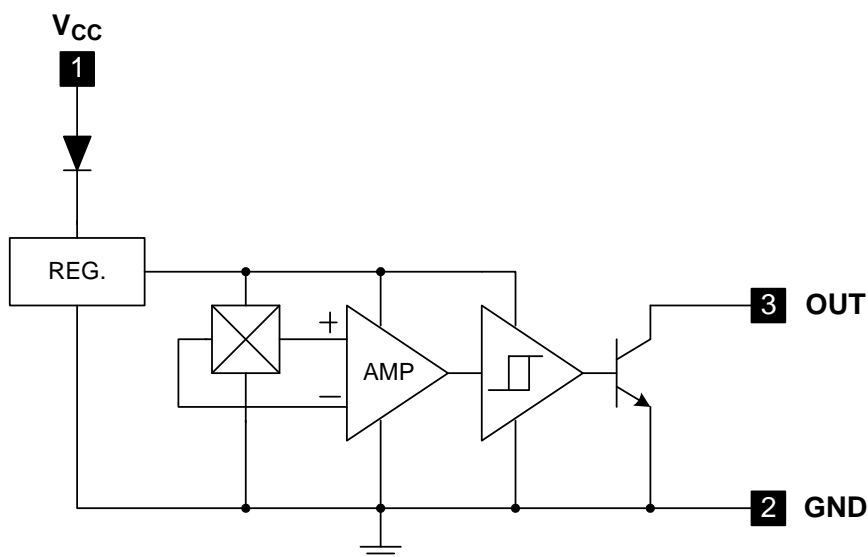

### Absolute Maximum Ratings (T<sub>A</sub> = 25°C)

Symbol	Parameter		Rating	Unit
V <sub>CC</sub>	Supply Voltage		20	V
V <sub>out</sub> (off)	Output “OFF ” Voltage		20	V
I <sub>o</sub> (sink)	Output “ON” Current		25	mA
P <sub>D</sub>	Power Dissipation	SIP-3L	550	mW
		SC59-3L	230	mW
T <sub>J(MAX)</sub>	Maximum Junction Temperature		150	°C
T <sub>ST</sub>	Storage Temperature Range		-65~+150	°C

### Recommended Operating Conditions

Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>CC</sub>	Supply Voltage	Operating	3.5	20	V
T <sub>A</sub>	Operating Ambient Temperature (Note 6)	Operating	-40	150	°C

Note: 6. Shall not exceed P<sub>D</sub> and Safety Operation Area.

### Electrical Characteristics (T<sub>A</sub> = 25°C)

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
V <sub>out (SAT)</sub>	Output Saturation Voltage	V <sub>CC</sub> = 12V, OUT "ON" I <sub>o</sub> = 10mA	-	300	400	mV
I <sub>CC</sub>	Supply Current	V <sub>CC</sub> = 12V, OUT "OFF"	-	3.5	6	mA

### Magnetic Characteristics (T<sub>A</sub> = 25°C, V<sub>CC</sub> = 12V)

(1mT = 10 Gauss)


#### A grade

Symbol	Characteristics	Min	Typ.	Max	Unit
Bops(south pole to brand side)	Operation Point	15	-	60	Gauss
Brps(south pole to brand side)	Release Point	-60	-	-15	Gauss
Bhy( Bopx – Brpx  )	Hysteresis	30	80	120	Gauss

#### B grade

Symbol	Characteristics	Min	Typ.	Max	Unit
Bops(south pole to brand side)	Operation Point	5	-	80	Gauss
Brps(south pole to brand side)	Release Point	-80	-	-5	Gauss
Bhy( Bopx – Brpx  )	Hysteresis	10	80	160	Gauss


## Operating Characteristics

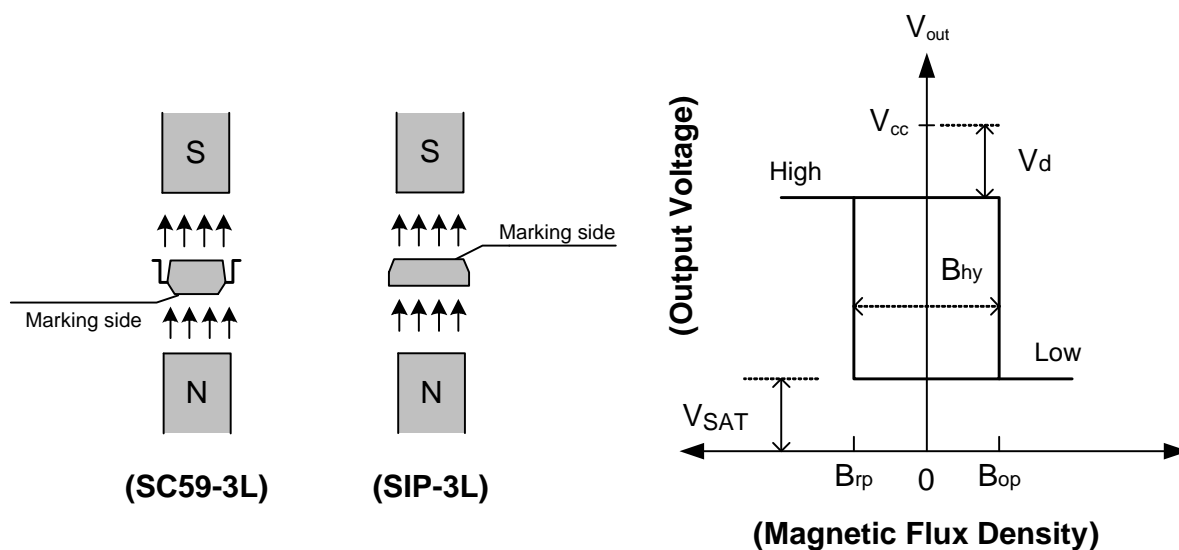

## Performance Characteristics


### (1) SIP-3L

$T_A$ (°C)	25	50	60	70	80	85	90	95	100
$P_D$ (mW)	550	440	396	352	308	286	264	242	220
$T_A$ (°C)	105	110	115	120	125	130	135	140	150
$P_D$ (mW)	198	176	154	132	110	88	66	44	0

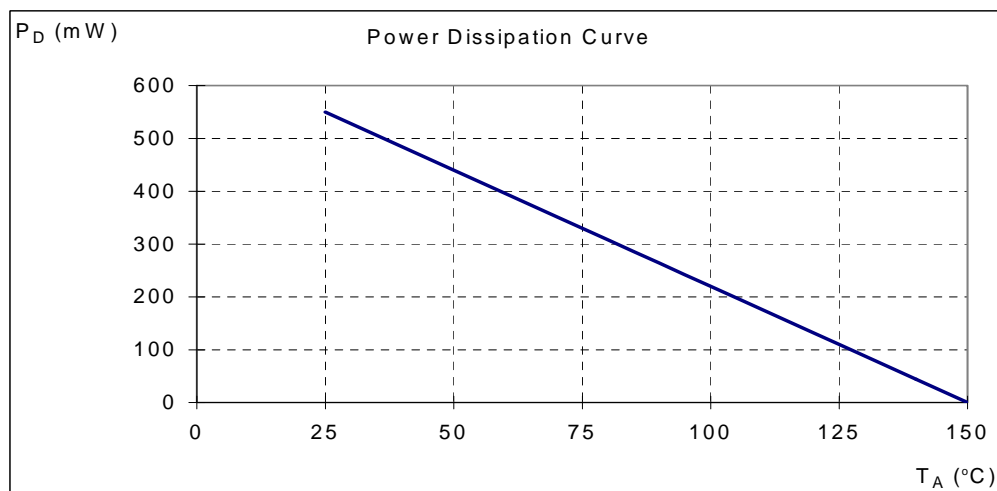


**Performance Characteristics (Continued)**
**(2) SC59-3L (Commonly known as SOT23 in Asia)**

T <sub>A</sub> (°C)	25	50	60	70	80	90	100	110	120	125	130	140	150
P <sub>D</sub> (mW)	230	184	166	147	129	110	92	74	55	46	37	18	0

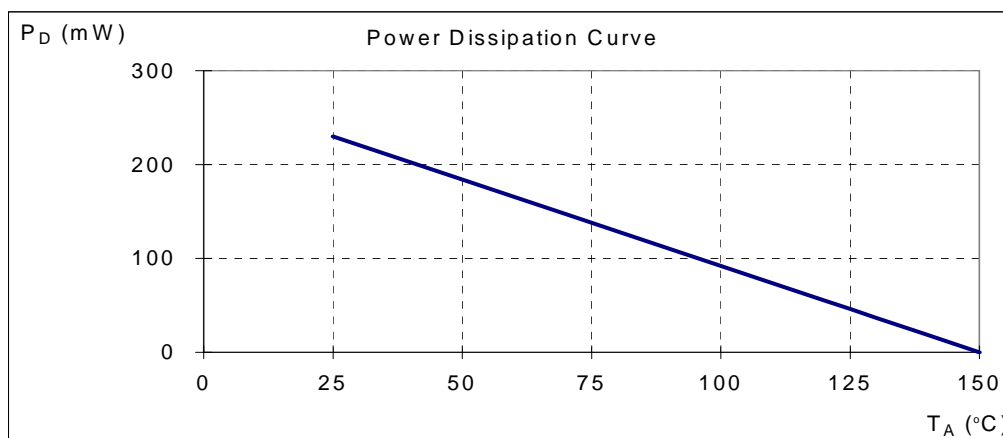
**Marking Information**
**(1) SIP-3L**


( Top View )



Y : Year : "7" = 2007  
           "8" = 2008  
 WW : Nth Week 01~52  
 X : Internal code  
      a~z : Lead Free

**(2) SC59-3L (Commonly known as SOT23 in Asia)**

( Top View )




XX : J5 : AH175  
 Y : Year 0~9  
 M : Month A~L  
 X : Internal code  
      A~Z : Green  
      a~z : Lead Free


Part Number	Package	Identification Code
AH175	SC59-3L	J5

**Package Information** (All Dimensions in mm)

(1) Package Type: SIP-3L for Bulk pack

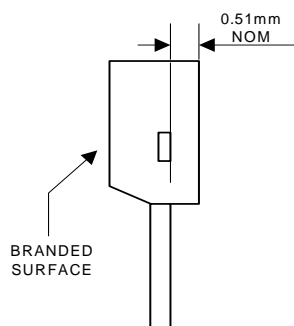


Active Area Depth

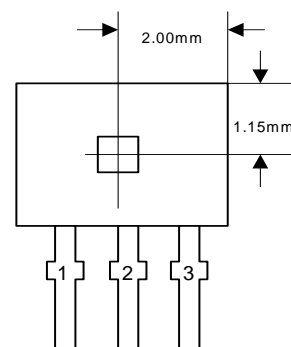


Sensor Location

**Package Dimension**

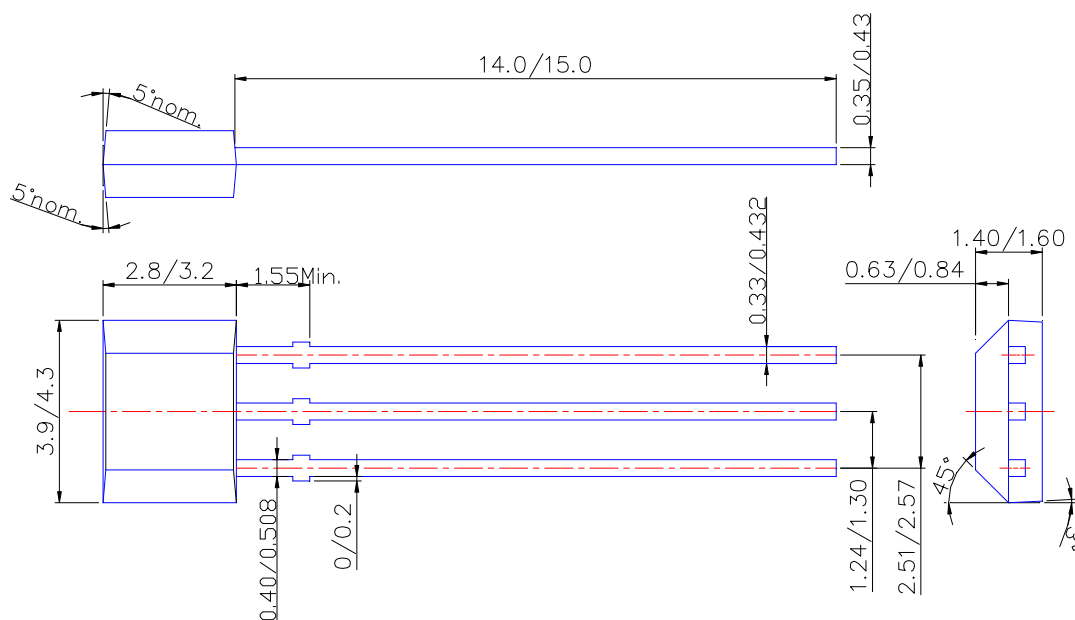


### Package Information (Continued)

**(2) Package Type: SIP-3L for Ammo pack**

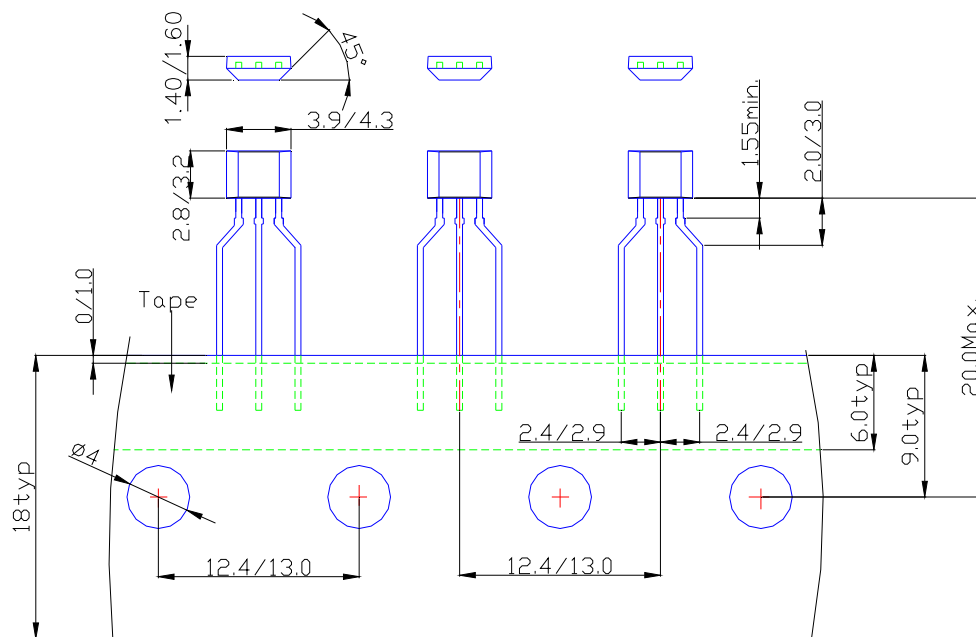

**(3) Package Type: SC59-3L (Commonly known as SOT23 in Asia)**

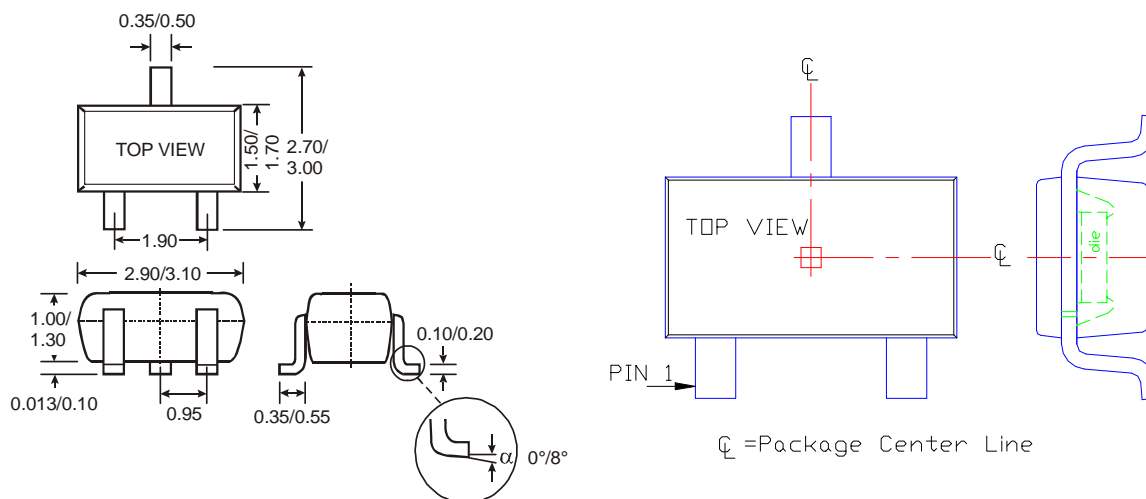

**IMPORTANT NOTICE**

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

**LIFE SUPPORT**

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.