


SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	48	Vdc
OPERATING VOLTAGE RANGE	9 ~ 48	Vdc
RATED CURRENT (MAX)	15	mA
MINIMUM SPL @ 10 CM	88	dBA
RESONANT FREQUENCY	2900±250	Hz
TONE OR PULSE RATE	CONTINUOUS	0 PULSE PER SECOND
OPERATING TEMPERATURE	-20 ~ +65	°C
STORAGE TEMPERATURE	-40 ~ +85	°C
HOUSING MATERIAL	PBT	—
TERMINAL MATERIAL	LEAD WIRE	—
WEIGHT	28.2	grams

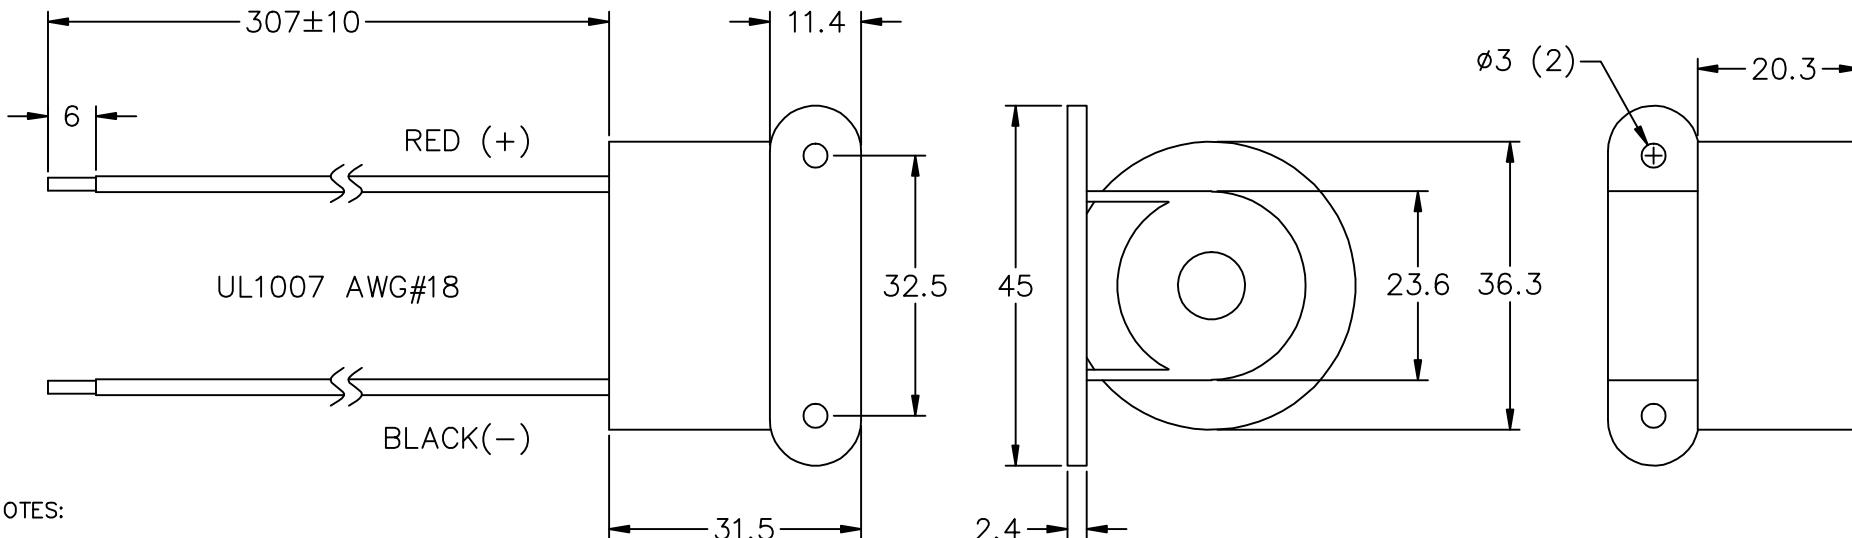

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR
WITHDRAWAL WITHOUT NOTICE.
3. SURGE VOLTAGE= 20% OVER RATED VOLTAGE
FOR LESS THAN 5 MINUTES.
4. REVERSE VOLTAGE PROTECTED TO 48Vdc.
5. BENDER MATERIAL: STAINLESS STEEL
6. THIS PART IS RoHS 2002/95/EC COMPLIANT.

FILE NAME
AI-3629-SF-LW307-R.DWG

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	1/17/07	
A	REVISED SPL	1/17/08	B.R.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS. TOLERANCES ARE ± 0.5 AND
ANGLES ARE $\pm 3^\circ$.

APPROVALS DATE

DRAWN J.D. 1/07

CHECKED D.F. 1/07

APPROVED R.W. 1/07

DO NOT SCALE DRAWING

projects [®]
unlimited

Dayton, Ohio

INDICATOR

SIZE A DRAWING NO.
AI-3629-SF-LW307-R

SCALE: N.T.S. SHEET 1 OF 1