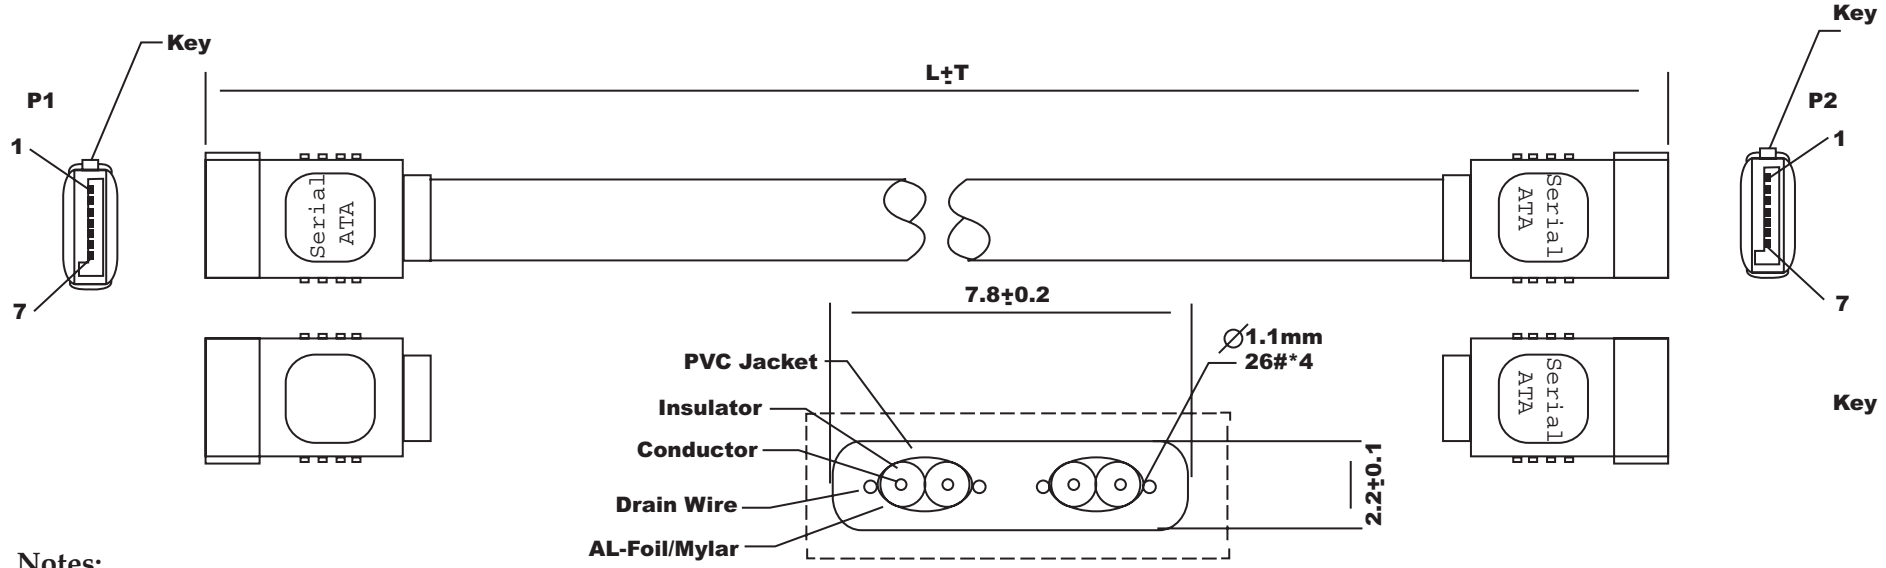

Notes:

1.Cable: UL2725 80°C 30V[26AWG(1/0.404)*2F
+AL/MY+Drain Wire(1/0.32*2]TIN INS: Foam-PE OD:⌀1.1±0.05mm PVC
Jacket OD:⌀(2.2±0.1)*(7.8±0.2)mm Color:Red(Pantone 200C) Print: 2725
E209329 AWM 80°C 30V VW-1 Serial ATA 26AWG Lian Feng(Black Word)
Impedance: 100±5 OHM(Supplier: Lian Feng)

2.Connector: 2-1 Material: Housing: High Temperature Polyester & Glass Fiber UL 94V-0
Terminal: Copper Alloy
2-1 Plating: Contact Area: 15u" Gold Plated

3.Hood: Molded Type, PVC 45P, Color:Black(NK-K01)

4.Cable Ass'y Electrical Test: 4-1: 100% Open Short & MIS Wire Test
4-2: Contact Resistance 20M OHM Min
4-3: Insulation Resistance 20M OHM Min

5.Packing: See P-0039 Rev. C Packing Drawing
(Binding Size must be smaller than Blister

PIN Assignment 1:1

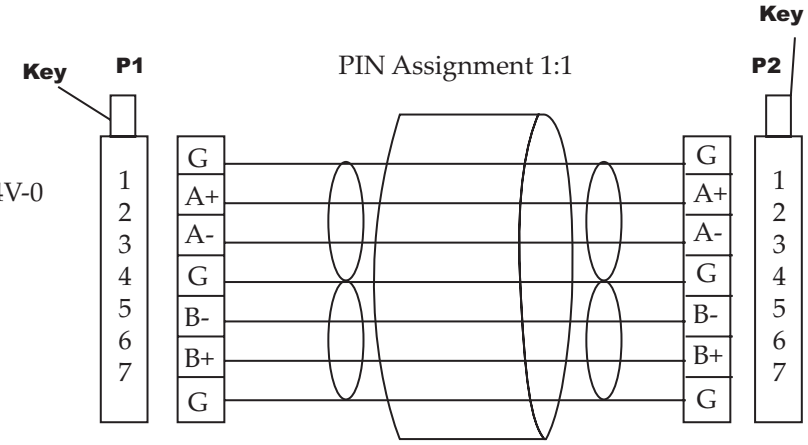

Description

Name: AK-SATA-050
Serial ATA Signal Cable

DWG	P/N	L(mm)	T(mm)	EAN Code	Blister
140-0497-4	AK-SATA-030	300	10	4016032152712	DB VP2
140-0497-3	AK-SATA-075	750	20	4016032121695	DB VP2
140-0497-2	AK-SATA-100	1000	20	4016032121138	DB VP2
140-0497-1	AK-SATA-50	500	10	4016032121121	DB VP2

ASSMANN Electronic Components

RoHS Compliant

THIS DRAWING IS UNPUBLISHED
© Copyright 2005 by Assmann Electronic Components All International Rights Reserved
This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.