

1

2

3

4

A

A

B


B

C

C

D

D

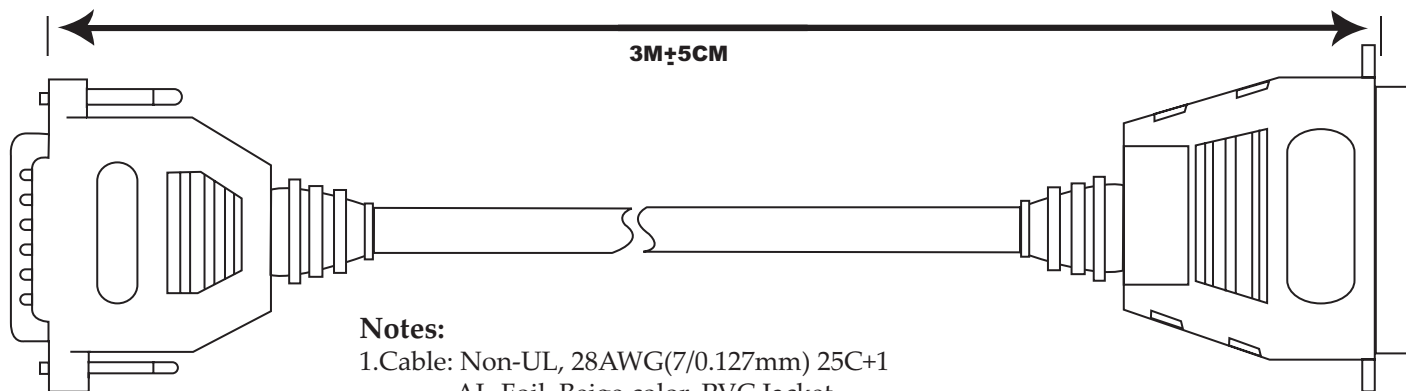

3M±5CM

Notes:

1.Cable: Non-UL, 28AWG(7/0.127mm) 25C+1

AL-Foil, Beige color. PVC Jacket

2.Lenth: 3M(General Error)

3.Connector: D-Sub Connection 25 male *1

Connector:Centronic 36 male *1

Contact: Gold Flash

4.Hood: Plastic Hood Ass'y with speedy-hood.

5.Electrical Test:

A. 100% Open short test

B. Insulation resistance:500K.

6.Conifguration:

D25P | 1 2 3 . . . 14 15 16 17 18 19 20 21 22 23 24 25 Shield |

-----|-----|

CN36P | 1 2 3 . . . 14 32 31 36 33 19 21 23 25 27 29 30 Shield |

RoHS
Compliant

Description

Name :

AK102-3-R

ASSMANN
Electronic Components

1

2

3

4

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.