

1

2

3

4

A

A

B

B

C

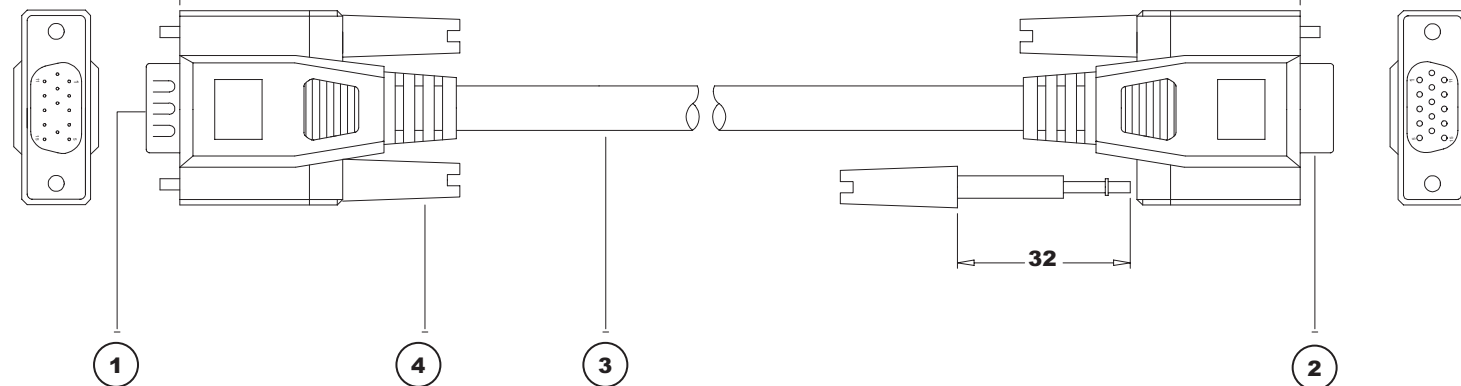
C

D

D

HD15 Male

HD15 Female

**Material:**

- 1.Cable: #28, UL2919, 3COAX+4C+1+AL/MY+B,O.D:8.1
- 2.Connector: HD15M, 9th Empty, Black
HD15F, Black
- 3.Thumbscrew:#4-40UNC, E32
- 4.Copper Tape:30X50
- 5.Black Heat Shrink Tube:∅1.5x15:6PCS ∅3x8:6PCS

Note:

- 1.Total Length:1800±50mm
- 2.Color: Beige
- 3.Molded Type
- 4.360° Solder

Configuration:

HD15M		HD15F
1	Red(Coax)	1
6	Red(Ground)	6
2	Green(Coax)	2
7	Green(Ground)	7
3	Blue(Coax)	3
8	Blue(Ground)	8
4	Brown	4
5	Black	5
13	Orange	13
14	White	14
Shield	(Braid)	Shield

Description

Name :

AK3220-1.8M-R

HD15 Male-HD15 Female

ASSMANN
Electronic Components

RoHS
Compliant

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1

2

3

4