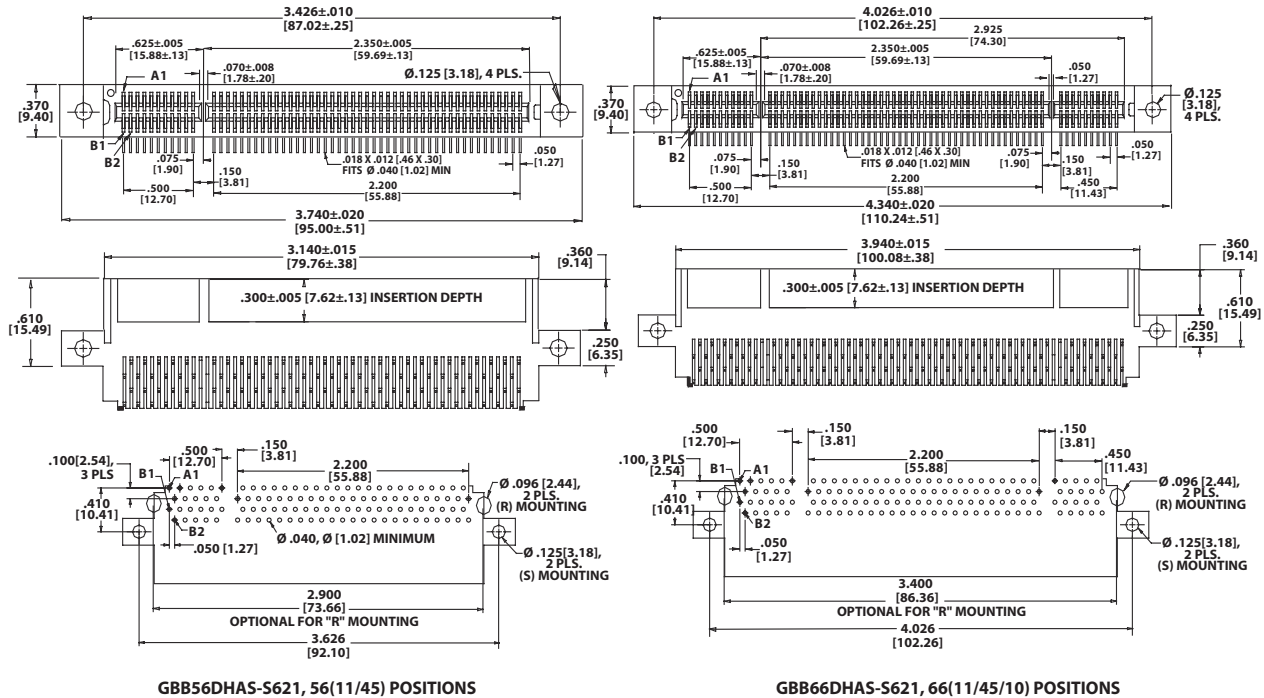
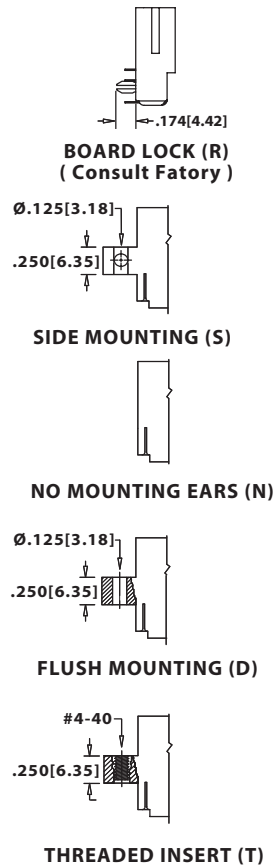


**.050" [1.27mm] Contact Centers, .915" Insulator Height
[MCA] Right Angle**


Industry Standard Part

DIMENSIONS

Dimensions in [] are in millimeters, all others are in inches.

**MOUNTING STYLE****DIMENSIONS**

Dimensions in [] are in millimeters, all others are in inches.

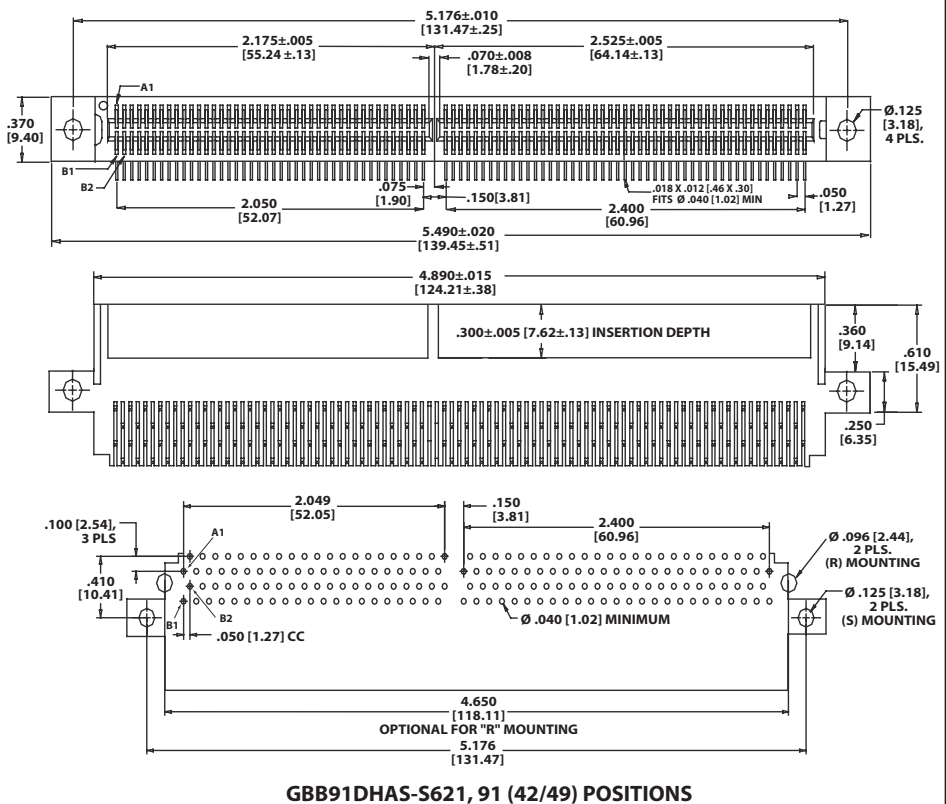



**.050" [1.27mm] Contact Centers, .915" Insulator Height
[MCA] Right Angle**

Industry Standard Part

PART NUMBER CODING

MATERIALS (Insulator/Contact)

G = PA9T/Phosphor Bronze
R = PPS/Phosphor Bronze
J = PA9T/Beryllium Copper
A = PPS/Beryllium Copper
(Consult Factory for Other Materials)

CONTACT FINISH - RoHS Compliant

All platings are Lead Free and have .000050" Nickel underplate

Contact Surface

B = .00010" Gold .000100" Pure Tin, Matte
C = .00030" Gold .000100" Pure Tin, Matte

CONTACT CENTERS

B = .050" [1.27mm]

G B B 56 D HA D - S621

MODIFICATION (CONSULT FACTORY)

-S621 = Card Slot Barriers Without Guide Posts

MOUNTING STYLE (Opposite Page)

S = Side Mounting
D = Flush Mounting
N = No Mounting
T = Flush Mounting With Threaded Insert
R = Metal Board Lock

TERMINATION TYPE

HA = .100" [2.54] Staggered Dip Solder, Right Angle
HB = .170" [4.32] Staggered Dip Solder, Right Angle


READOUT

D = Dual

NUMBER OF CONTACT POSITIONS

56 = 11/45
66 = 11/45/10
91 = 42/49
106 = 11/45/50

TERMINATION TYPE

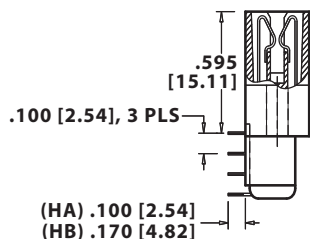


SPECIFICATIONS

- Accommodates .062" \pm .008" [1.57 \pm .20] PC board
- PPS or PA9T insulator
- Molded-in key available
- High reliability/high cycle hairpin bellows contact
- 1 amp current rating per contact
- 150 grams normal force minimum

DIMENSIONS

Dimensions in [] are in millimeters, all others are in inches.

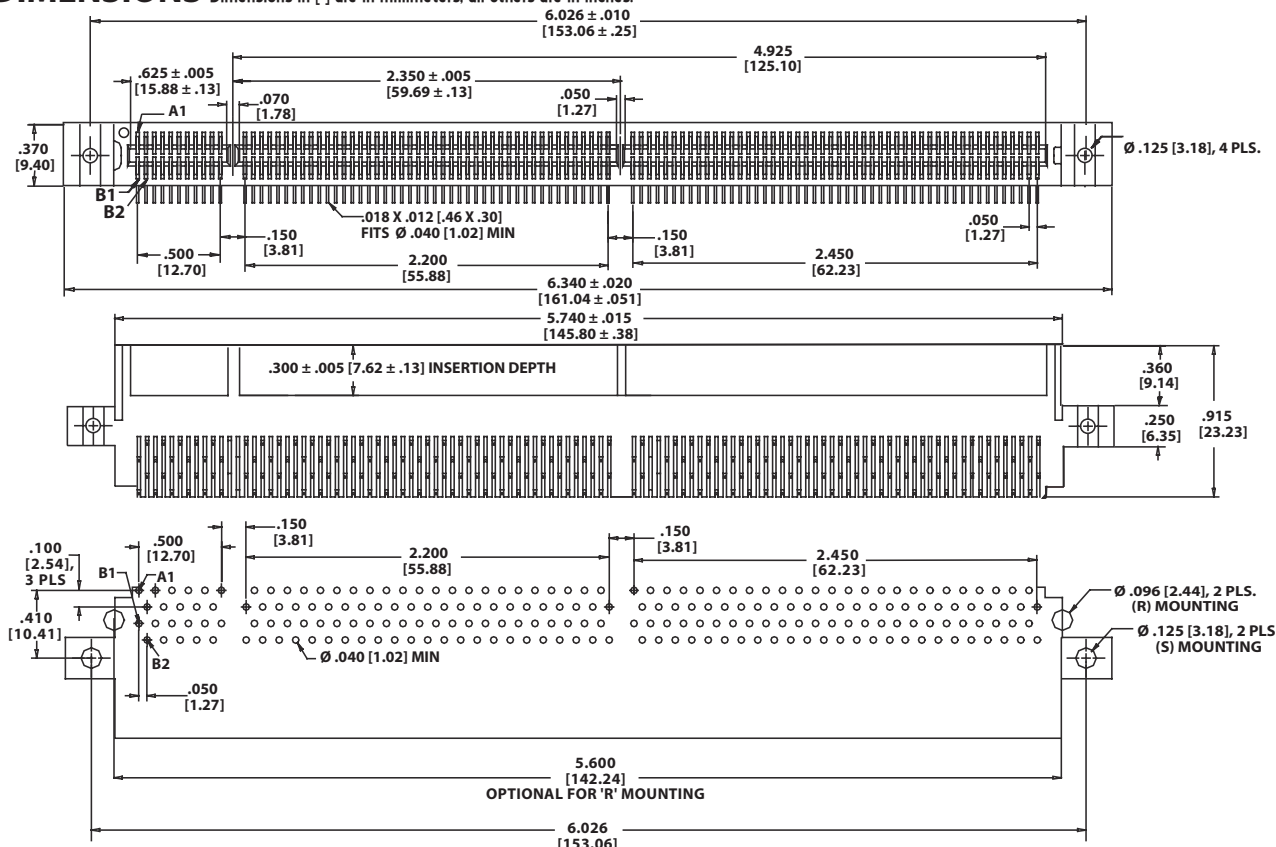

**BOARD LAYOUT, CONNECTOR SIDE
GBB106DHAS-S621, 64 BIT, 5 VOLT**