

A

B

C

D

E

F

CONFIGURATION:TWISTED PAIR AND ONE BY ONE

HPDB50M

HPDB50M







DATE BY

REVISION

HPDB50 MALE

900±30

HPDB50 MALE

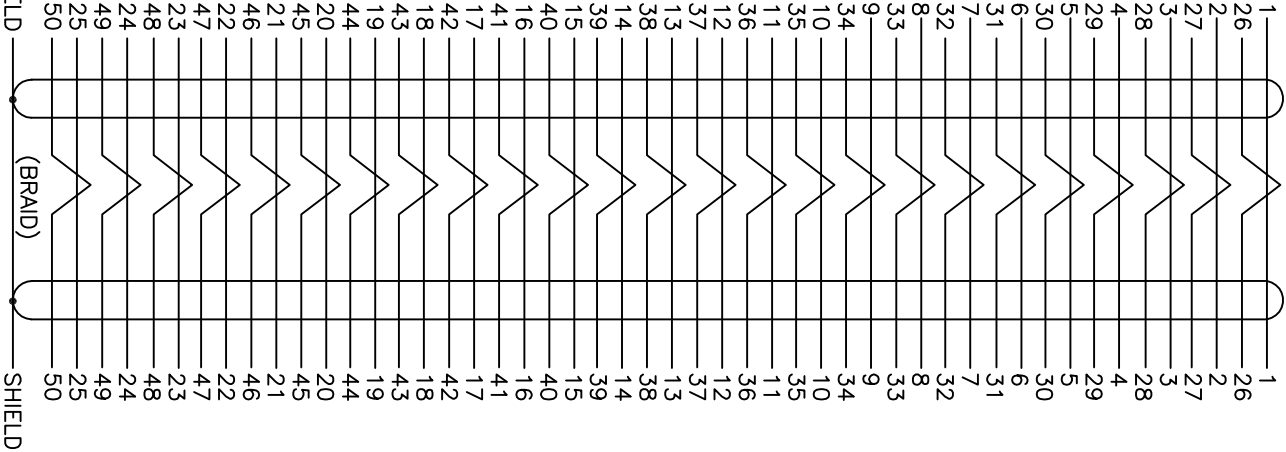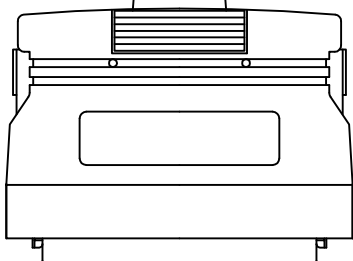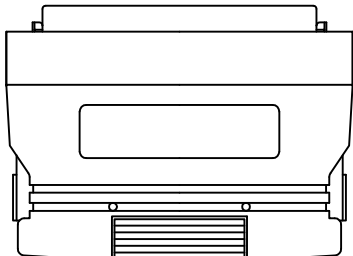

MAT'L:

1.CABLE:#28,UL2919,25P+1+AL/MY+B,O.D:9.5

INSULATION OF CONDUCTOR WITH P.P(ø0.75)

2.CONNECTOR:HPDB50M,I.D.C

3.COPPER TAPE:(10 X 105)+(25 X 85)

NOTE:

1.TOTAL LENGTH:900±30mm

CABLE CUT:950mm

2.COLOR:BEIGE

3.MOLDED TYPE

4.360° SOLDER

5.ROHS COMPLIANT

DATE 30 MAY,2000 PARTS NO SC2301M

UNIT MM DRAWN NO 001015

SCALE BUYER NO 002

TITLE:

HPDB50 MALE-HPDB50 MALE

NO.

#28,UL2919,25P+1+AL/MY+B,O.D:9.5,BEIGE

DESCRIPTION

QTY

1

HPDB50M,I.D.C

2

2

DRAWN

Y.C.C

CHECK

APPRO

5/30

ASSMANN ELECTRONICS, INC.