

A

B

C

D

E

F

CONFIGURATION:TWISTED PAIR AND ONE BY ONE

HPDB50M

HPDB50M






DATE BY

REVISION

HPDB50 MALE

2000±50


HPDB50 MALE

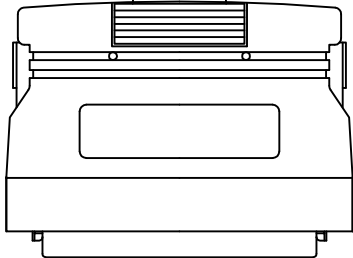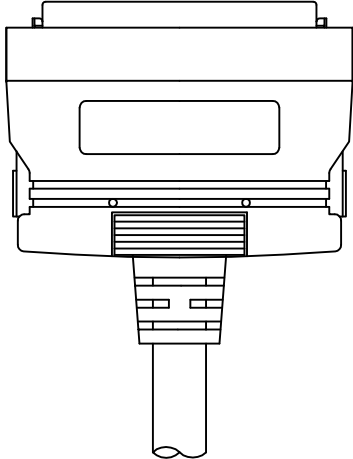

- MAT'L:
- 1.CABLE:#28,UL2919,25P+1+AL/MY+B,O.D:9.5
 - INSULATION OF CONDUCTOR WITH P.P(ø0.75)
 - 2.CONNECTOR:HPDB50M,I.D.C
 - 3.COPPER TAPE:(10 X 105)+(25 X 85)

NOTE:

- 1.TOTAL LENGTH:2000±50mm
- 2.COLOR:BEIGE
- 3.MOLDED TYPE
- 4.360° SOLDER
- 5.ROHS COMPLIANT

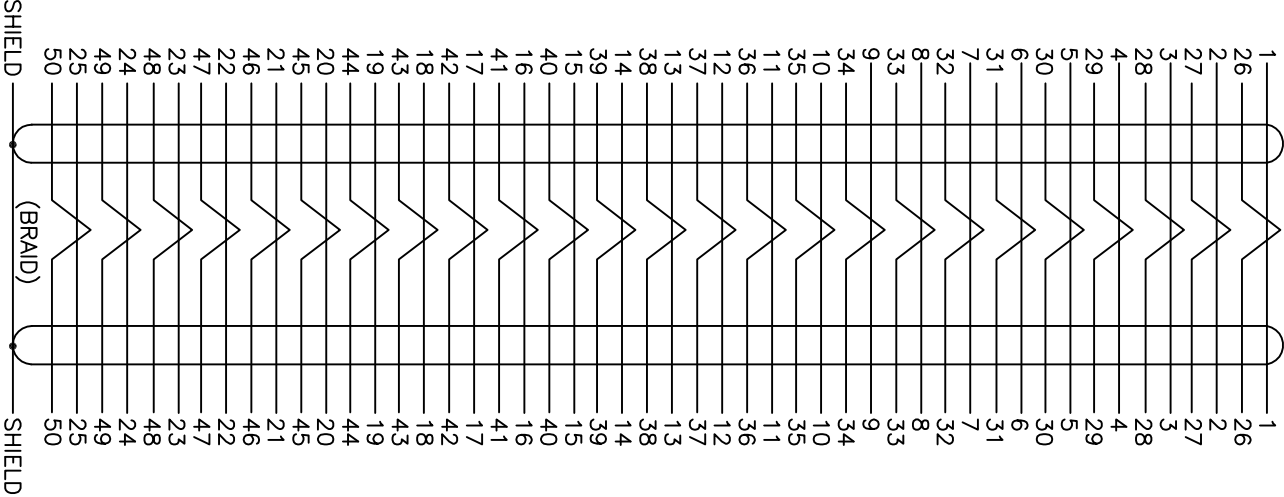

DATE 30 MAY,2000 PARTS NO SC2301M

TITLE: HPDB50 MALE-HPDB50 MALE (MOLDED TYPE)

UNIT MM	DRAWN NO 001016		
SCALE	BUYER NO 002		
		NO. ②	#28,UL2919,25P+1+AL/MY+B,O.D:9.5,BEIGE 2M
		①	HPDB50M,I.D.C 2
		DESCRIPTION	
		QTY	

DRAWN Y.C.C 5/30 CHECK APPRO

ASSMANN ELECTRONICS, INC.