

1

2

3

4

A

B

C

D


A

B

C

D


DB25 Male



23mm

3000±50


CN36 Male

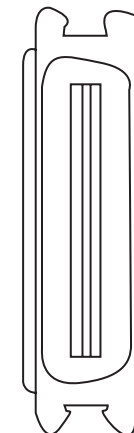

Configuration:

DB25M

CN36M

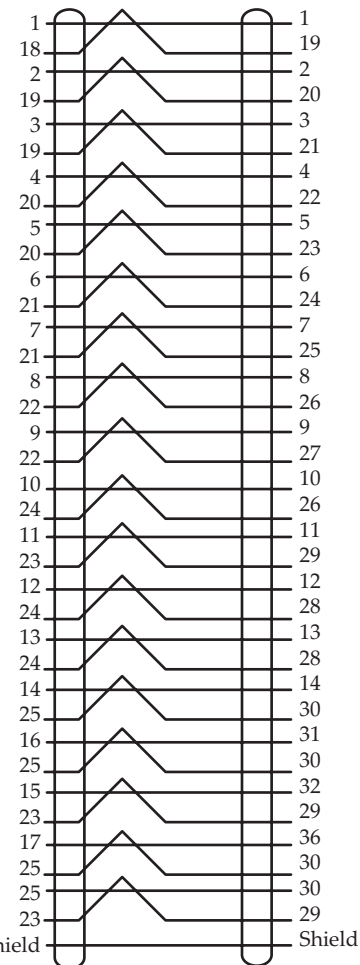

+0.5mm
3.5-0mm

Material:

1. Cable: UL20276, #28, 18PAIRS+1+AL/MY+Braid
(Beige PVC Jacket) O.D:7.5mm
Insulation conduct with P.P Type
2. Both connectors with normal type
3. Thumbscrew: #4-40UNC Type
4. Both connectors inner molded with copper tape and solder(360°)
Allover Molded with Beige PVC
Copper Tape Size:
DB25 Male: (30mmX95mm)
CN36 Male: (30mmX110mm)

Note:

1. Total Length: 3000±50mm
2. Color: Beige
3. Molded Type



Description

Name :

AK712-3-R

DB25 Male-CN36 Male

ASSMANN
Electronic Components

1

2

3

4

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.