


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
© 2005, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	0.2	W
MAX INPUT POWER	0.4	W
IMPEDANCE	8±15%	OHM
OUTPUT SPL @ 0.2W/0.1M (AT 1.5, 2.0, 2.5, 3.0 kHz)	86±3	dBA
DISTORTION (MAX.)	10%	—
RESONANT FREQUENCY	1,050±20%	Hz
FREQUENCY RANGE	1,050 ~ 20,000	Hz
HOUSING MATERIAL	METAL	—
CONE MATERIAL	MYLAR	—
MAGNET MATERIAL	Nd-Fe-B	—
OPERATING TEMPERATURE	-20 ~ +55	°C
WEIGHT	0.7	grams

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	8/4/05	

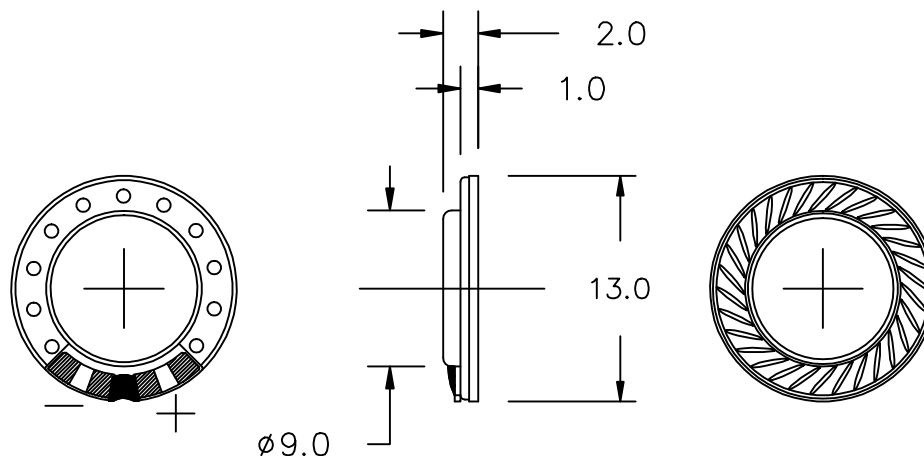

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ±0.3 AND
ANGLES ARE ±3°.

APPROVALS	DATE
DRAWN J.A.F.	8/05
CHECKED B.R.	8/05
APPROVED E.P.	8/05

DO NOT SCALE DRAWING



Dayton, Ohio

MICRO DYNAMIC SPEAKER

SIZE A DRAWING NO. AS01308MR-R

SCALE: N.T.S.

SHEET 1 OF 1

FILE NAME
AS01308MR-R.DWG