
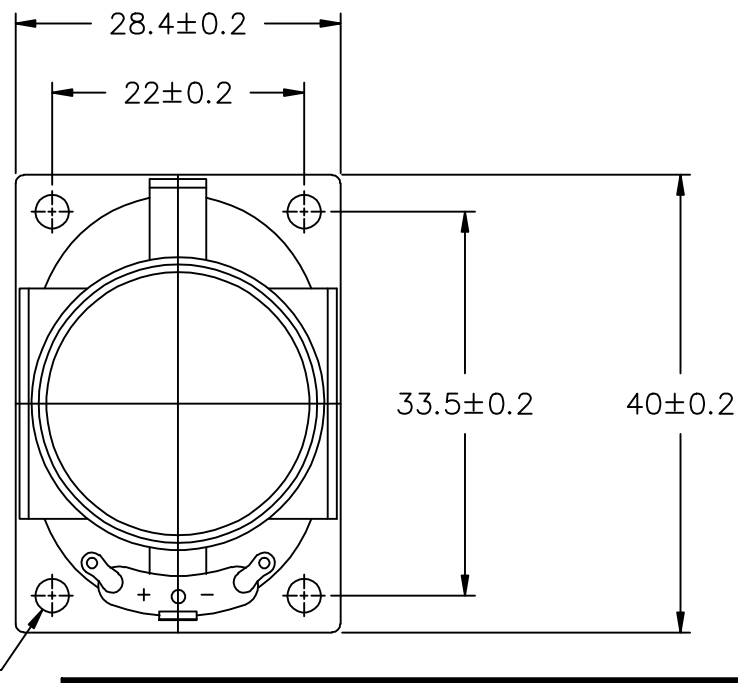


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
© 2005, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	2	W
MAX INPUT POWER	4	W
IMPEDANCE	4±15%	OHM
OUTPUT SPL @ 1W/0.5M (AT 0.8, 1.0, 1.2, 1.5 kHz)	87±3	dBA
DISTORTION (MAX.)	5%	—
RESONANT FREQUENCY	370±20%	Hz
FREQUENCY RANGE	200 ~ 20,000	Hz
HOUSING MATERIAL	ABS	—
CONE MATERIAL	PAPER	—
MAGNET MATERIAL	Nd-Fe-B	—
OPERATING TEMPERATURE	-40 ~ +85	°C
WEIGHT	16.5	grams

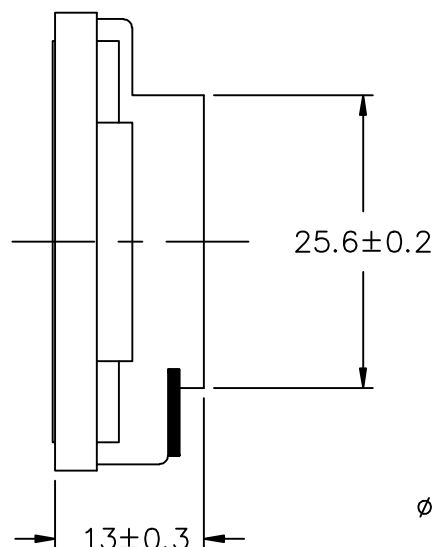

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS.
- SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- THIS PART IS RoHS 2002/95/EC COMPLIANT.

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	12/7/05	
A	ADDED MOUNTING HOLE DIMENSION	12/18/07	R.W.
B	REVISED MAX INPUT POWER	7/18/08	B.R.
C	REVISED OPERATING TEMPERATURE	10/14/08	C.W.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3°.



6300 Sand Lake Road
Dayton, Ohio 45414

APPROVALS	DATE
DRAWN J.A.F.	12/05
CHECKED B.R.	12/05
APPROVED E.P.	12/05

SPEAKER	
SIZE A	DRAWING NO. AS04004PO-R
SCALE: N.T.S.	SHEET 1 OF 1

FILE NAME
AS04004PO-R.DWG