


THIS DOCUMENT CONTAINS DATA PROPRIETARY
TO PROJECTS UNLIMITED, INC. ANY USE OR
REPRODUCTION, IN ANY FORM, WITHOUT PRIOR
WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC.
IS PROHIBITED.

©2005, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	1.5	W
MAX INPUT POWER	2	W
IMPEDANCE	8±15%	OHM
OUTPUT SPL @ 0.1W/0.1M (AT 0.6, 0.8, 1.0, 1.2 kHz)	92±3	dBA
DISTORTION (MAX.)	5%	—
RESONANT FREQUENCY	350±70%	Hz
FREQUENCY RANGE	350 ~ 20000	Hz
HOUSING MATERIAL	METAL	—
CONE MATERIAL	MYLAR	—
MAGNET MATERIAL	N35	—
OPERATING TEMPERATURE	-10 ~ +40	°C
WEIGHT	13.2	grams

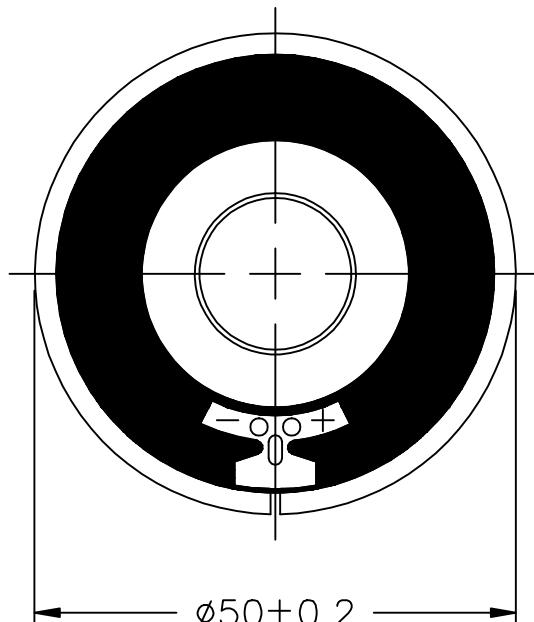


NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE
OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	2/22/06	

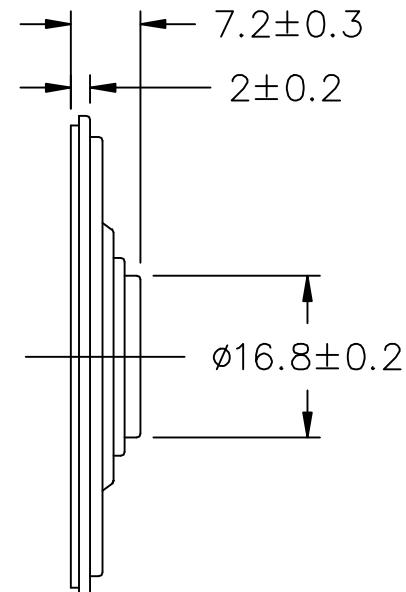

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3°.



Dayton, Ohio

SPEAKER

FILE NAME
AS05008MR-4-R.DWG

APPROVALS	DATE	SIZE A	DRAWING NO.	
DRAWN J.A.F.	02/06		AS05008MR-4-R	
CHECKED B.R.	02/06			
APPROVED E.P.	02/06		SCALE: N.T.S.	SHEET 1 OF 1
DO NOT SCALE DRAWING				