


SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	2	W
MAX INPUT POWER	4	W
IMPEDANCE	8±15%	OHM
OUTPUT SPL @ 1W/1M (AT 0.6, .8, 1.0, 1.2, 1.5 kHz)	88±3	dBa
DISTORTION (MAX.)	7%	—
RESONANT FREQUENCY	400±20%	Hz
FREQUENCY RANGE	400 ~ 13,000	Hz
HOUSING MATERIAL	METAL	—
CONE MATERIAL	MYLAR	—
MAGNET MATERIAL	FERRITE	—
OPERATING TEMPERATURE	-25 ~ +55	°C
WEIGHT	182.2	grams


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	3/10/05	
A	REMOVED LEAD FREE ADDED RoHS NOTE	8/10/05	

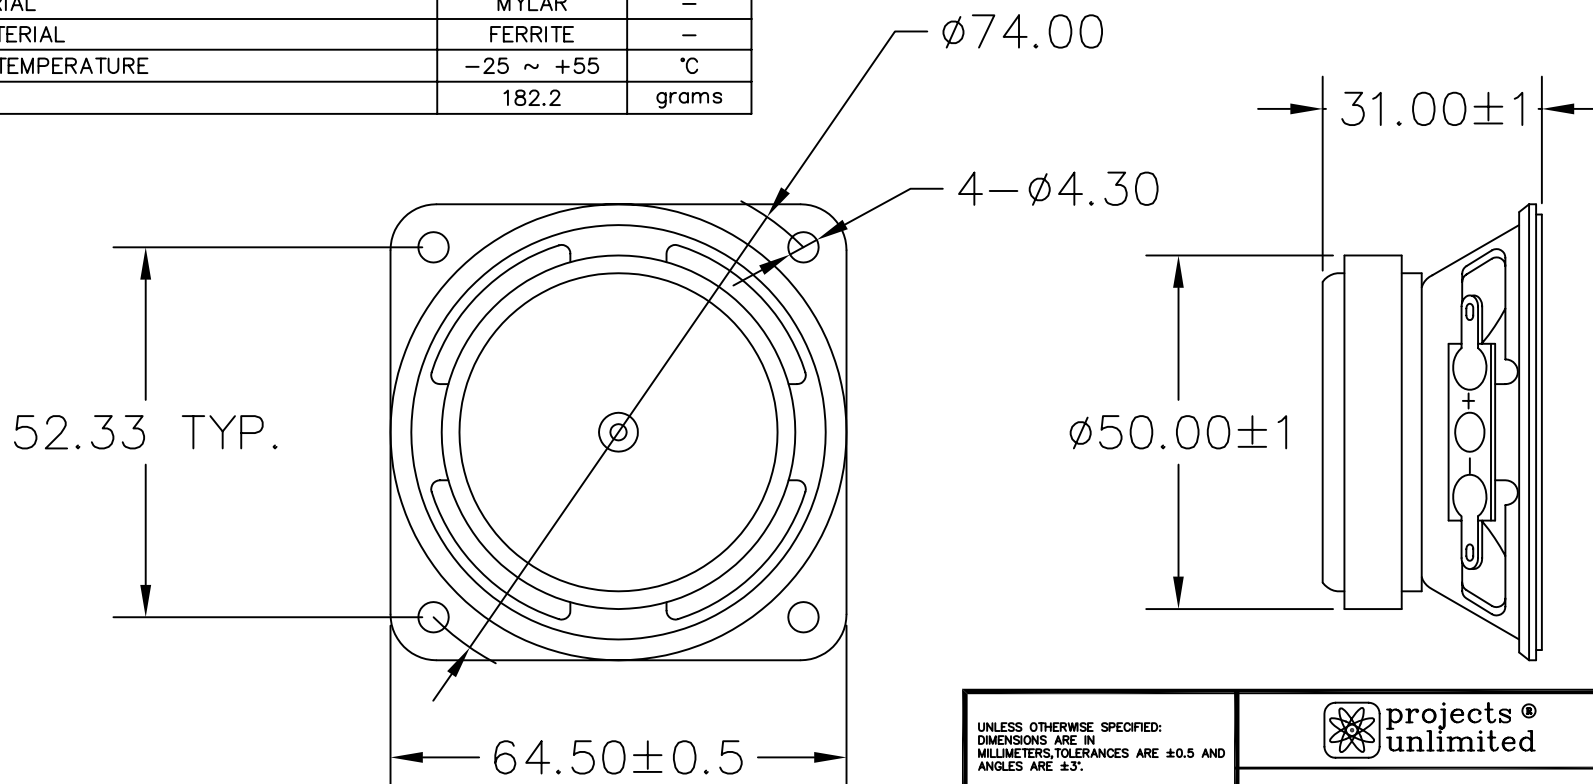

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

FILE NAME
AS06508MS-R.DWG

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ± 0.5 AND ANGLES ARE $\pm 3^\circ$.		 projects® unlimited		Dayton , Ohio	
APPROVALS		DATE		SPEAKER	
DRAWN	G. V.	3/9/05			
CHECKED	B. R.	3/10/05			
APPROVED	E. P.	3/10/05			
DO NOT SCALE DRAWING		SIZE	DRAWING NO.		
		A	AS06508MS-R		
		SCALE: N.T.S.	SHEET 1 OF 1		