



THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
© 2003, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	0.5	W
MAX INPUT POWER	0.8	W
IMPEDANCE	8	OHM
OUTPUT SPL @ 1W/1M (AT 600, 800, 1,000, 1,200 Hz)	84±3	dBa
DISTORTION	5%	—
RESONANT FREQUENCY	380±20%	Hz
FREQUENCY RANGE	380 ~ 7,500	Hz
HOUSING MATERIAL	METAL	—
CONE MATERIAL	MYLAR	—
MAGNET MATERIAL	FERRITE	—
OPERATING TEMPERATURE	-10 ~ +40	°C
WEIGHT	18	grams

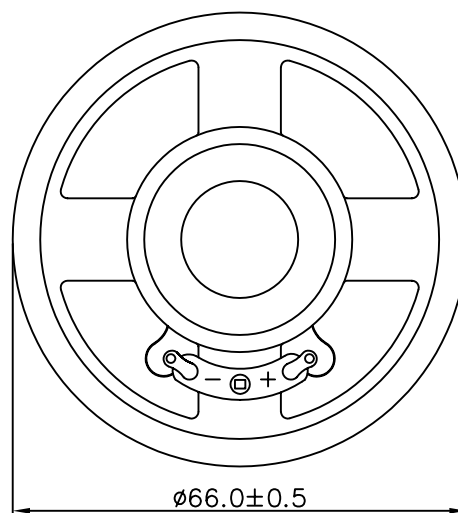

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	8/11/05	
A	REVISED OUTPUT SPL DISTANCE	11/10/06	D.F.

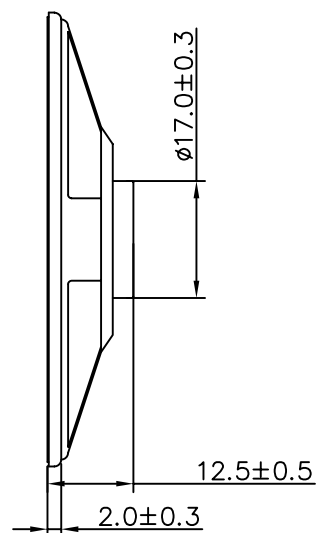

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS.
- SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- THIS PART IS RoHS 2002/95/EC COMPLIANT.

FILE NAME
AS06608MR-R.DWG

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.		 projects® unlimited		Dayton , Ohio	
APPROVALS		DATE		SPEAKER AS06608MR-R	
DRAWN	J. A. F.	8/05			
APPROVED	E. P.	8/05			
B. R.		8/05		SIZE A	DRAWING NO. AS06608MR-R
DO NOT SCALE DRAWING		SCALE: N.T.S.		SHEET 1 OF 1	