


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.  
© 2005, Projects Unlimited Inc.

## SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	15	W
MAX INPUT POWER	20	W
IMPEDANCE	8±15%	OHM
OUTPUT SPL @ 1W/1M (AT 0.8, 1.0, 1.2, 1.5 kHz)	93±3	dBA
DISTORTION (MAX.)	7%	—
RESONANT FREQUENCY	170±20%	Hz
FREQUENCY RANGE	170 ~ 15000	Hz
HOUSING MATERIAL	METAL	—
CONE MATERIAL	TREATED PAPER	—
MAGNET MATERIAL	FERRITE	—
OPERATING TEMPERATURE	-40 ~ +85	°C
WEIGHT	476	grams

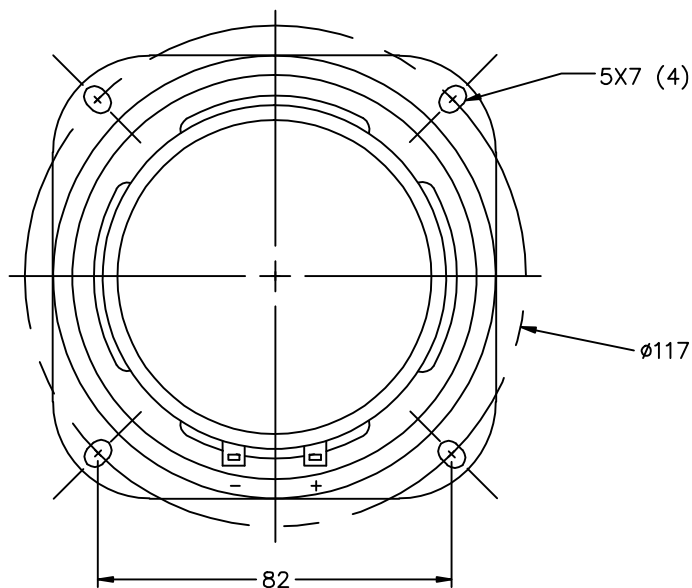


### NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS.
- SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- THIS PART IS RoHS 2002/95/EC COMPLIANT.
- CONE HAS BEEN TREATED FOR WATER RESISTANCE.

FILE NAME  
AS10308PS-WR-R.DWG

## REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	7/5/06	
A	REVISED OPERATING TEMPERATURE	9/29/06	B.R.

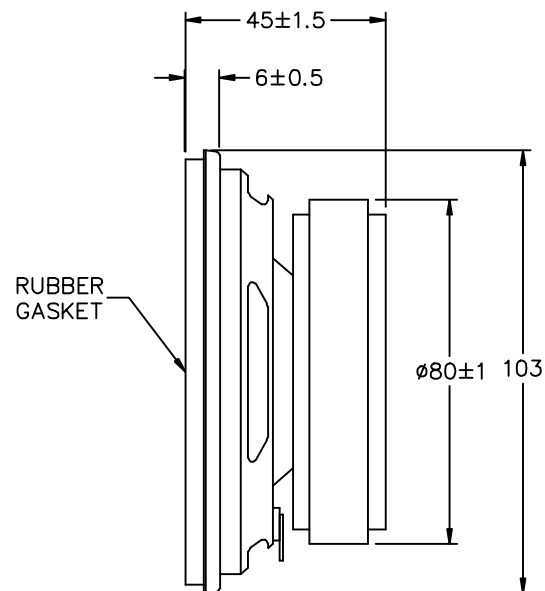

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN  
MILLIMETERS, TOLERANCES ARE ±0.5 AND  
ANGLES ARE ±3°.

APPROVALS	DATE
DRAWN J.D.	7/06
CHECKED E.P.	7/06
APPROVED B.R.	7/06

DO NOT SCALE DRAWING



Dayton , Ohio

# SPEAKER

DRAWING NO.  
AS10308PS-WR-R

SCALE: N.T.S.

SHEET 1 OF 1