


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
© 2005, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	0.2	W
MAX INPUT POWER	0.5	W
IMPEDANCE (3Khz @ 1V)	32±15%	OHM
OUTPUT SPL @ 0.2W/10cm (AT 2.0, 2.5, 3.0, 4.0 kHz)	90±3	dBA
DISTORTION (MAX.)	10%	—
RESONANT FREQUENCY	1,800±20%	Hz
FREQUENCY RANGE	1,700 ~ 20,000	Hz
HOUSING MATERIAL	PBT	—
CONE MATERIAL	MYLAR	—
MAGNET MATERIAL	Nd-Fe-B	—
OPERATING TEMPERATURE	-20 ~ +55	°C
WEIGHT	2.9	grams

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	3/29/06	
A	REVISED IMPEDANCE & FREQUENCY	11/20/06	B.R.
B	ADDED OVERALL HEIGHT DIMENSION	2/25/09	B.R.

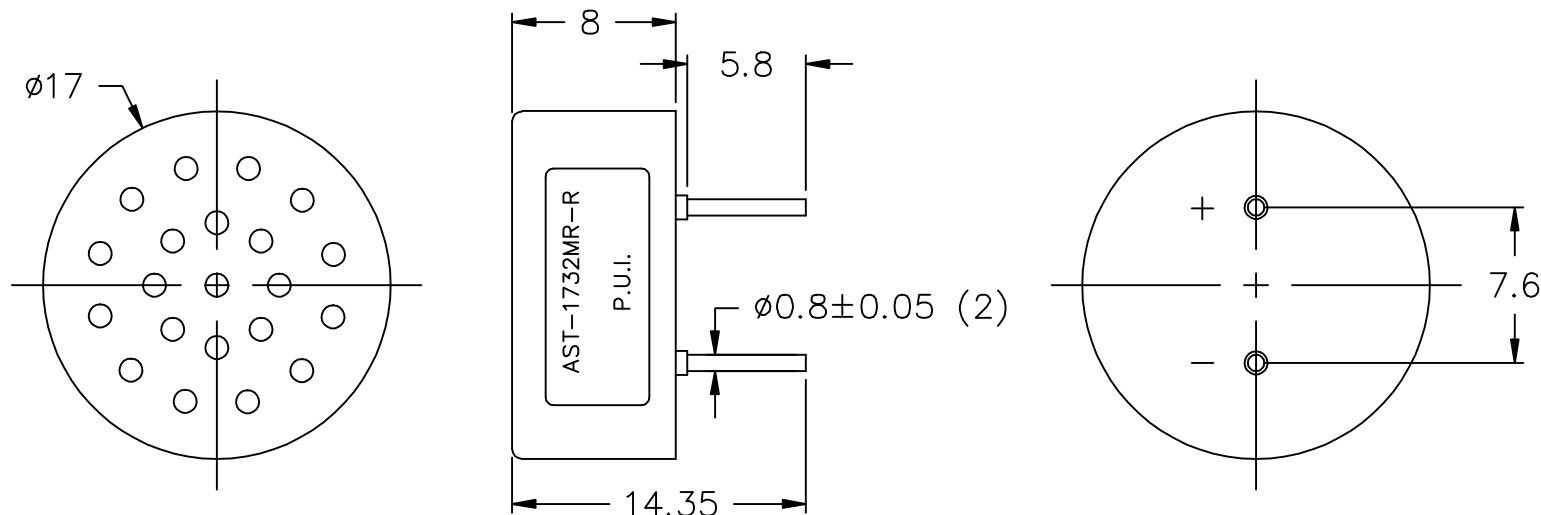

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

FILE NAME
AST-1732MR-R.DWG

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3°.

APPROVALS	DATE
DRAWN <i>B.R.</i>	3/06
CHECKED <i>B.R.</i>	3/06
APPROVED <i>E.P.</i>	3/06

DO NOT SCALE DRAWING



projects®
unlimited

Dayton, Ohio

SPEAKER

SIZE
A

DRAWING NO.
AST-1732MR-R

SCALE: N.T.S.

SHEET 1 OF 1