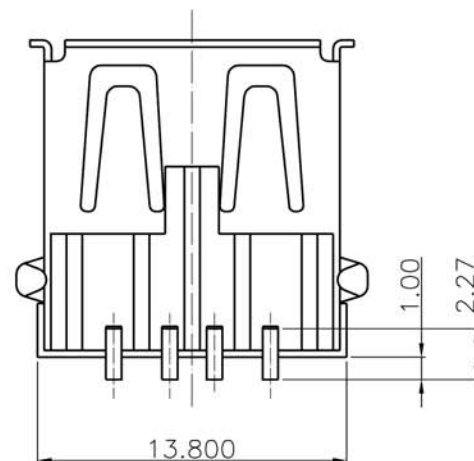
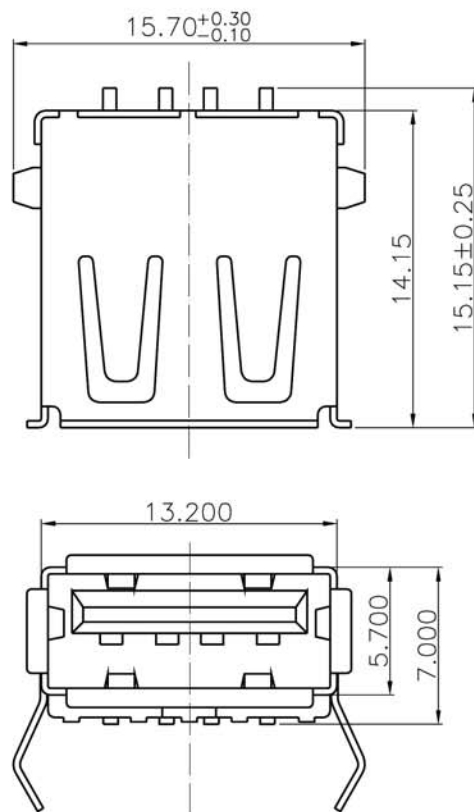


RECOMMENDED P.C.B. PATTERN LAYOUT

1.MATERIAL:
CONTACTS:BRASS
INSULATOR:PBT
SHELL:BRASS

2.MECHANICAL:
MATING:35N MAX.
WITHDRAWAL FORCE:10N MIN
DURABILITY:1500 CYCLES MIN

3.ELECTRICAL:
CURRENT-MAX[AMPS] 1.5A
VOLTAGE-MAX[VOLTS] 30V
WITHSTANDING VOLTAGE 500V AC
CONTACT RESISTANCE[OHMS] 30milliohms max
INSULATION RESISTANCE [OHMS] 1000 MEGOHMS MIN
4.PLATING:
CONTACTS: GOLD FLASH AND TIN OVER NICKEL PLATED
SHELL:NICKEL OVER ALL PLATING
5.ENVIRONMENTAL
TEMPERATURE RANGE:-55°C+50°C

RoHS
Compliant

ITEM NO

AU-Y1006-R (Type A, Version 1.1, 5μ" Gold)

AU-Y1006-2-R (Type A, Version 2.0, 30μ" Gold)

TITLE

USB, Type A, Angled, SMD, Black Insulator

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2008 by Assmann Electronic Components
All International Rights Reserved