


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
© 2005, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	24	Vdc
OPERATING VOLTAGE RANGE	9 ~ 28	Vdc
TONE OUTPUT	SEE 32 TONE CHART	—
CURRENT CONSUMPTION (NOMINAL)	SEE 32 TONE CHART	mA
INGRESS PROTECTION	IP33 	—
LENS COLOR	RED	—
FLASH RATE	1	PER/SECOND
CASE MATERIAL/COLOR	ABS/RED	—
TERMINAL	SCREW	—
OPERATING TEMPERATURE	-10 ~ +60	°C
WEIGHT	270	grams

DETAIL "A"



DETAIL "B"

VOLUME CONTROL



OPTIONAL BASES
DEEP BASE: AWA-DBR
U BASE: AWA-UBR
120Vac BASE: AWA-DBR-120

NOTES:


1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. FOR SECOND TONE, CONNECT THIRD WIRE TO-ve.
4. THIS PART IS RoHS 2002/95/EC COMPLIANT.
5. IP65 WITH USE OF AWA-DBR, AWA-DBR-120, OR AWA-UBR BASE.

FILE NAME
AVW-15LPNBR-RL.DWG


REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	12/15/05	
A	ADDED RoHS & REVISED BASE NOTES	5/21/07	R.W.

DETAIL "A" DETAIL "B"



DETAIL "A" DETAIL "B"

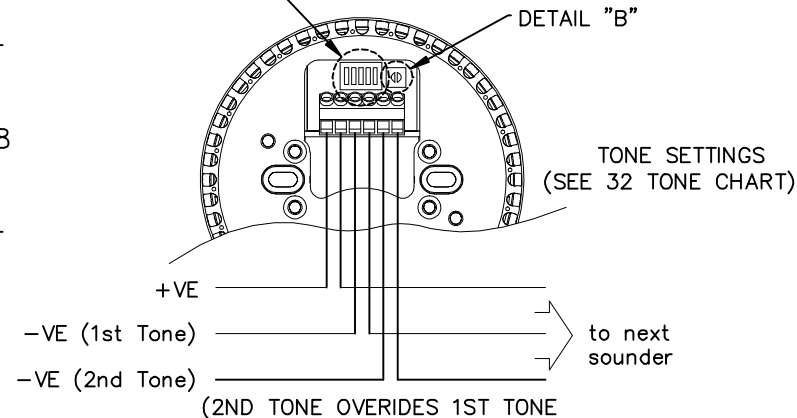

(2ND TONE OVERRIDES 1ST TONE)

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.
















projects®
unlimited

Dayton, Ohio

SIREN/STROBE

APPROVALS	DATE
DRAWN J.A.F.	12/05
CHECKED E.P.	12/05
APPROVED B.R.	12/05
DO NOT SCALE DRAWING	

SIZE	DRAWING NO.
A	AVW-15LPNBR-RL
SCALE: N.T.S.	SHEET 1 OF 1

Primary tone	Secondary tone	Switch setting	Tone description				Main Application	AVW-15LP				
			12345	Pattern	Frequency Hz	Rate		Depiction	12 VDC	12 Vdc on axis @1M	24 VDC	24Vdc on axis @1M
		mA	dB(A)	mA	dB(A)	dB(A)						
1	14	11111	Alternating	800 & 970	2Hz (250ms-250ms)		BS Fire tone	102	93	19	100	*
2	14	11110	Sweep	800 to 970	7Hz (7/s)		BS Fire tone	102	94	19	101	*
3	36	11101	Sweep	800 to 970	1Hz (1/s)		BS Fire tone	102	95	19	101	95
4	14	11100	Continuous	2850	Steady			108	104	33	110	*
5	4	11011	Sweep	2400 to 2850	7Hz			110	103	31	110	*
6	4	11010	Sweep	2400 to 2850	1Hz			109	103	31	110	*
7	14	11001	Slow whoop	300 to 1200	3s sweep, 0.5 s silence, then repeat		Dutch Fire tone	104	92	21	98	97
8	14	11000	Sweep (DIN)	1200 to 500	1Hz		Din tone	101	91	17	98	94
9	4	10111	Alternating	2400 & 2850	2Hz (250ms-250ms)			111	102	31	109	*
10	14	10110	Intermittent	970	0.5Hz (1s On/1s Off)			101	93	13	100	*
11	14	10101	Alternating	800 & 970	1Hz (500ms-500ms)		BS Fire tone	102	93	19	100	*
12	4	10100	Intermittent	2850	0.5Hz (1s On/1s Off)			106	102	25	109	*
13	14	10011	Intermittent	970	0.8Hz (250ms On/1s Off)			97	89	9	96	*
14	14	10010	Continuous	970	Steady		BS Fire tone	103	94	21	101	95
15	14	10001	Alternating	554 & 440	100ms-400ms		French fire tone	99	87	13	93	*
16	16	10000	Intermittent	660	3.3Hz (150ms On/150msOff)		Swedish fire tone	98	80	10	86	*
17	17	01111	Intermittent	660	0.28Hz(1.8s On/1.8s Off)		Swedish fire tone	99	83	13	88	*
18	18	01110	Intermittent	660	0.05Hz (13s Off / 6.5Hz On)		Swedish fire tone	100	83	15	88	*
19	19	01101	Continuous	660	Steady		Swedish fire tone	100	83	15	89	*
20	20	01100	Alternating	554 & 440	0.5Hz (1s On/1s Off)		Swedish fire tone	99	90	14	96	*
21	21	01011	Intermittent	660	1Hz (500ms-500ms)		Swedish fire tone	98	81	11	87	*
22	14	01010	Intermittent	2850	4Hz (150ms On/100ms Off)		Pelican crossing	105	101	23	109	*
23	14	01001	Sweep	800 to 970	50Hz		BS Fire tone	102	95	19	101	*
24	4	01000	Sweep	2400 to 2850	50Hz			106	103	26	110	*
25	25	00111	Intermittent	970	3 x 500ms pulses followed by 1.5s silence then repeat		ISO 8201	101	92	15	99	*
26	26	00110	Intermittent	2850	3 x 500ms pulses followed by 1.5s silence then repeat		ISO 8201	104	101	21	108	*
27	27	00101	Continuous	4000	Steady			110	75	36	83	*
28	10	00100	Alternating	800 & 970	2Hz (250ms-250ms)		BS Fire tone	102	93	18	100	*
29	33	00011	Alternating	990 & 650	2Hz (250ms-250ms) (Symphoni tones)		BS Fire tone	107	92	22	99	96
30	36	00010	Alternating	510 & 610	2Hz (250ms-250ms) (Squashni Micro tones)		BS Fire tone	103	91	16	96	92
31	31	00001	Sweep	300 to 1200	1Hz			107	90	22	96	*
32	32	00000	Continuous	4000	Steady			110	75	36	83	*

Note (a): Tones approved under the Construction Products Directive for Fire Alarm Applications, are shown in the column marked EN54-3.

Note (b): EN54-3 measurements shown reflect minimum expected SPL readings at Maximum Volume at the Loudest Point around the EN54-3 defined sounder axis.

Note (c): All other tone measurements reflect manufacturers data based on 'on axis' measurements, and are not verified by a Notified body.

Note (d): All measurements taken at 20oC operating temperature.