



SAW Components

Data Sheet B7808

Data Sheet

An abstract, grayscale graphic featuring the word "EPCOS" in large, bold, sans-serif letters. The letters are partially obscured by a series of overlapping, curved, metallic-looking bands that create a sense of depth and motion. The background is dark and textured.



SAW Components

B7808

Low Loss Filter for Mobile Communication

2140,0 MHz

Data Sheet




Chip sized SAW package DCS4A

Features

- Low-loss RF filter for W-CDMA system, receiving path
- Usable passband 60 MHz
- No matching network required for operation at 50 Ω
- Ceramic package for Surface Mounted technology (SMT)

Terminals


- Ni, gold-plated

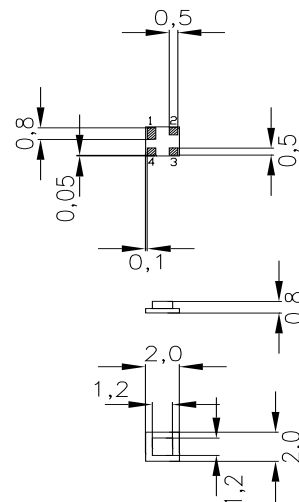

Dimensions in mm, approx. weight 0,01 g

Pin configuration

- | | |
|---|-----------------|
| 2 | Input |
| 1 | Input - ground |
| 3 | Output |
| 4 | Output - ground |



Type	Ordering code	Marking and Package according to	Packing according to
B7808	B39212-B7808-A510	C61157-A7-A63	F61074-V8099-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 20/+ 85	$^{\circ}\text{C}$	
Storage temperature range	T_{stg}	- 40/+ 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
Source power	P_{s}	10	dBm	source impedance 50 Ω



SAW Components

B7808

Low Loss Filter for Mobile Communication

2140,0 MHz

Data Sheet



Characteristics

Operating temperature range: $T = 25^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 50\ \Omega$

				min.	typ.	max.	
Center frequency	f_c			—	2140,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$						
	2110,0 ... 2170,0	MHz		—	2,5	3,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$						
	2110,0 ... 2170,0	MHz		—	0,6	1,0	dB
Amplitude ripple (p-p) per 5-MHz channel	$\Delta\alpha_{\text{ch}}$						
	2110,0 ... 2170,0	MHz		—	0,3	0,5	dB
VSWR							
Input	2110,0 ... 2170,0	MHz		—	1,8	2,0	
Output	2110,0 ... 2170,0	MHz		—	1,8	2,0	
Attenuation	α						
	0,0 ... 1730,0	MHz		15,0	18,0	—	dB
	1730,0 ... 1980,0	MHz		22,0	25,0	—	dB
	1980,0 ... 2050,0	MHz		17,0	20,0	—	dB
	2230,0 ... 2255,0	MHz		25,0	29,0	—	dB
	2255,0 ... 2490,0	MHz		25,0	30,0	—	dB
	2490,0 ... 2550,0	MHz		25,0	30,0	—	dB
	2550,0 ... 2930,0	MHz		22,0	24,0	—	dB
	2930,0 ... 6000,0	MHz		14,0	16,0	—	dB



SAW Components

B7808

Low Loss Filter for Mobile Communication

2140,0 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -20$ to $+85^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 50\ \Omega$

				min.	typ.	max.	
Center frequency	f_c			—	2140,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$						
	2110,0 ... 2170,0	MHz		—	3,0	3,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$						
	2110,0 ... 2170,0	MHz		—	0,9	1,2	dB
Amplitude ripple (p-p) per 5-MHz channel	$\Delta\alpha_{\text{ch}}$						
	2110,0 ... 2170,0	MHz		—	0,5	0,8	dB
VSWR							
Input	2110,0 ... 2170,0	MHz		—	2,0	2,2	
Output	2110,0 ... 2170,0	MHz		—	2,0	2,2	
Attenuation	α						
	0,0 ... 1730,0	MHz		15,0	18,0	—	dB
	1730,0 ... 1980,0	MHz		22,0	25,0	—	dB
	1980,0 ... 2050,0	MHz		17,0	20,0	—	dB
	2230,0 ... 2255,0	MHz		25,0	29,0	—	dB
	2255,0 ... 2490,0	MHz		25,0	30,0	—	dB
	2490,0 ... 2550,0	MHz		25,0	30,0	—	dB
	2550,0 ... 2930,0	MHz		22,0	24,0	—	dB
	2930,0 ... 6000,0	MHz		14,0	16,0	—	dB



SAW Components

B7808


Low Loss Filter for Mobile Communication

2140,0 MHz


Data Sheet



Frequency response (narrow band)

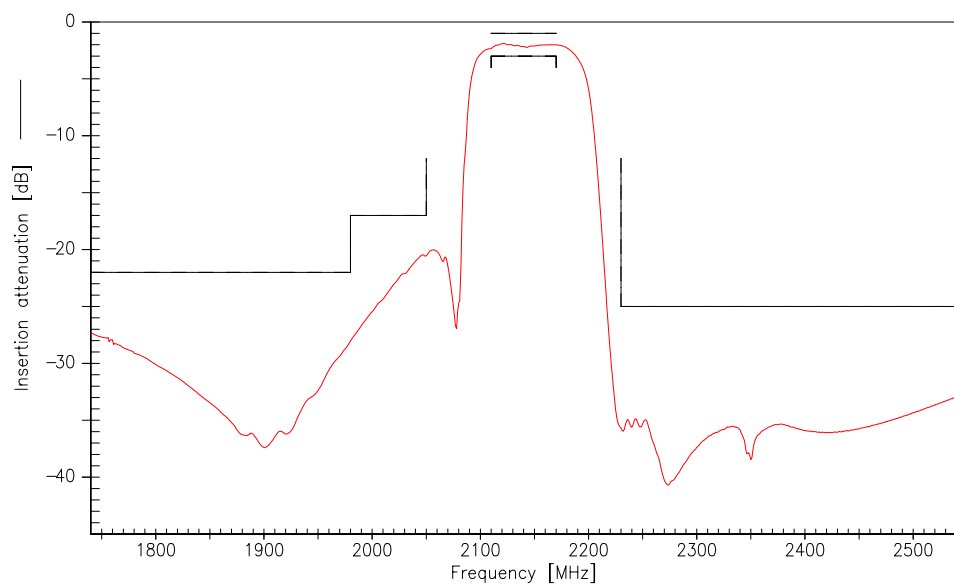

Frequency response (wide band)

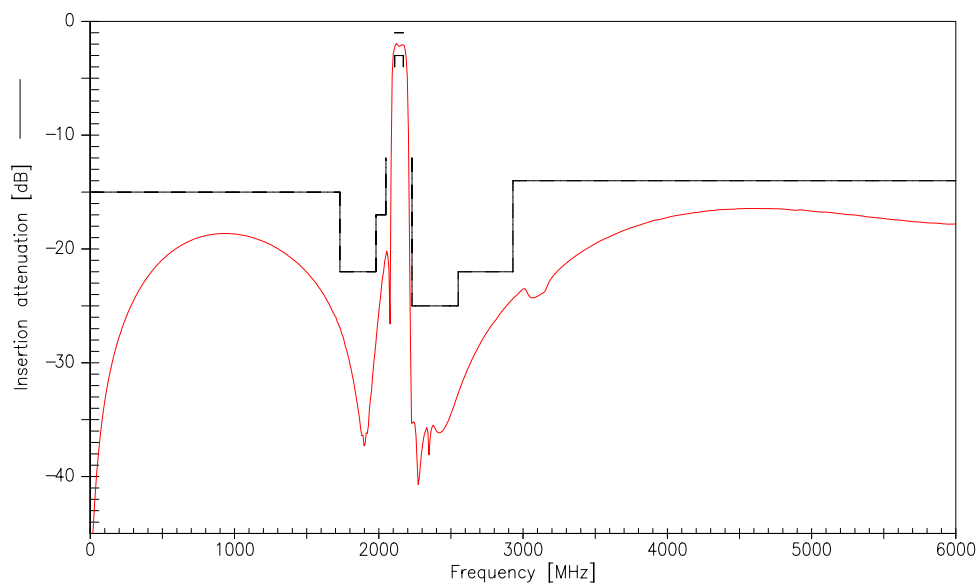



SAW Components	B7808
Low Loss Filter for Mobile Communication	2140,0 MHz
Data Sheet	SMD

Published by EPCOS AG

Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.