



SAW Components

Data Sheet B4637

Data Sheet

An abstract, grayscale graphic featuring a globe with a grid pattern, overlaid with a large, stylized, and slightly blurred "EPCOS" logo. The logo is rendered in a light gray, almost white, color, giving it a three-dimensional appearance as if it's floating or attached to the globe. The background is dark and textured, with some light streaks and a sense of motion or depth.

EPCOS



SAW Components

B4637

Low-Loss Filter for Mobile Communication

915,0 MHz

Data Sheet


Ceramic package DCC6

Features

- Low-loss RF filter for wireless communication
- Usable passband 26 MHz
- No matching network required for operation at 50 Ω
- Ceramic package for **Surface Mounted Technology (SMT)**

Terminals


- Ni, gold-plated

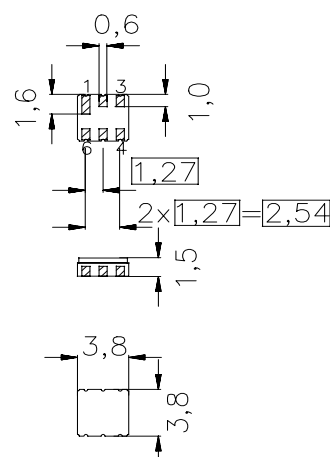

Dimensions in mm, approx. weight 0,07g

Pin configuration

2	Input
3	Input - ground
5	Output
4	Output - ground
1,6	Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B4637	B39921-B4637-Z610	C61157-A7-A41	F61074-V8030-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 / + 85	$^{\circ}\text{C}$	Machine Model, 10 pulses source and load impedance 50 Ω
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
ESD voltage	V_{ESD}^*	100	V	
Source power (cw)	P_{S}	10	dBm	

*-acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B4637

Low-Loss Filter for Mobile Communication

915,0 MHz

Data Sheet

Characteristics

Operating temperature range: $T = -25\text{ °C to }+85\text{ °C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Nominal frequency	f_N	—	915,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
902,0 ... 928,0 MHz		—	2,5	3,2	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
902,0 ... 928,0 MHz		—	1,3	2,0	dB
Absolute attenuation	α_{abs}				
10,0 ... 765,0 MHz		20	23	—	dB
765,0 ... 865,0 MHz		20	24	—	dB
965,0 ... 1065,0 MHz		22	26	—	dB
1065,0 ... 2000,0 MHz		18	21	—	dB
Temperature coefficient of frequency	TC_f	—	– 30	—	ppm/K



SAW Components


B4637

Low-Loss Filter for Mobile Communication


915,0 MHz

Data Sheet

Transfer function (narrow band)

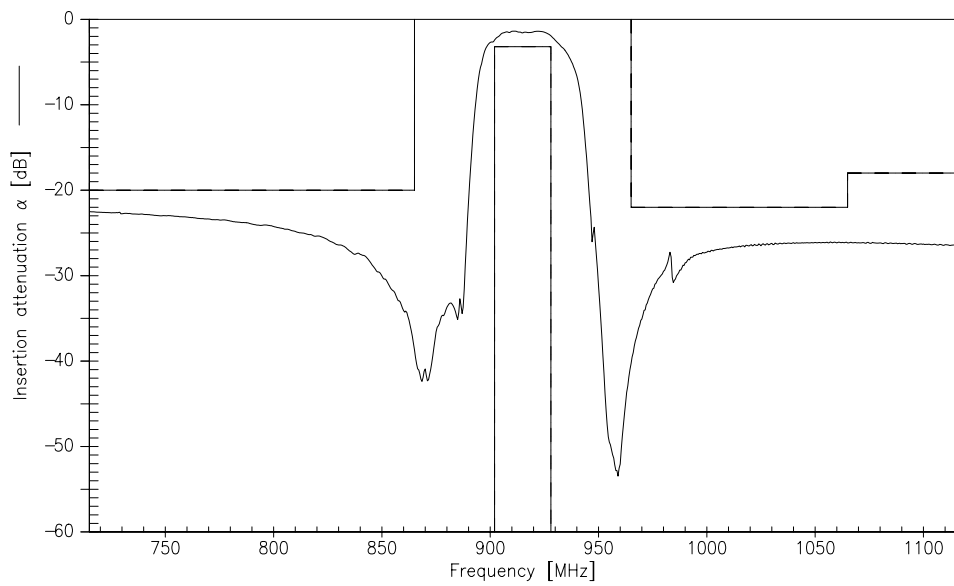

Transfer function (wide band)

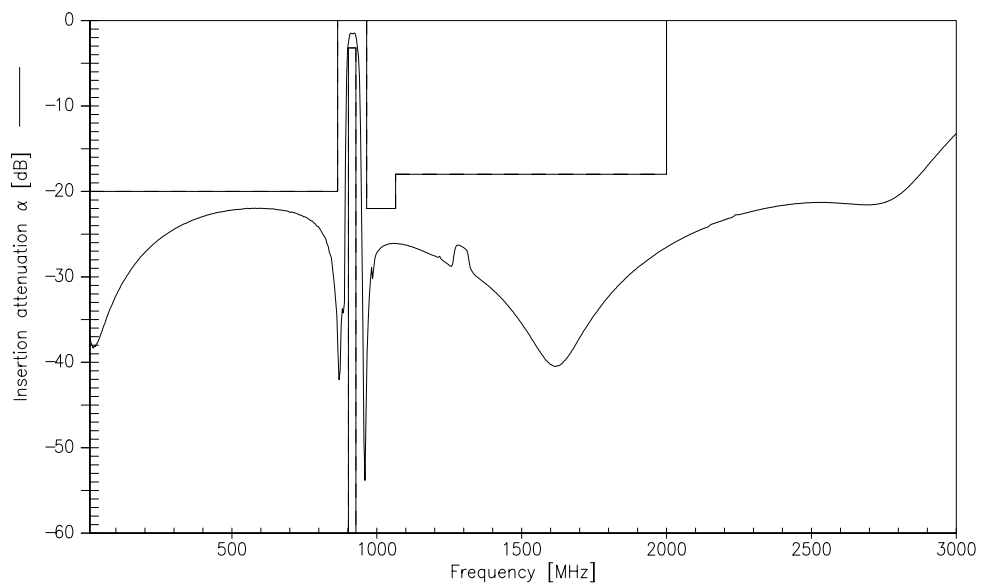



SAW Components

B4637

Low-Loss Filter for Mobile Communication

915,0 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2005. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.