


| DATE     | SYM | REVISION RECORD           | AUTH | DR.  | CK. |
|----------|-----|---------------------------|------|------|-----|
| 11/26/05 | A   | ADDED "ROHS COMPLIANT"    | T.B. | B.S. |     |
| 3/11/06  | B   | UPDATED MATERIAL SPEC.    | T.B. | B.S. |     |
| 5/06/06  | C   | ADDED CONTACT RESI. INFO. | T.B. | B.S. |     |
| 1/12/08  | D   | RANGE WAS "RANGEE"        | T.B. | B.S. |     |

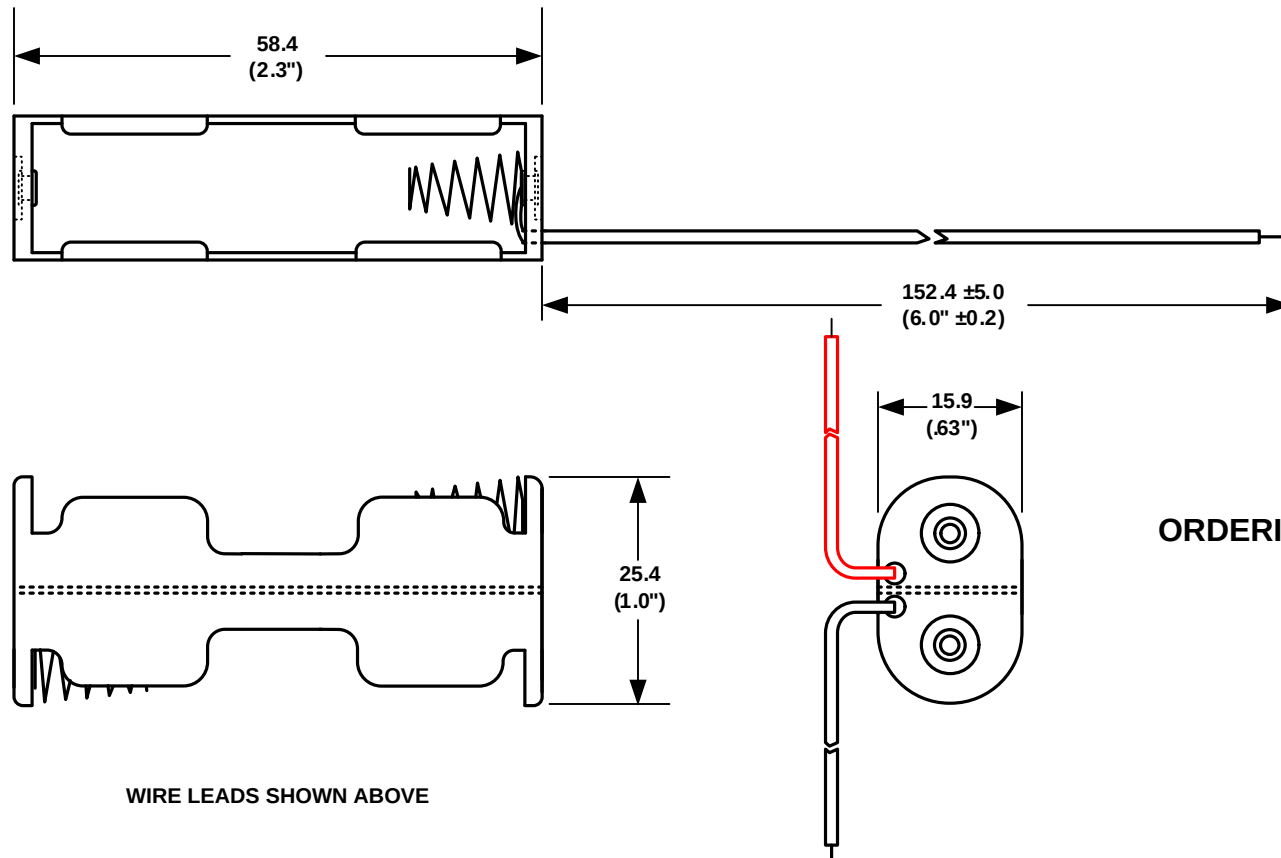

ORDERING CODE BC22AA

SOLDER LUGS = L  
( 6" ) WIRE LEADS = W  
9 VOLT TYPE SNAPS = SF

WIRE LEADS SHOWN ABOVE

## SPECIFICATIONS :

Plastic material - polypropylene  
 Flammability Rating-UL94 HB, UL File No. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - nickel plated spring steel  
 Wire - 152.4 mm Long 26 AWG, UL1007, CSA - TR-64, 300V, 80° C.  
 Rivets - Brass, nickel plated  
 9 Volts Snaps - Brass, nickel plated  
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000  
 ROHS COMPLIANT

**Note:** Dimensions in mm. ( inches )

|                                            |                                                                                                                                                                                    |                                  |               |               |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|---------------|---------------|
| TOLERANCES<br>(EXCEPT AS NOTED)            |  <b>Memory Protection Devices, Inc.</b><br>200 Broad Hollow Road, Farmingdale, New York 11735 |                                  |               |               |
| DECIMAL<br>+ .5 (.020")<br>- .5 (.020")    |                                                                                                                                                                                    |                                  | SCALE<br>NONE | DRAWN BY S.C. |
| FRACTIONAL<br>+ .8 (.030")<br>- .8 (.030") | TITLE<br><b>TWO "AA" CELL HOLDER</b>                                                                                                                                               |                                  |               |               |
| ANGULAR<br>+ 3°<br>- 3°                    | DATE<br>1/12/2008                                                                                                                                                                  | DRAWING NUMBER<br><b>BC22AAW</b> |               |               |