
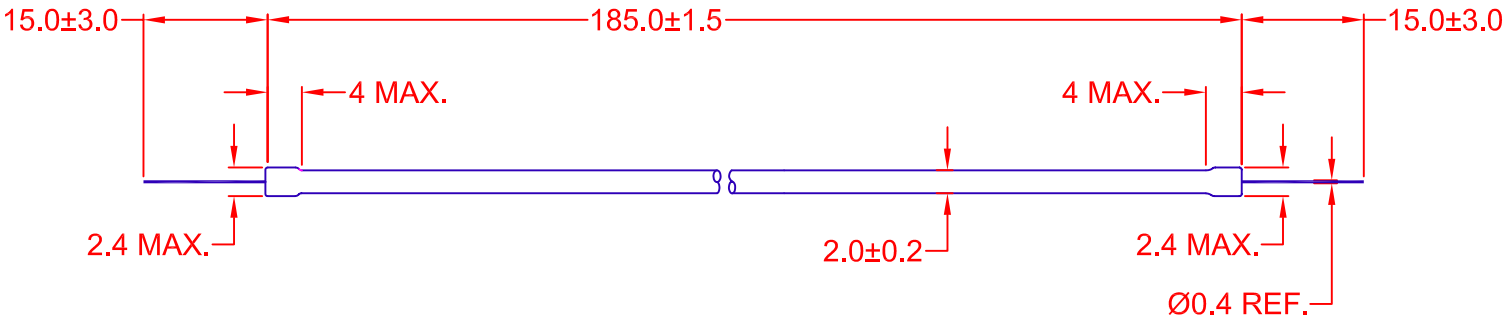




JKL LAMP PART NO.	COLOR RGB WHITE REF. 9700°k	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mA rms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS) (AVG.)
BF20185-25B	x = 0.28 ± 0.02 y = 0.26 ± 0.02	1050 @ 0°C	420	5	35,000 TYP.	10,000

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

NOTE 1: MERCURY (Hg) CONTENT: 2.4mg/LAMP MAX.

			METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0 ANGLE +/- 0		JKL COMPONENTS CORPORATION						
							TITLE						
							MINIATURE COLD CATHODE FLUORESCENT LAMP						
			DRAWN BY		APPV'D BY DATE		SIZE	FSCM NO.	DRAWING NO.				
			L. WENGSTROM		LEW 11/23/05		A	55335	BF20185-25B				
ENGINEERING RELEASE & CANCEL P-0505-02			11/23/05										
REV. NO.	DESCRIPTION/ECO NUMBER		APPV'D DATE	- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE	RELEASED DATE		REVISION DATE	REV. NO.	SHEET	
							NONE	11/23/05				1 OF 1	