
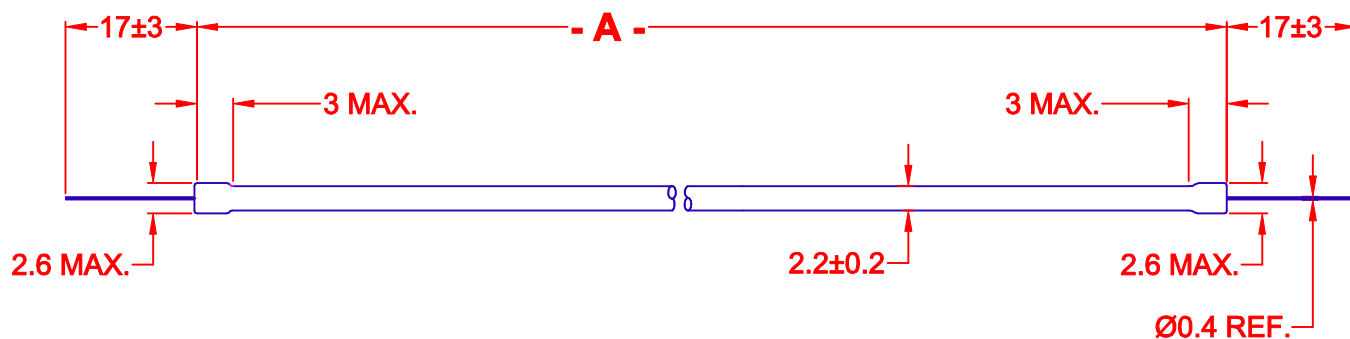


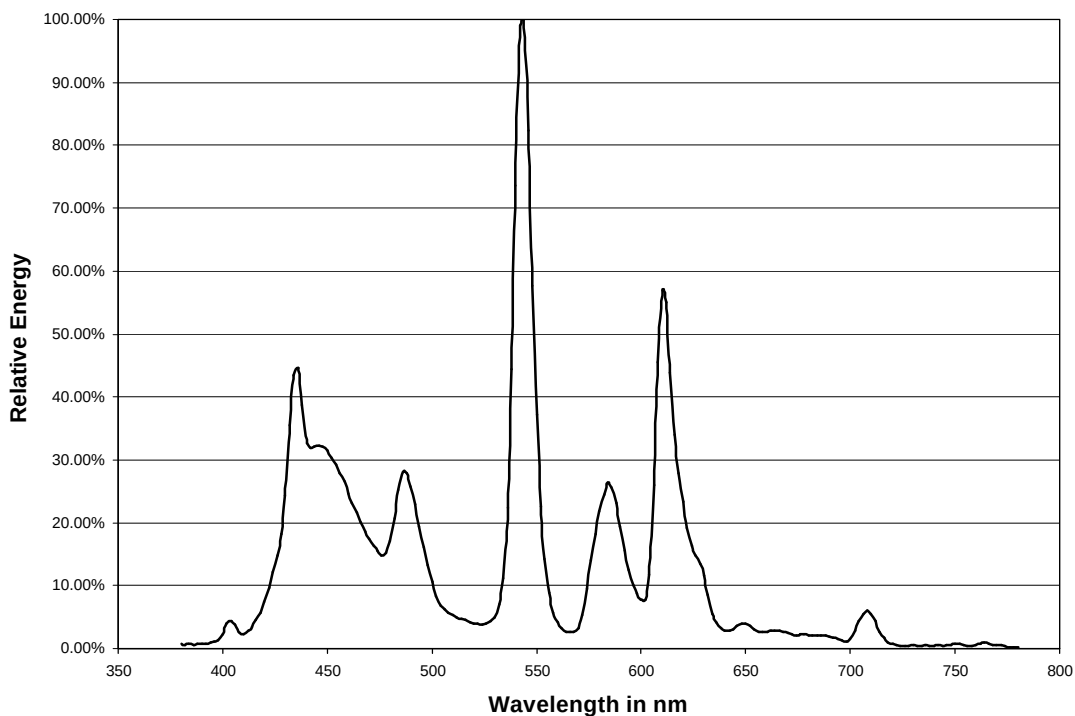

JKL PART NUMBER	- A - LENGTH	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mA rms)	BRIGHTNESS (CANDELA/m ²)	*RATED LIFE (HRS)
BF2261-24B	61±1.5	RGB HIGH OUTPUT WHITE 8400° KELVIN	600 @ 0°C	200	5 ± 1	38,000±10%	20,000
BF22140-24B	140±3.0		990 @ 0°C	330	5 ± 1	38,000±10%	20,000
BF22160-24B	160±3.0		1065 @ 0°C	355	5 ± 1	38,000±10%	20,000
BF22258-24B	258 ^{+3.0} _{-0.0}		1600 @ 0°C	535	5 ± 1	38,000±10%	20,000

*NOTE: RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

			METRIC THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0 ANGLE +/- 0		JKL COMPONENTS CORPORATION			
					TITLE		MINIATURE COLD CATHODE FLUORESCENT LAMP			
B	ADD BF2261-24B	6/19/04	DRAWN BY	APPV'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.		
A	CORRECTION ON LENGTH DIM.	10/7/03	L. WENGSTROM	J.K.	7/19/04	A	55335	BF 22-24B		
RELEASED TO CAD MULTI LIST			8/18/03							
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE	- CAD DRAWING -			SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
			MANUAL REVISIONS NOT PERMITTED			NONE	8/18/03	7/19/04	B	1 OF 1