


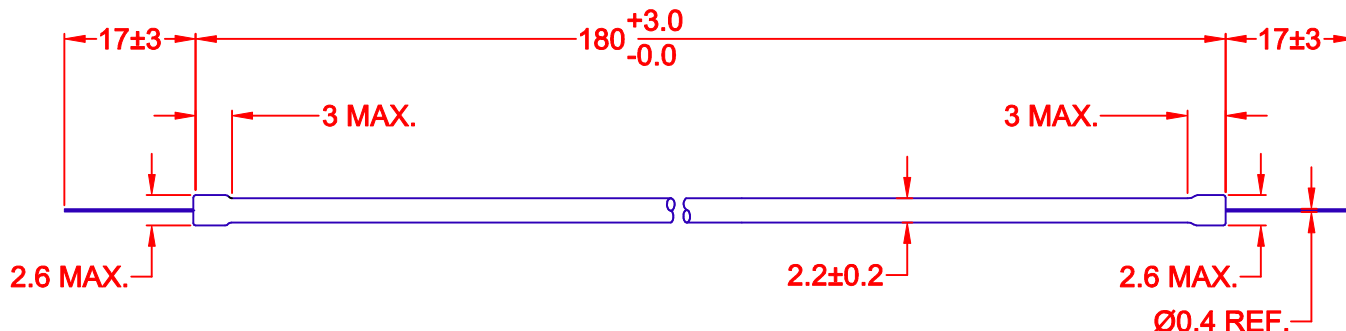

JKL PART NUMBER	COLOR RGB WHITE	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mA rms)	BRIGHTNESS (CANDELA/m ²)	*RATED LIFE (HRS)
BF22180-28B	x = .346 y = .319	1140 @ 0°C	380	5 ± 1	38,000 ±10%	20,000

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

			METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0 ANGLE +/- 0		JKL COMPONENTS CORPORATION TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP																					
			DRAWN BY		APPV'D BY		DATE		SIZE		FSCM NO.		DRAWING NO.		BF22180-28B													
A			CIRCUIT & LAMP VOLTAGE CHANGE		7/19/04		L. WENGSTROM		J.K.		7/19/04		A		55335													
			RELEASED & CANCEL P-0303-14		9/2/03																							
REV. NO.			DESCRIPTION/ECO NUMBER		APPV'D DATE		- CAD DRAWING -		MANUAL REVISIONS NOT PERMITTED		SCALE		NONE		RELEASED DATE		9/2/03		REVISION DATE		7/19/04		REV. NO.		A		SHEET 1 OF 1	