
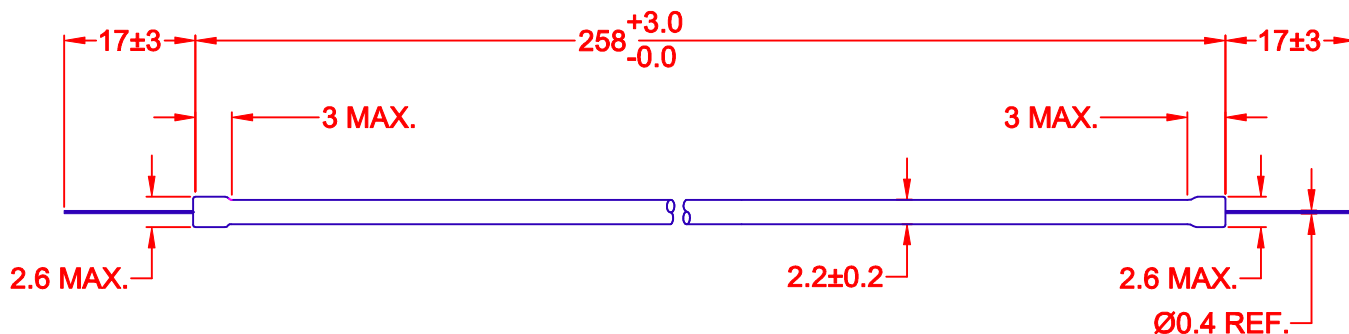


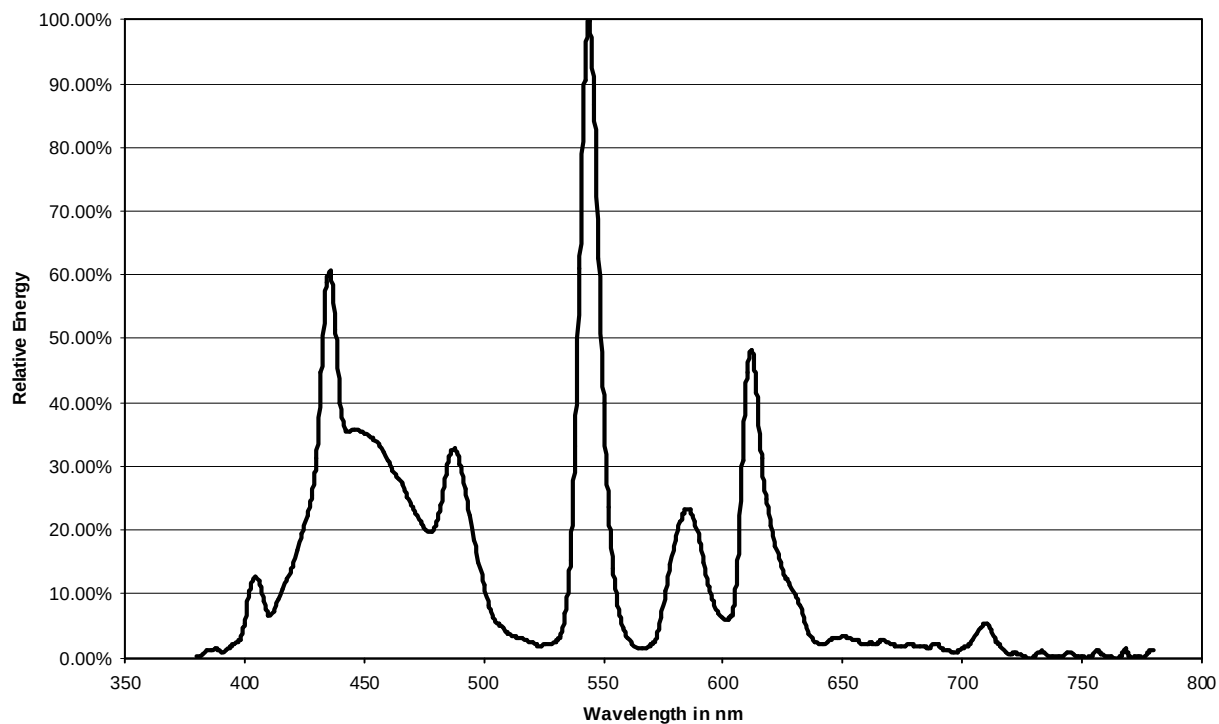

JKL PART NUMBER	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mAmps)	BRIGHTNESS (CANDELA/m ²)	*RATED LIFE (HRS)
BF22258-25B	LCD HIGH OUTPUT WHITE 9700°k RGB	1600 @ 0°C	535	5 ± 1	38,000 ±10%	20,000

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

			METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0 ANGLE +/- 0		JKL COMPONENTS CORPORATION TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP							
C	CHANGE ON CIRCUIT & LAMP VOLTAGE		7/19/04		DRAWN BY		APPV'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.			
B	CHANGE ON OUTPUT RGB		11/11/02		L. WENGSTROM		J.K.	7/19/04	A	55335	BF22258-25B			
A	NEW CHART		6/5/01											
RELEASED			6/4/01											
REV. NO.	DESCRIPTION/ECO NUMBER		APPV'D DATE		- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		SCALE		RELEASED DATE		REVISION DATE		REV. NO.	SHEET
							NONE		6/4/01		7/19/04		C	1 OF 1