
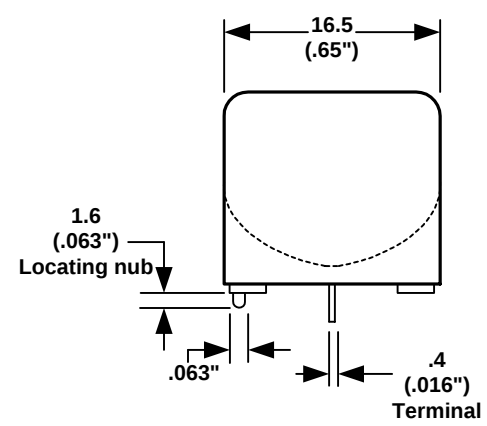
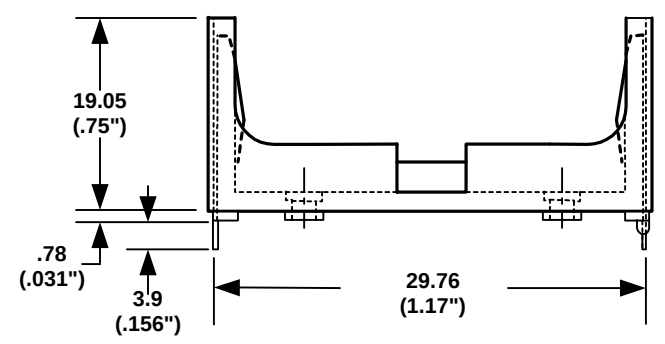
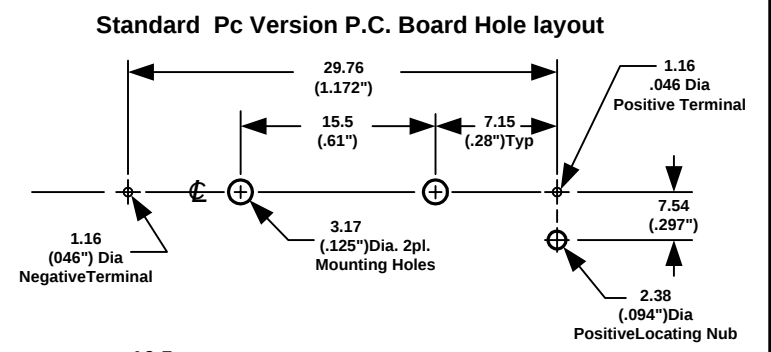


| DATE | SYM | REVISION RECORD | AUTH | DR. | CK. |
|------|-----|-----------------|------|-----|-----|
|      |     |                 |      |     |     |
|      |     |                 |      |     |     |
|      |     |                 |      |     |     |
|      |     |                 |      |     |     |
|      |     |                 |      |     |     |

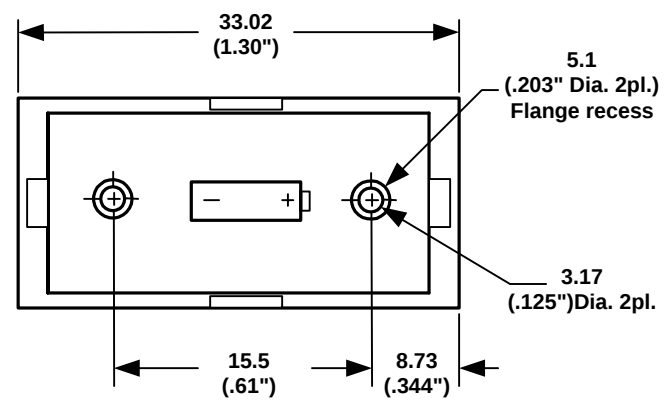

# SPECIFICATIONS

## Material:

Holder  
 Flammability Rating  
 Dielectric Strength  
 Temperature Range  
 Resistance to Solvent

Self extinguishing thermoplastic, PBT, black  
 UL94 V-O, File No. E88499 (M)  
 560 volts/ mil at 25°C for 5 sec.  
 -55°C to 180°C.  
 Xylene, Ethyl, Butyl, Methyl, Propyl alcohol,  
 Ethyl acetate, Refrigerants, Heptane & Toluene.  
 302 Spring Tempered Stainless Steel Nickel Plated  
 5.5 Grams

Contacts  
 Weight

## NOTE:

Eyelet Stimpson Style # A1883 .110"OD. x .190"flange  
 Flange recess .203" Dia. X .090" deep  
 Accepts standard 2-56 machine screws

## Accessories:

BI - UM - 3 - 4 Insulator,

**Note:** Dimensions in mm. ( inches )

|                                          |                                                                                                                                      |                                  |                              |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|------------------------------|
| TOLERANCES<br>(EXCEPT AS NOTED)          | <div> <div>MPD</div> <div>Memory Protection Devices, Inc.</div> <div>200 Broad Hollow Road, Farmingdale, New York 11735</div> </div> |                                  |                              |
|                                          | DECIMAL<br>+ .5 (.020)<br>- .5 (.020)                                                                                                | SCALE                            | DRAWN BY B.S.<br>APPROVED BY |
| FRACTIONAL<br>+ .8 (.030)<br>- .8 (.030) | TITLE<br><b>1/2 "AA" CELL BATTERY HOLDER</b>                                                                                         |                                  |                              |
| ANGULAR<br>+ 3°<br>- 3°                  | DATE<br><b>11/03/01</b>                                                                                                              | DRAWING NUMBER<br><b>BH1/2AA</b> |                              |