
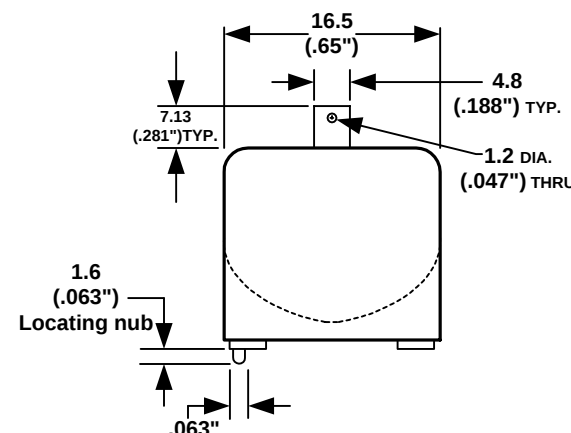
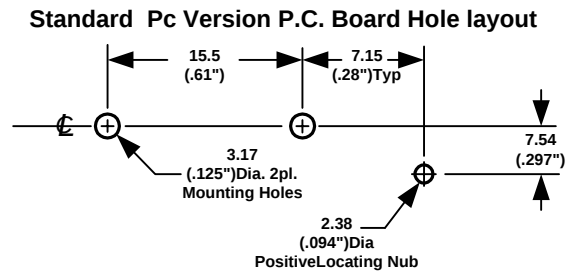


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

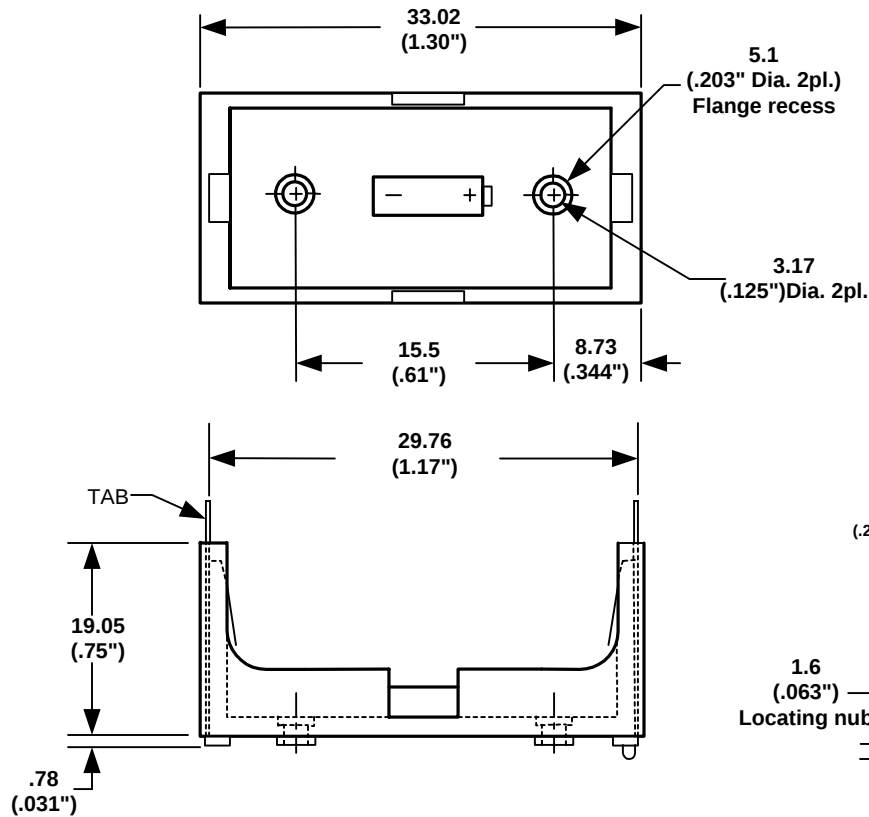

SPECIFICATIONS

Material:

Holder
Flammability Rating
Dielectric Strength
Temperature Range
Resistance to Solvent

Self extinguishing thermoplastic, PBT, black
UL94 V-O, File No. E88499 (M)
560 volts/ mil at 25° C for 5 sec.
-55°C to 180°C.
Xylene, Ethyl, Butyl, Methyl, Propyl alcohol,
Ethyl acetate, Refrigerants, Heptane & Toluene.
302 Spring Tempered Stainless Steel Nickel Plated
6 Grams

Contacts
Weight

NOTE:

Eyelet Stimpson Style # A1883 .110"OD. x .190"flange
Flange recess .203" Dia. X .090" deep
Accepts standard 2-56 machine screws
.188 Tab accepts AMP Faston #640917-1 or Equal

Accessories:

BI - UM - 3 - 4 Insulator,

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
	DECIMAL + .5 (.020) - .5 (.020)	SCALE	DRAWN BY B.S.
FRACTIONAL + .8 (.030) - .8 (.030)	TITLE 1/2 "AA" CELL BATTERY HOLDER		
ANGULAR + 3° - 3°	DATE 11/03/01	DRAWING NUMBER BH1/2AAT	