

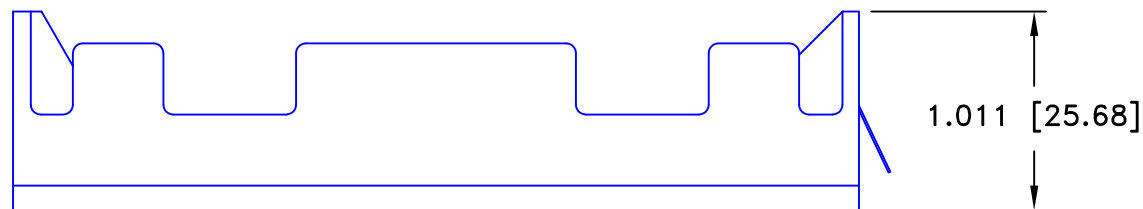


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/12/05	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/18/06	B	UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/06/06	C	ADDED CONTACT RESI. INFO.	T.B.	B.S.	
3/07/08	D	DIM. 2.550 WAS 2.500 DIM. 1.105 WAS 1.143.	T.B.	B.S.	

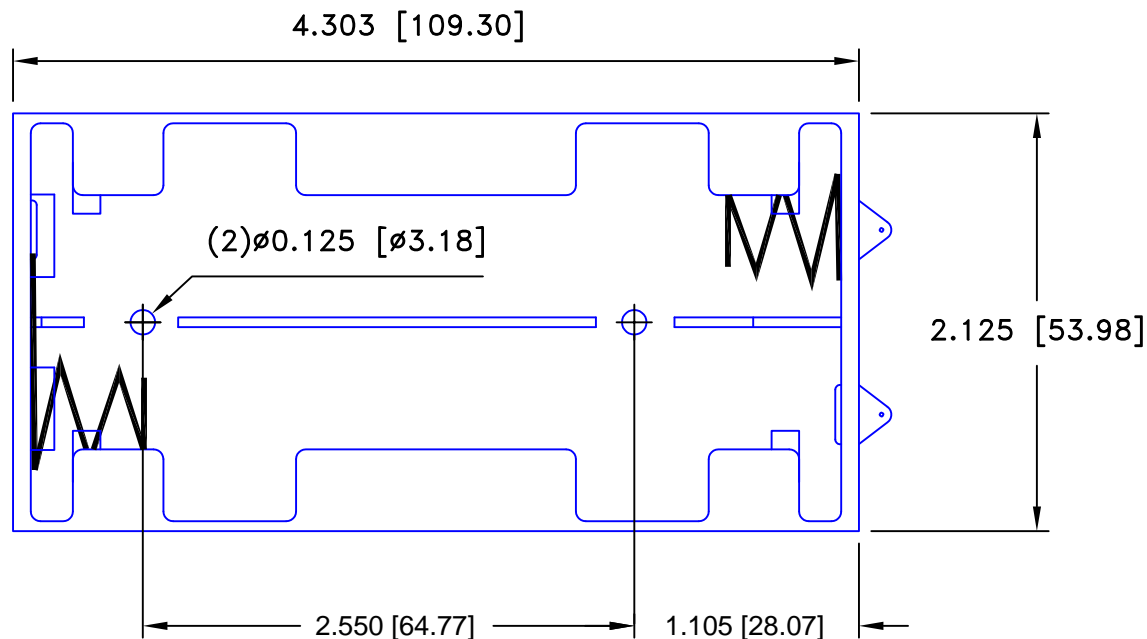

Solder Lugs shown

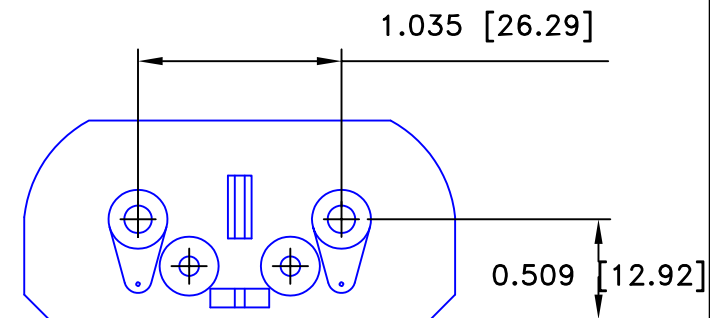


ORDERING CODE BH24C

SPECIFICATIONS

Plastic material - Polypropylene
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA
 Rivets - Brass, Nickel Plated
 9Volt Snaps - Brass, Nickel Plated
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/-
 CONTACTS PER EIA-540J000
 ROHS COMPLIANT

L- Solder Lugs
 W-(6") Wire Leads
 SF-9Volt type snaps
 B- Bump plates

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale 1=1	Drawn By T.S.
Fractional ± .8 (.030)		Approved By T.B.	
Angular ± 3°	Title FOUR "C" CELL HOLDER	Date 3/07/08	Drawing Number BH24CL