

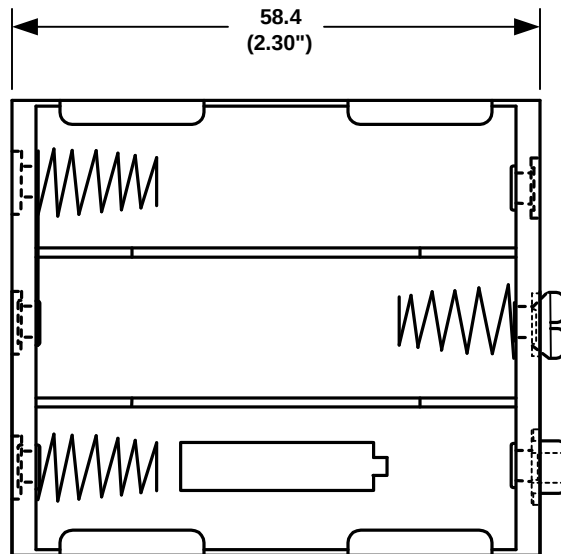


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
10/29/05	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/18/06	B	UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/06/06	C	ADDED CONTACT RESI. INFO.	T.B.	B.S.	

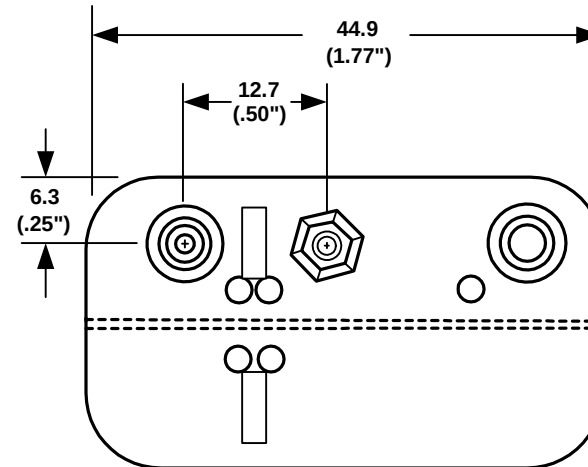

ORDERING CODE BH26AA ☐

SOLDER LUGS = L
(6") WIRE LEADS = W
9 VOLT TYPE SNAPS =SF

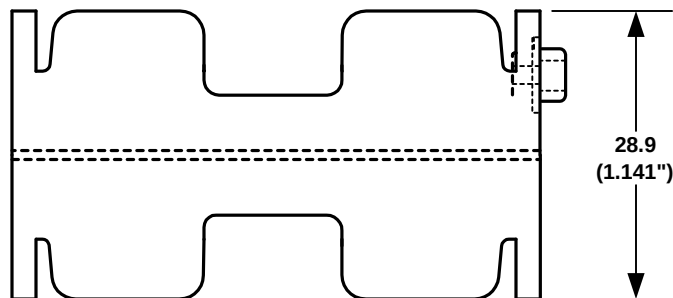

SOLDER LUGS SHOWN ABOVE

SPECIFICATIONS :

Plastic material - polypropylene

Flammability rating-UL94 HB, UL file no. E216959

Temperature Range: -10°C to +100°C

Springs - nickel plated spring steel Wire - 152.4 mm Ref.Long 26 AWG, UL1007, CSA - TR-64, 300V, 80° C.

Rivets - Brass, nickel plated

9 Volts Snaps - Brass, nickel plated

Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000

ROHS COMPLIANT

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL + .5 (.020") - .5 (.020")	TITLE SIX "AA" CELL HOLDER	SCALE NONE	DRAWN BY B.S.
FRACTIONAL + .8 (.030") - .8 (.030")		APPROVED BY	
ANGULAR + 3° - 3°	DATE 5/06/2006	DRAWING NUMBER BH26AASF	