


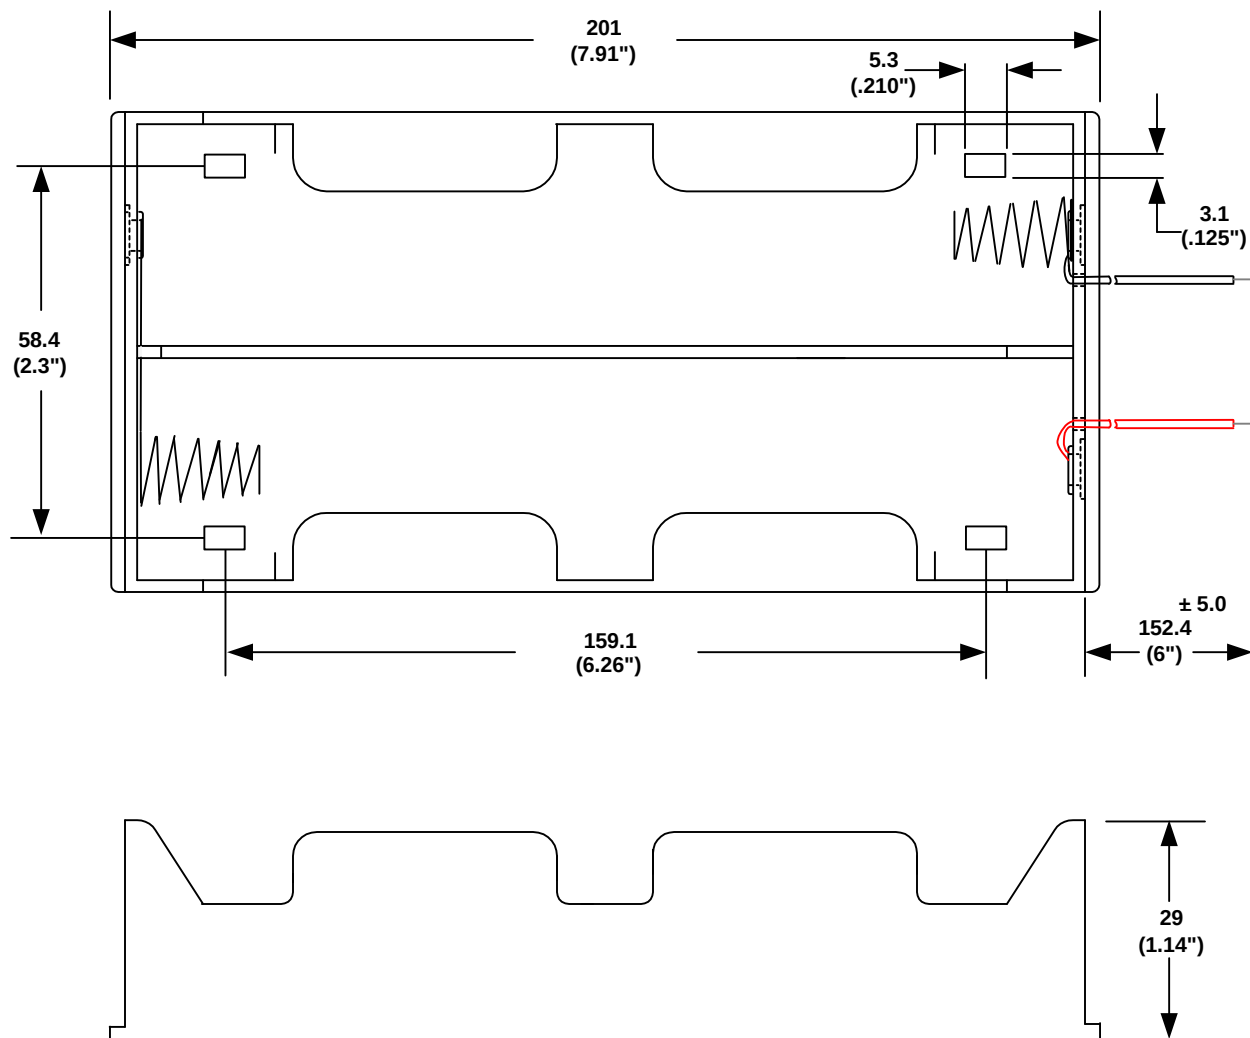


(6") WIRE LEADS SHOWN ABOVE

DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
4/22/06	A	ADDED "ROHS COMPLIANT" UPDATED MATERIAL NOTE	T.B.	B.S.	

ORDERING CODE BH26D

SOLDER LUGS = L
(6") WIRE LEADS = W
9VOLT TYPE SNAPS = SF

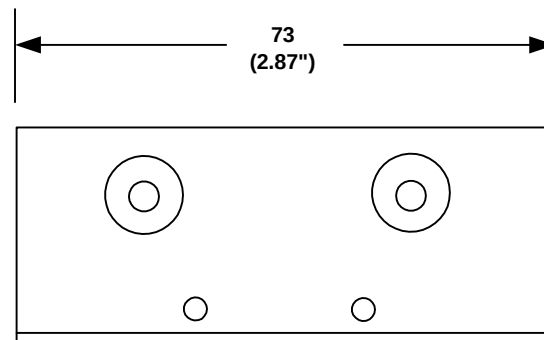

SPECIFICATIONS:

Plastic material - polypropylene, PP-1040
Flammability rating-UL94 HB, UL file no. E216959
Temperature Range: -10°C to +100°C
Springs - nickel plated spring steel Wire - 152.4 mm Long 26 AWG,
UL1007, CSA - TR-64, 300V, 80°C.
Rivets - Brass, nickel plated
9 Volts Snaps - Brass, nickel plated
Contact resistance: Under 50m Ω for +/- contacts per EIA-540J000
ROHS COMPLAINT

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL			
+ .5 (.020")		SCALE	DRAWN BY S.C.
- .5 (.020")		-----	APPROVED BY
FRACTIONAL	TITLE	SIX "D" CELL HOLDER	
+ .8 (.030")			
- .8 (.030")			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	4/22/2006	BH26DW	
- 3°			