

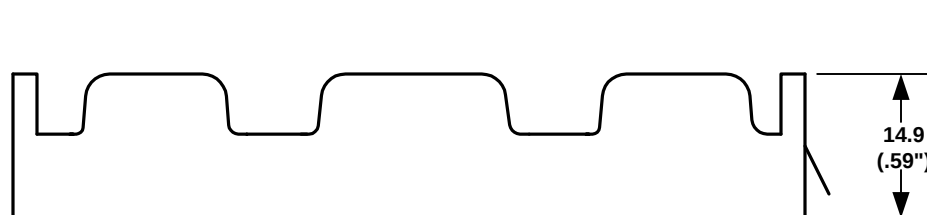


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

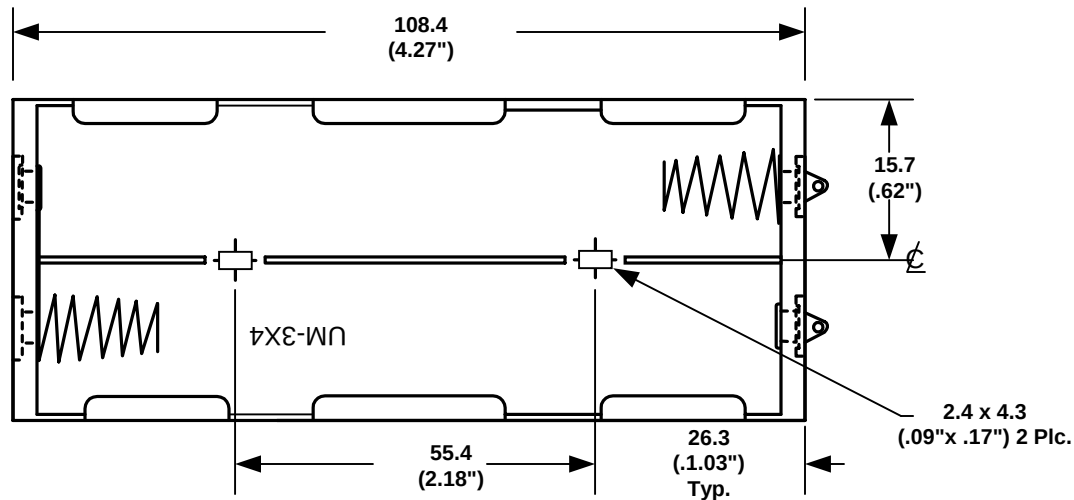

SOLDER LUGS SHOWN ABOVE

ORDERING CODE BH34AA ☐

SPECIFICATIONS :

Plastic material - polypropylene
Springs - nickel plated spring steel
Wire - 152.4 mm Ref. Long 26 AWG,
UL1007, CSA - TR-64, 300V, 80°C.
Rivets - Brass, nickel plated
9 Volts Snaps - Brass, nickel plated

SOLDER LUGS = L
(6") WIRE LEADS = W
9 VOLT TYPE SNAPS =SF

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL + .5 (.020") - .5 (.020")	TITLE FOUR "AA" CELL HOLDER	SCALE NONE	DRAWN BY S.C.
FRACTIONAL + .8 (.030") - .8 (.030")		APPROVED BY	
ANGULAR + 3° - 3°	DATE 01/29/2001	DRAWING NUMBER BH34AAL	