
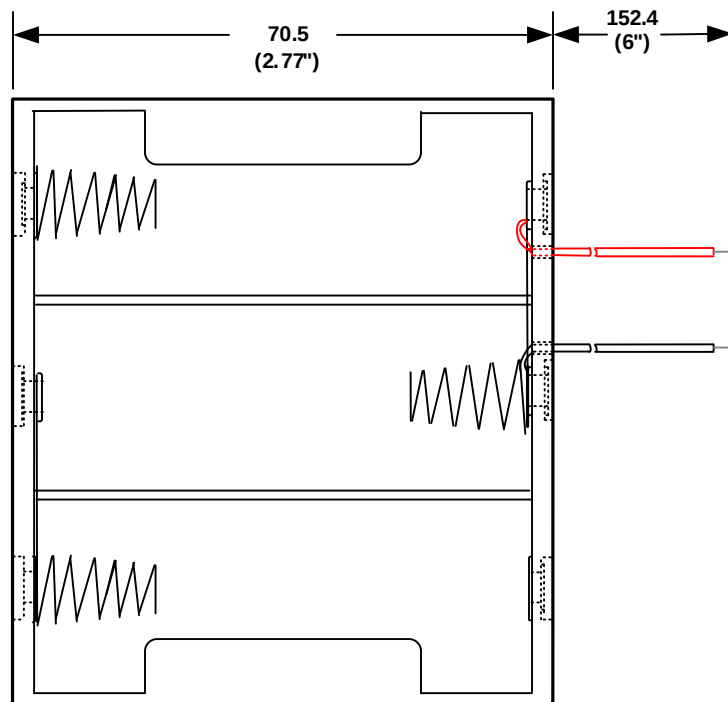


(6") WIRE LEADS SHOWN ABOVE

DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
7/14/07	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

ORDERING CODE BH36D

SOLDER LUGS = L
 (6") WIRE LEADS = W
 9VOLT TYPE SNAPS = SF
 BUMP PLATES = B

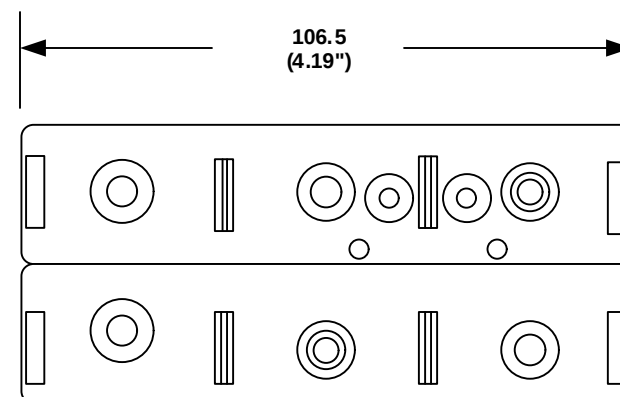

SPECIFICATIONS:

Plastic material - Polypropylene, Black
 Flammability rating-UL94 HB, UL file no. E216959
 Temperature Range: -10°C to +100°C
 Springs - nickel plated spring steel
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated
 Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLIANT

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL + .5 (.020") - .5 (.020")	SCALE	DRAWN BY S.C.	APPROVED BY
FRACTIONAL + .8 (.030") - .8 (.030")	TITLE SIX "D" CELL HOLDER		
ANGULAR + 3° - 3°	DATE 7/14/2007	DRAWING NUMBER BH36DW	