


### PCB LAYOUT


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/03/03	A	ALL DIM. CHANGED TO 3 DECIMAL POINT CONTACTS MTL. CHANGED TO PHOSPHOR BRONZE	T.B.	B.S.	
03/26/05	B	4.39 [0.173] WAS 4.34 [0.171]	T.B.	B.S.	
1/07/06	C	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
2/25/06	D	LEAD FREE WAS Sn-Pb PLTD.	T.B.	B.S.	

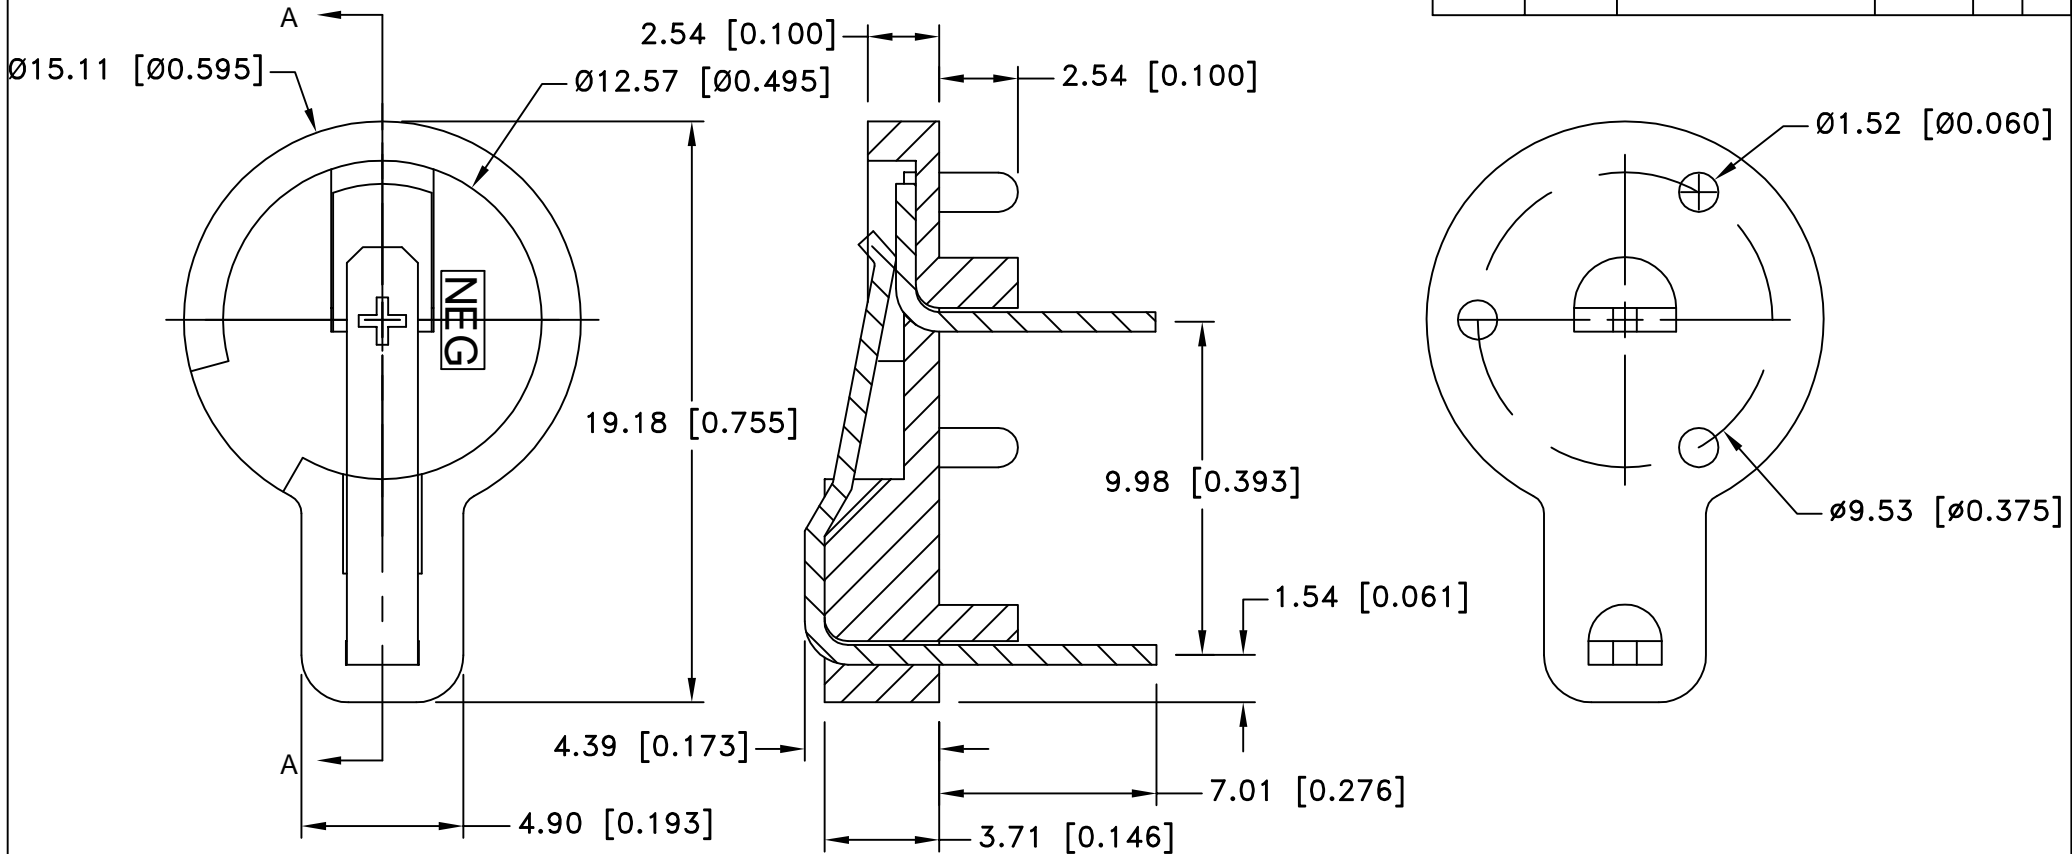

### NOTES:

#### MATERIAL:

HOLDER: PBT POLYESTER, BLACK, UL94V-0  
 POS. CONT.: PHOSPHOR BRONZE, SPRING TEMPER, NICKEL  
 PLTD., LEAD FREE SOLDER TAILS  
 NEG. CONT.: PHOSPHOR BRONZE, SPRING TEMPER, NICKEL  
 PLTD., LEAD FREE SOLDER TAILS  
 ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Title	Scale	Drawn By B.S.
Fractional ± .8 (.030)		Approved By T.B.	
Angular ± 3°	Date 2/25/06	Drawing Number BH501	