

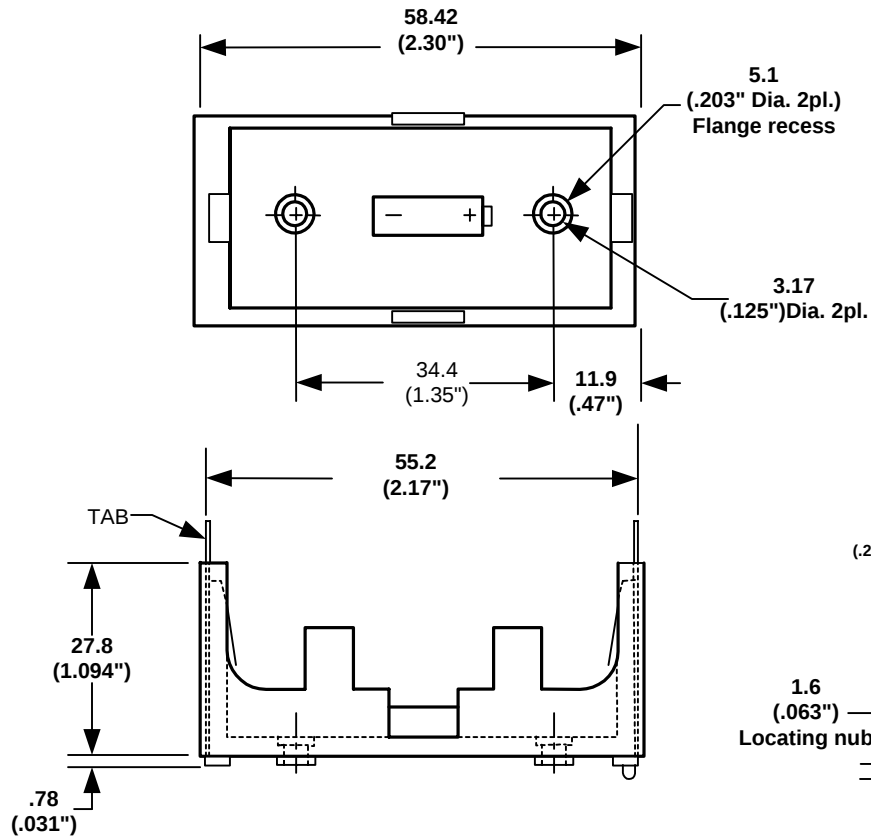


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

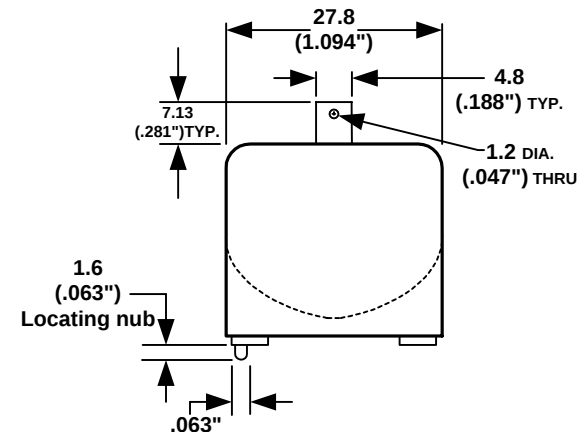

Standard Pc Version P.C. Board Hole layout

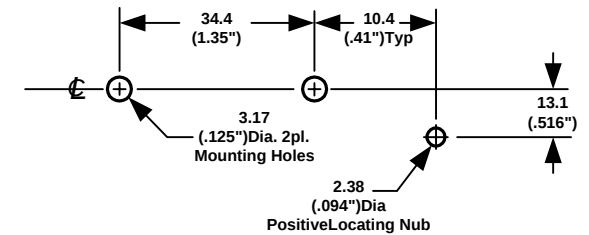

SPECIFICATIONS

Material:

Holder
Flammability Rating
Dielectric Strength
Temperature Range
Resistance to Solvent

Self extinguishing thermoplastic, PBT, black
UL94 V-O, File No. E41797
560 volts/ mil at 25 °C for 5 sec.
-55 °C to 140 °C.
Xylene, Ethyl, Butyl, Methyl, Propyl alcohol,
Ethyl acetate, Refrigerants, Heptane & Toluene.
302 Spring Tempered Stainless Steel Nickel Plated
20.7 Grams

Contacts
Weight

NOTE:

Eyelet Stimpson Style # A1883 .110"OD. x .190"flange
Flange recess .203" Dia. X .090" deep
Accepts standard 2-56 machine screws
.188 Tab accepts AMP Faston #640917-1 or Equal

Accessories:

BI - UM - 1 - 2 Insulator,
BHC - POLZ - KEY Polarized Key

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL + .5 (.020) - .5 (.020)	SCALE	DRAWN BY S.C.
FRACTIONAL + .8 (.030) - .8 (.030)	APPROVED BY	
ANGULAR + 3° - 3°	DATE 11/09/02	DRAWING NUMBER BHCT

"C" CELL BATTERY HOLDER