
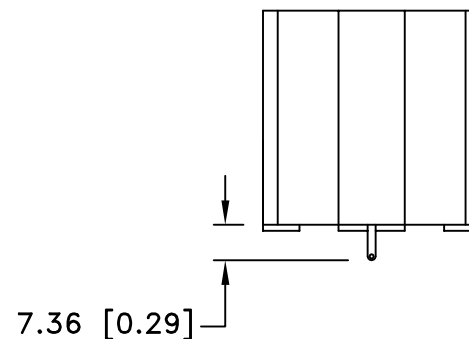
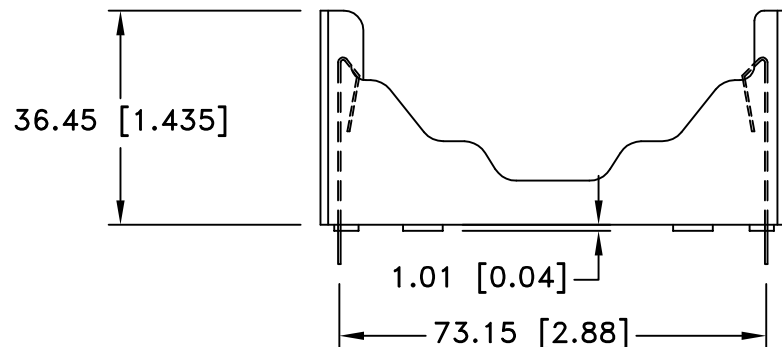
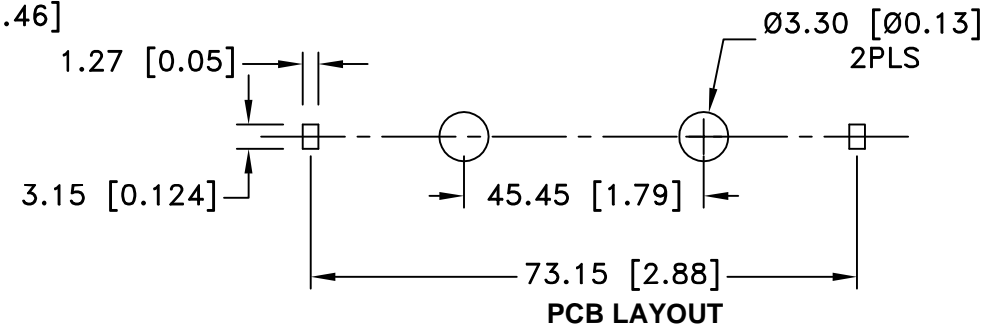



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

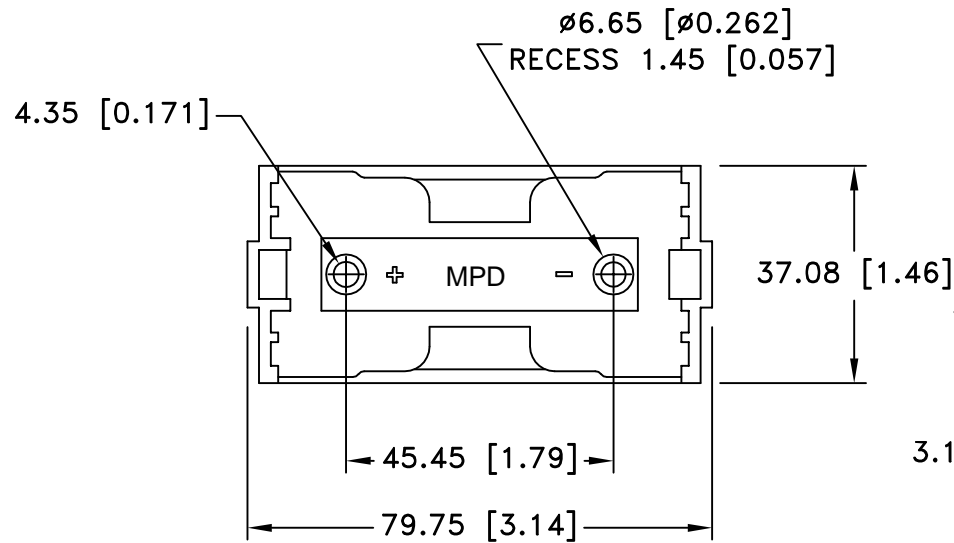

NOTES:

MATERIAL:

Holder: PBT, 30% Glass, Black, UL94V-0
 Contacts: 302 Stn. Stl., Spring temper, Nickel Plated Overall
 Vibration Test: 10-50-10 Hz swept in 60 seconds
 X,Y,Z direction: 1 hour each direction, No dislodgement of the cell or damage, No discontinuity over 10 micro-seconds
 Shock Test: Half sine wave acceleration 150g. 6 micro-seconds, 1 shock pulses each direction per axis, total of 6 pulses,
 No evidence of physical damage
 ROHS COMPLIANT

Tolerance (Except as noted)		Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.	
			Approved By T.B.	
Fractional ± .8 (.030)	Title D HOLDER			
Angular ± 3°	Date 1/13/07	Drawing Number BHD-2		