

Description


- For 1/4" x 7/8" to 1/4" x 1-1/4" fuses
- Accepts #16 to #12 AWG copper wire
- Simple crimp assembly
- "Snap-Lock" feature provides strong positive union
- High visibility yellow color
- Recommended crimp tools:
 - Thomas & Betts – ERG-2002
 - Channelock No. 909
 - General Electric – U.S. & Metric Electrical Terminal Tool
- UL flammability rating 94 V2

Environmental Data

- Pull Force: 5 pounds minimum to separate fuseholder housing with fuse inside


Ordering

- Specify packaging, product, and option code

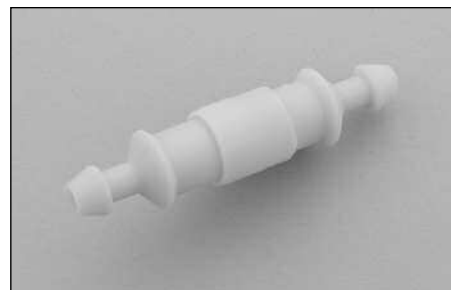

Dimensions

Drawing Not to Scale

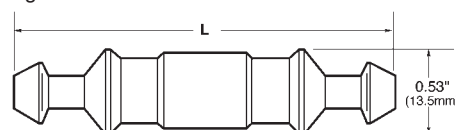

Fuse Length	"L" with fuse installed
7/8"	2.100 Max.
1"	2.250 Max.
1-1/4"	2.420 Max.

SPECIFICATIONS		
Product Code	Voltage Rating AC	Current Rating AC
HHB	32V	30A

Component	Material
Body	Nylon
Crimp	Copper Tin-Plated

PACKAGING CODE	
Packaging Code	Description
Blank	10 pieces of fuseholders packed into a carton
BK	1,000 pieces of fuseholders packed into a cardboard shelf package

OPTION CODE	
Option Code	Description
Y408	#14 AWG insulated wire with 8 inch yellow leads
R408	#14 AWG insulated wire with 8 inch red leads
B408	#14 AWG insulated wire with 8 inch black leads
Y419	#14 AWG insulated wire with 19 inch yellow leads
R419	#14 AWG insulated wire with 19 inch red leads
B419	#14 AWG insulated wire with 19 inch black leads
-R	RoHS Compliant version

North America

Cooper Electronic Technologies
1225 Broken Sound Parkway NW
Suite F
Boca Raton, FL 33487-3533
Tel: 1-561-998-4100
Fax: 1-561-241-6640
Toll Free: 1-888-414-2645

Cooper Bussmann
P.O. Box 14460
St. Louis, MO 63178-4460
Tel: 1-636-394-2877
Fax: 1-800-544-2570

Europe

Cooper Electronic Technologies
Cooper (UK) Limited
Burton-on-the-Wolds
Leicestershire • LE12 5TH UK
Tel: +44 (0) 1509 882 737
Fax: +44 (0) 1509 882 786

Cooper Electronic Technologies
Avda. Santa Eulalia, 290
08223
Terrassa, (Barcelona), Spain
Tel: +34 937 362 812
+34 937 362 813
Fax: +34 937 362 719

Asia Pacific

Cooper Electronic Technologies
1 Jalan Kilang Timor
#06-01 Pacific Tech Centre
Singapore 159303
Tel: +65 278 6151
Fax: +65 270 4160