



MATERIAL
 BODY: FR-NYLON WITH 33% GLASS FILLED, UL FILE NO. E4179(M)
 FLAMMABILITY RATING: UL94V-0
 CONTACT: PHOSPHOR BRONZE

FINISH
 CONTACT: TIN PLATED OVER NICKEL

SPECIFICATIONS
 APPLICATION FOR 3V LITHIUM BATTERY
 INSULATOR RESISTANCE: $5000\text{ M}\Omega\text{ MIN.}$
 OPERATION TEMPERATURE: $-55^{\circ}\text{C TO } +105^{\circ}\text{C}$
 DURABILITY: 50 CYCLES MIN
 CONTACT RESISTANCE: $30\text{ M}\Omega\text{ MAX}$
 ROHS COMPLIANT

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
9/28/07	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

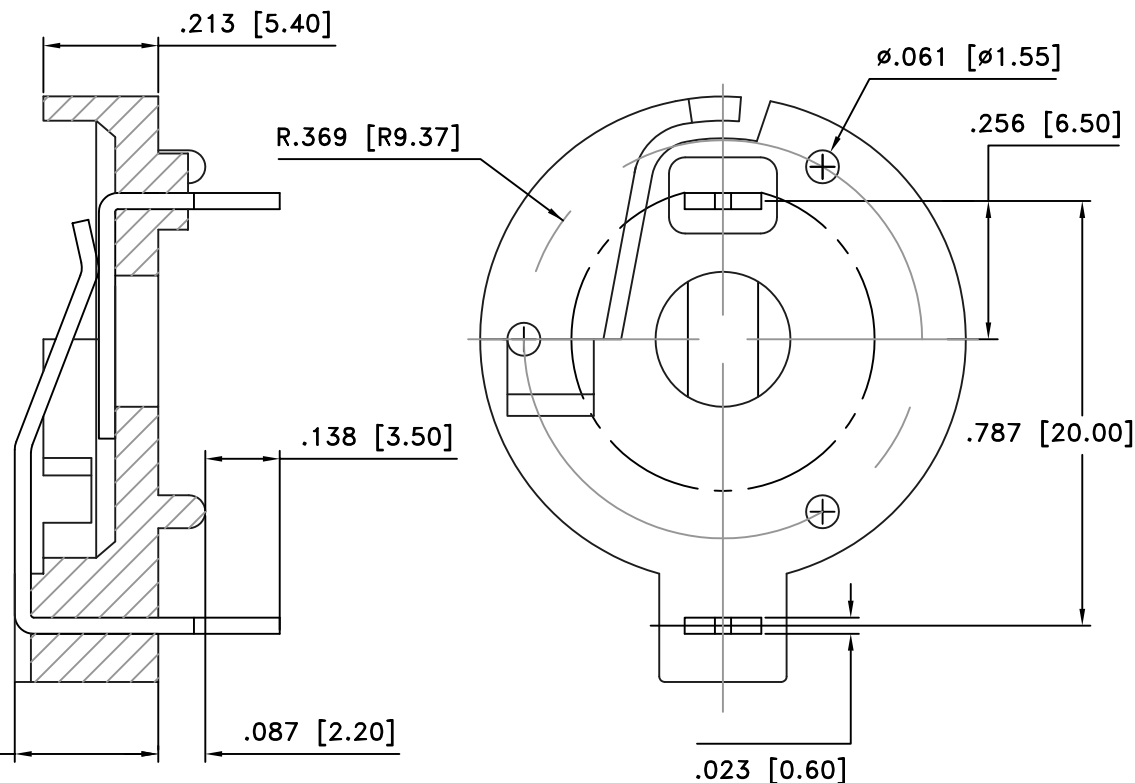

Tolerance (Except as noted)	 Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735			
decimal $\pm .5$ (.020)			Scale 4=1	Drawn By B.S.
Fractional $\pm .8$ (.030)	Title BR/CR 2032 COIN BATTERY HOLDER W/RETAINER ARM			
Angular $\pm 3^{\circ}$	Date 9/28/07	Drawing Number BS-3		