



PANDUIT PART NUMBER	WIRE SIZE	DIMENSIONS in.			
		±.03 A	±.01 B DIA.	±.003 C	±.01 D DIA.
BS22	26-22	.47 (11.9)	.08 (2.0)	.02 (0.5)	.04 (1.0)

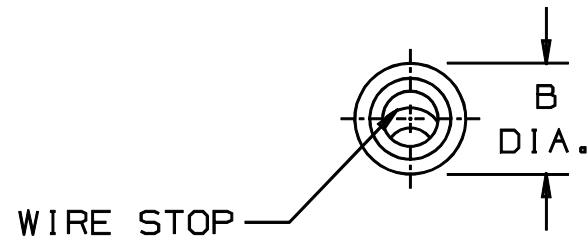

1. UL LISTED AND CSA CERTIFIED FOR:
 - A. #26-22 AWG SOLID OR STRANDED
COPPER WIRE
 - B. 302° F (150° C) MAX. TEMP. RATING
2. MATERIAL:
 - A. .02 (0.5) THK COPPER,
TIN PLATED
3. PACKAGE QTY: STD. PKG.-C=100
BULK PKG.-M=1000
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOLS:
CT-100 POCKET B
6. WIRE STRIP LENGTH: 9/32 ^{+1/32}₋₀ (7.1 ⁺⁸₋₀)

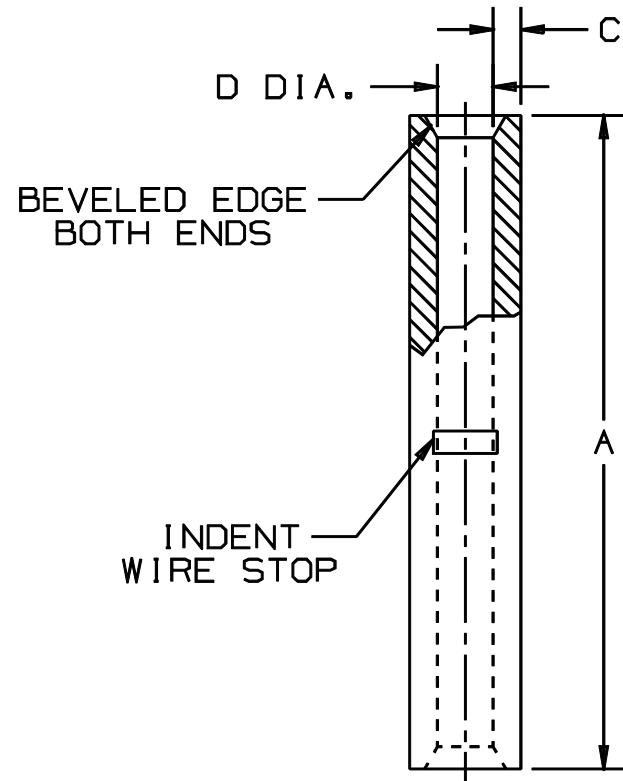

										PANDUIT CORP. TINLEY PARK, ILLINOIS			
03	1/01	RM		FILESPEC WAS N41336_PCD_02						#26-22 BARREL NON-INSULATED BUTT SPLICE			
02	12/94	TH		UPDATED NOTES AND DIMENSIONS	02709								
1	9-88	DW		REDRAWN WITH REVISIONS									
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY	CHK'D	SCALE	DRAWING NO.		
								DAW		NONE	A41336		