
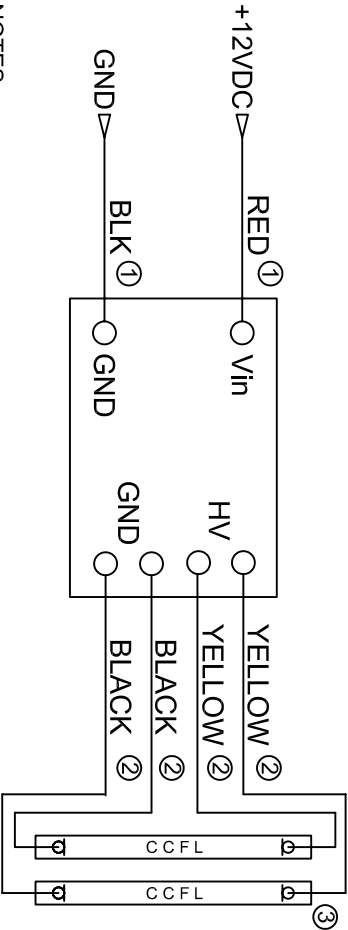
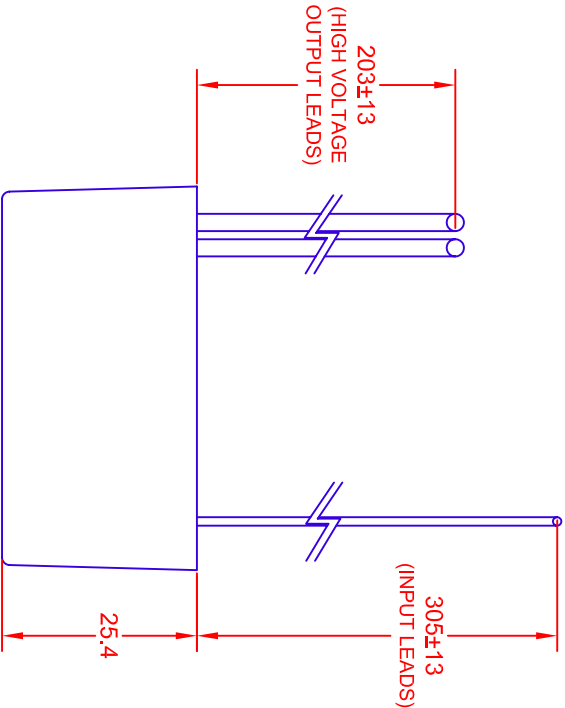
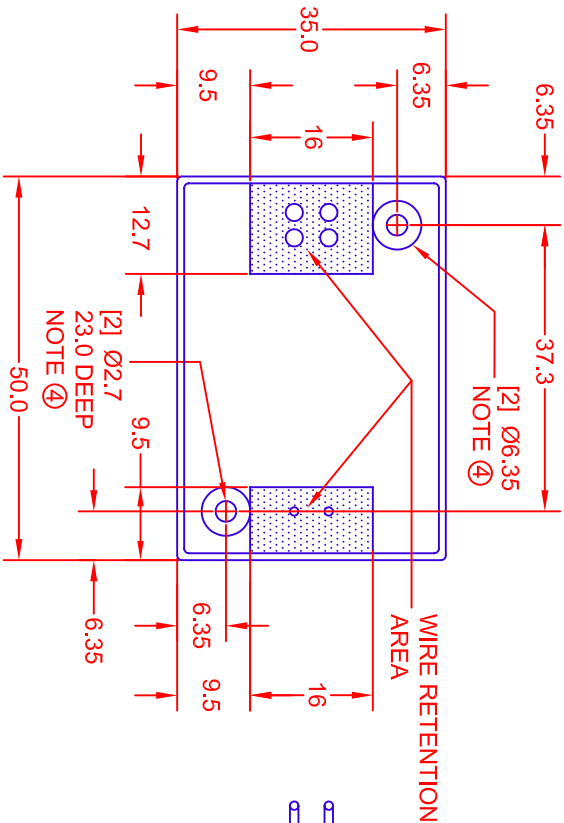


REV.	DESCRIPTION/ECO NO.	DATE
A	PROD. RELEASED	11/4/98
B	WIRE DESIGN PLACEMENT CORRECT.	12/9/03
C	ADD LOCATION OF WIRES IN COMPOUND & NOTES	7/12/07

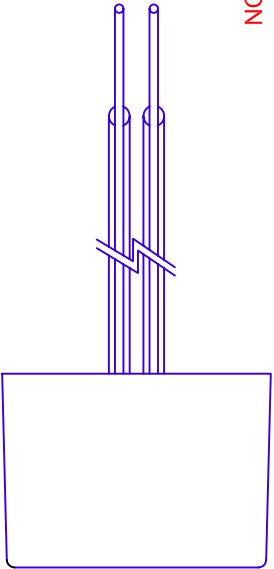

NOTES:

- REVERSE POLARITY TO INVERTER INPUT WILL CAUSE AN OPEN CIRCUIT IN INTERNAL FUSE.
- WIRE SIZE 22 AWG, SOFT FLEXIBLE PVC INDULATION NOMINAL O.D. 2.3mm TEMPERATURE RANGE -80 TO +105 C.
- REFERENCE DRAWING BXA-12529 FOR SINGLE LAMP OPERATION.
- USE 6-32-0.75 INCH LONG TYPE F SCREWS IN LOCATIONS.

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	10.0	12.0	13.2
INPUT CURRENT: (mA)	200	260	500
OUTPUT VOLTAGE: (Vrms)	950	1000	1050
OUTPUT CURRENT 2 X (mA)	4.5	5.5	6.5
OUTPUT FREQUENCY: (kHz)	25	35	45
OPERATING TEMP: (CELSIUS)	0	25	50

METRIC	DIMENSIONS ARE IN MILLIMETERS		TITLE	
	TOLERANCE UNLESS OTHERWISE SPECIFIED	1 PL +/- 0.5 2 PL +/- 0.3 ANGLE +/- 0	12 VDC INPUT, DUAL OUTPUT, ENCAPSULATED CCFL INVERTER	
THIRD ANGLE PROJECTION				
DRAWN BY L. WENGSTROM	APP'D BY	DATE	SIZE	FSCM NO.
			A	55335
				DRAWING NO.
				7/12/07
				SCALE
				NONE
				RELEASED
				11/4/98
				REVISION
				7/12/07
				REV.
				NO.
				C
				SHEET
				1 OF 1

JKL COMPONENTS CORPORATION