


CATALOG LISTING
BZE6-2RN2
PAGE 1 OF 1
REPLACES
ISSUE
13
CHECK
REVISIONS
A CO-73736
S A V 5 OCT 92
B CO-73655
S M 21 APR 93
C CO-77179A
K D R 17 FEB 94
D CO-81513E
J A K 25 FEB 97
E 0017057
V K R 23 NOV 05
DDM/CAD
DRAWN
SAV 5 OCT 92
BP 23 NOV 05

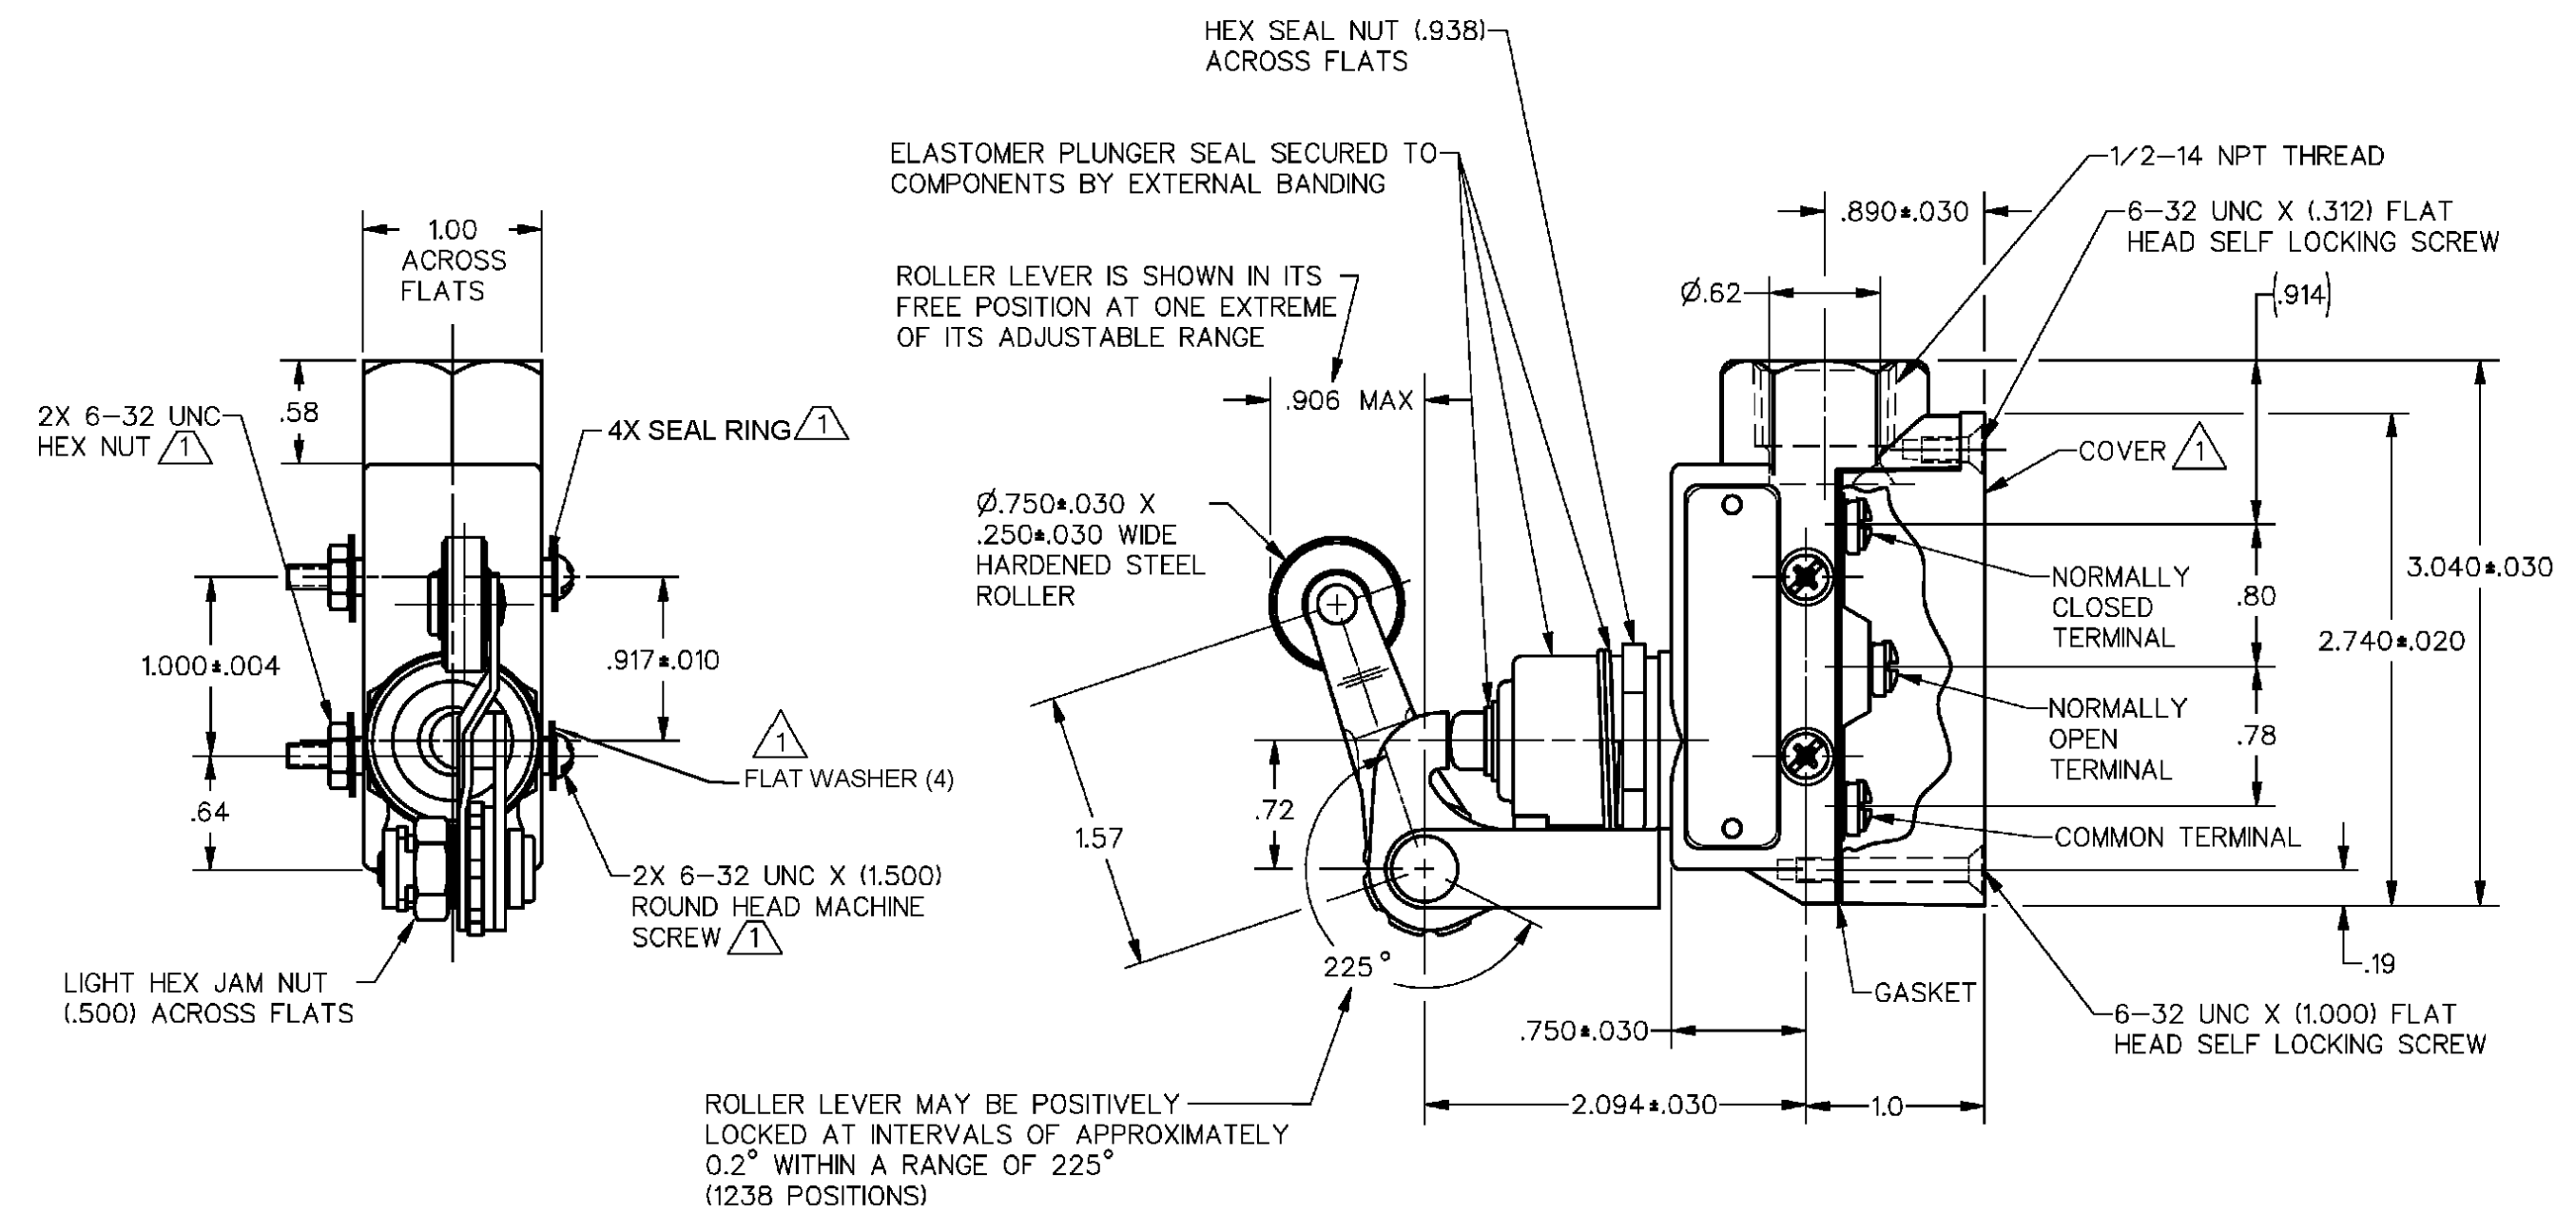

- NOTE
- 1 FURNISHED UNASSEMBLED
 - 2 — ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
 - 3 — 3X 6-32 UNC X (.219) BINDING HEAD TERMINAL SCREW AND CUPWASHER
 - 4 — SEAL RATING: NEMA 1,3 IP54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION
		SCALE FULL
		DO NOT SCALE PRINT
		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
CHARACTERISTICS	ELECTRICAL DATA	ONE PLACE (.01) ± .030
OPERATING FORCE — — — — — 10-20 OZ	CONTACT ARRANGEMENT S P D T	TWO PLACE (.00) ± .015
RELEASE FORCE — — — — — 6 OZ MIN		THREE PLACE (.000) ± .005
PRETRAVEL — — — — — .188 MAX	L74 15A 125, 250 OR 480 VAC 2A 600 VAC 1/8HP 125 VAC, 1/4HP 250 VAC 1/2A 125 VDC, 1/4A 250 VDC	ANGLES ±
DIFFERENTIAL TRAVEL — — — — .006 MAX		WEIGHT .71 LB
OVERTRAVEL — — — — — .219 MIN		
BASIC SWITCH REPLACEMENT — — — BZ-2RN702		
CE 1.5A, 240 Vac		