


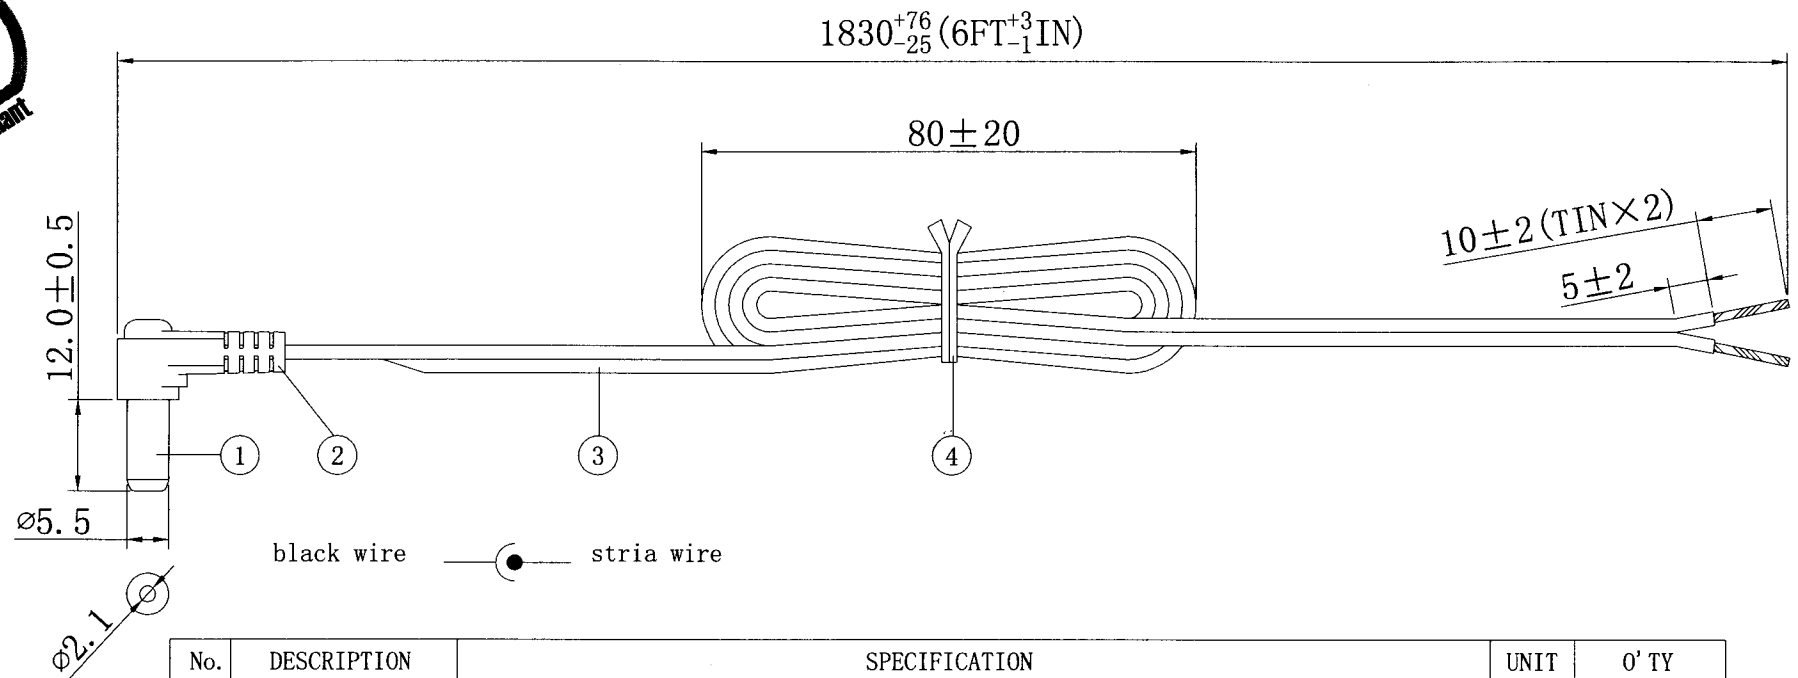

No.	DESCRIPTION	SPECIFICATION	UNIT	Q'TY
1	PLUG	φ2.1x5.5x18±0.5mm black color hardware.	EA	1
2	PLUG HOLDER	used 30P black color PVC. M135	EA	1
3	CABLE	UL2468 AWG#24 0.16 by 11 rootlets, black color twin wire, O.D. 1.8 by 3.6 ±0.1mm.	MM	1840 ⁺²⁰ ₋₀
4	BAND WIRE	black enfold gluey wire.	MM	89±3

FUNCTION TEST: No open, no reversed polarity, no short-circuit, no INT

HI-POT TEST: 600VAC, 0.5mA, 1Second.

CABLE ASSEMBLY SHALL BE IN COMPLIANCE WITH RoHS REQUIREMENT.

Tolerance: 0.0 ± 0.2 0.00 ± 0.1 0.000 ± 0.05		R/A P5 to S/T Ends, 6ft, 24AWG Zip Cord	
	Unit: mm	CA-2189	
	Scale: 1:1		