


915 ± 50 (3FT ± 2IN)

80 ± 20

9.5 ± 0.5

ø1.35
ø3.50

ø1.35
ø3.50

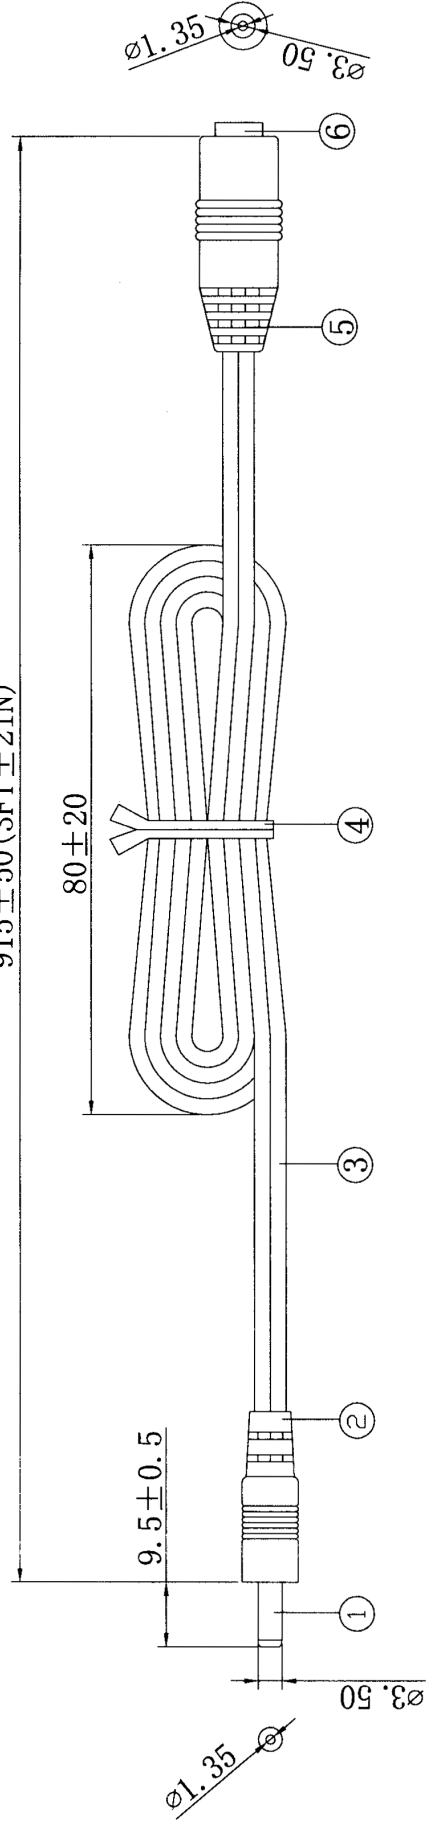

black wire —●— stria wire


black wire —●— stria wire

No.	DESCRIPTION	SPECIFICATION	UNIT	O' TY
1	PLUG	ø3.50x1.35x22 ± 0.5mm black color hardware Ni-plate.	EA	1
2	PLUG HOLDER	used 30P black color PVC.	EA	1
3	CABLE	UL2468 AWG#24 0.16 x 11 rootlets x 2C, black color twin wire, 0.D. 1.8 by 3.6 ± 0.1mm.	MM	920 ⁺¹⁰ ₋₀
4	BAND WIRE	black enfold gluey wire.	MM	89 ± 3
5	SOCKET	Used 30P black color PVC.	EA	1
6	PLUG HOLDER	ø3.50x1.35 socket Ni-plate	EA	1

FUNCTION TEST: No open, no reversed polarity, no short-circuit, no INT

HI-POT TEST: 600VAC, 0.5mA, 1Second.

CABLE ASSEMBLY SHALL BE IN COMPLIANCE WITH RoHS REQUIREMENT.



UNITS: mm
Tolerance:
X = ± 0.5
.X = ± 0.25
.XX = ± 0.05

Description:
Extension Cable, 3.5mm x 1.35mm DC
Jack to P7 Plug, 3ft, 18AWG Zip Cord

Part Number:

CA-2217



07-06-2006