


Specifications:

cable description	6 conductor (red, yellow, green, black, blue, white), 0.16x7, alu-minum foil shield (0.2x7)
receptacle overmold	black PVC
cable outer diameter	4.5
cable material	non UL 60P
cable color	black
cable gauge	AWG #26
cable length	1830
plug description	P/N 3682G guilded
twist tie	14 cm black
max voltage	300 V/S 0.5mA
max current	2 A

Notes: RoHS compliant

Mechanical drawing:

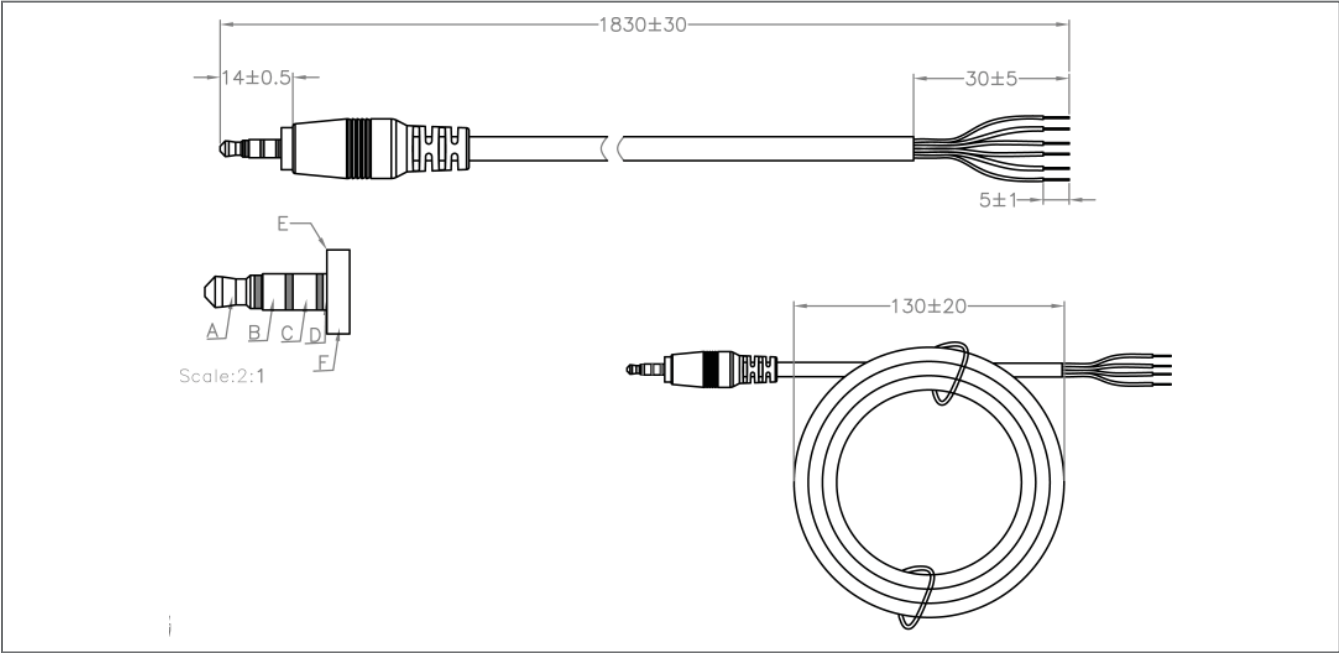

Wiring diagram:

A	Tip, Red Wire
B	1st Ring, Black Wire
C	2nd Ring, Yellow Wire
D	3rd Ring, White Wire
E	Inside Sleeve. Green Wire
F	Outside Sleeve. Blue Wire

tolerance .X: ± 0.5 mm .XX: ± 0.2 mm

Revision notes:

Rev	Date	Description
A	January 19, 2009	Re-issue. Original specification issued by CUI; re-issued by Tensility without any material or mechanical changes.

tolerance .X: ±0.5 mm .XX: ±0.2 mm