


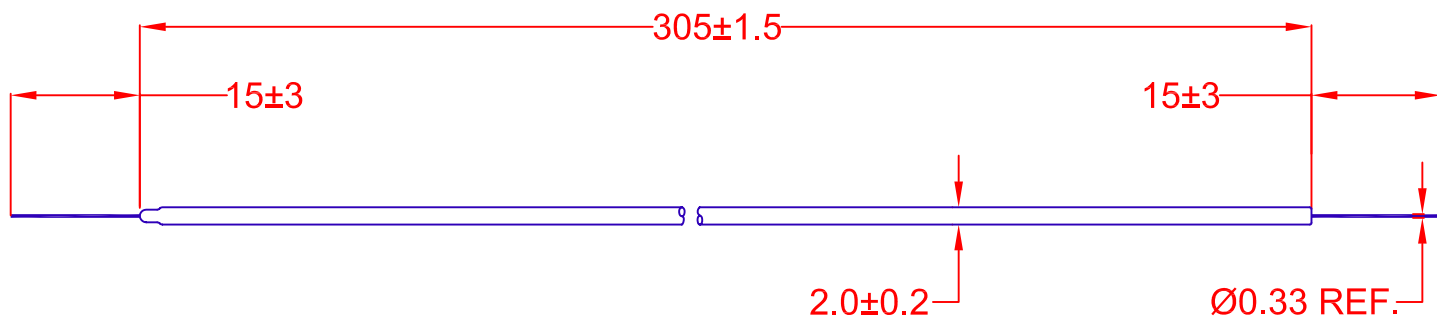

JKL LAMP PART NUMBER	COLOR LCD HIGH OUTPUT WHITE 9450°k RGB	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mA rms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS)
BF20305-24B	x = .285 y = .289	1013 @ 0°C	695	5 ± 1	28,000 ± 10%	20,000

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

			METRIC		DIMENSIONS ARE IN MILLIMETERS		JKL COMPONENTS CORPORATION											
					TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE											
			THIRD ANGLE PROJECTION		1 PL +/- 0.2 2 PL +/- 0 ANGLE +/- 0		MINIATURE COLD CATHODE FLUORESCENT LAMP											
			DRAWN BY L. WENGSTROM		APPV'D BY P.A.		DATE 12/5/05		SIZE A		FSCM NO. 55335		DRAWING NO. BF20305-24B					
RELEASED			12/5/05		- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED				SCALE NONE		RELEASED DATE 12/5/05		REVISION DATE		REV. NO.		SHEET 1 OF 1	
REV. NO.			DESCRIPTION/ECO NUMBER		APPV'D DATE													