




REV.	DESCRIPTION	DATE
A	NEW DRAWING	10/3/2007
B	lead wire material change	8/11/2008

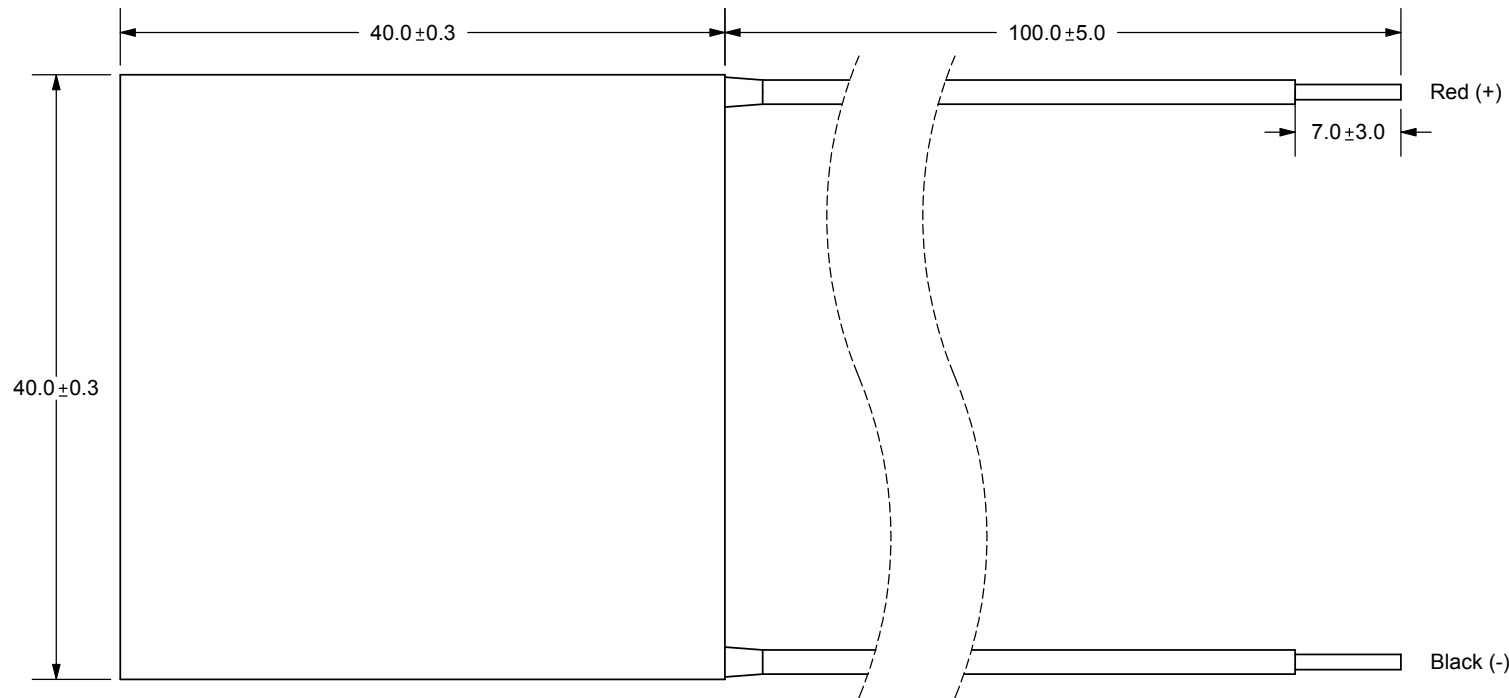

SCALE 1:1

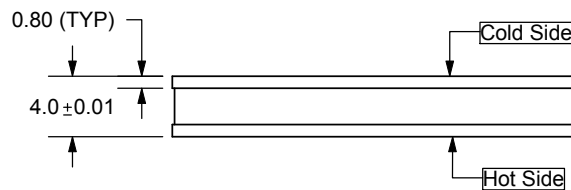

TOLERANCE:
±0.1mm UNLESS OTHERWISE
NOTED



Parameters		Remarks
Resistance	2.17 $\Omega \pm 10\%$	Note-1
I _{max}	6.0 A	Note-2
V _{max}	15.4 V	Note-3
	Th=27°C Th=50°C	
Q _{max}	53.0 W 59.3 W	Note-4
ΔT_{max}	68°C 75°C	Note-5
Solder melting point	138°C	Note-6
Maximum compress	98.07N/cm ² (10kgf/cm ²)	Note-7
MTBF rating	200,000 hours	

NOTES:

- Note-1: Measured by AC 4-terminal method at 25°C
Note-2: Maximum current at ΔT_{max}
Note-3: Maximum voltage at ΔT_{max}
Note-4: Maximum cooling capacity at I_{max}, V_{max}, and $\Delta T=0^\circ\text{C}$
Note-5: Maximum temperature difference at I_{max}, V_{max}, Q=0W
(maximum parameters are measured in a vacuum)
Note-6: Thermoelectric module's solder melting point
Note-7: Recommended maximum compression

	MATERIAL	PLATING
CERAMIC PLATE	Al ₂ O ₃ (Alumina)	White Color
SEALER	Silicon Rubber RTV	White Color
LEAD WIRE	UL1674	Tin
JOINT COVER	Silicon Rubber RTV	White Color



CUI INC


20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

TITLE: PELTIER MODULE		REV: B
PART NO. CP60440	UNITS: MM [INCHES]	
DRAWN BY: ZRJ	APPROVED BY:	SCALE: 2:1

PC FILE NAME:
CP60440

COPYRIGHT 2007 BY CUI INC.

CP60440 ($T_h = 27^\circ\text{C}$)

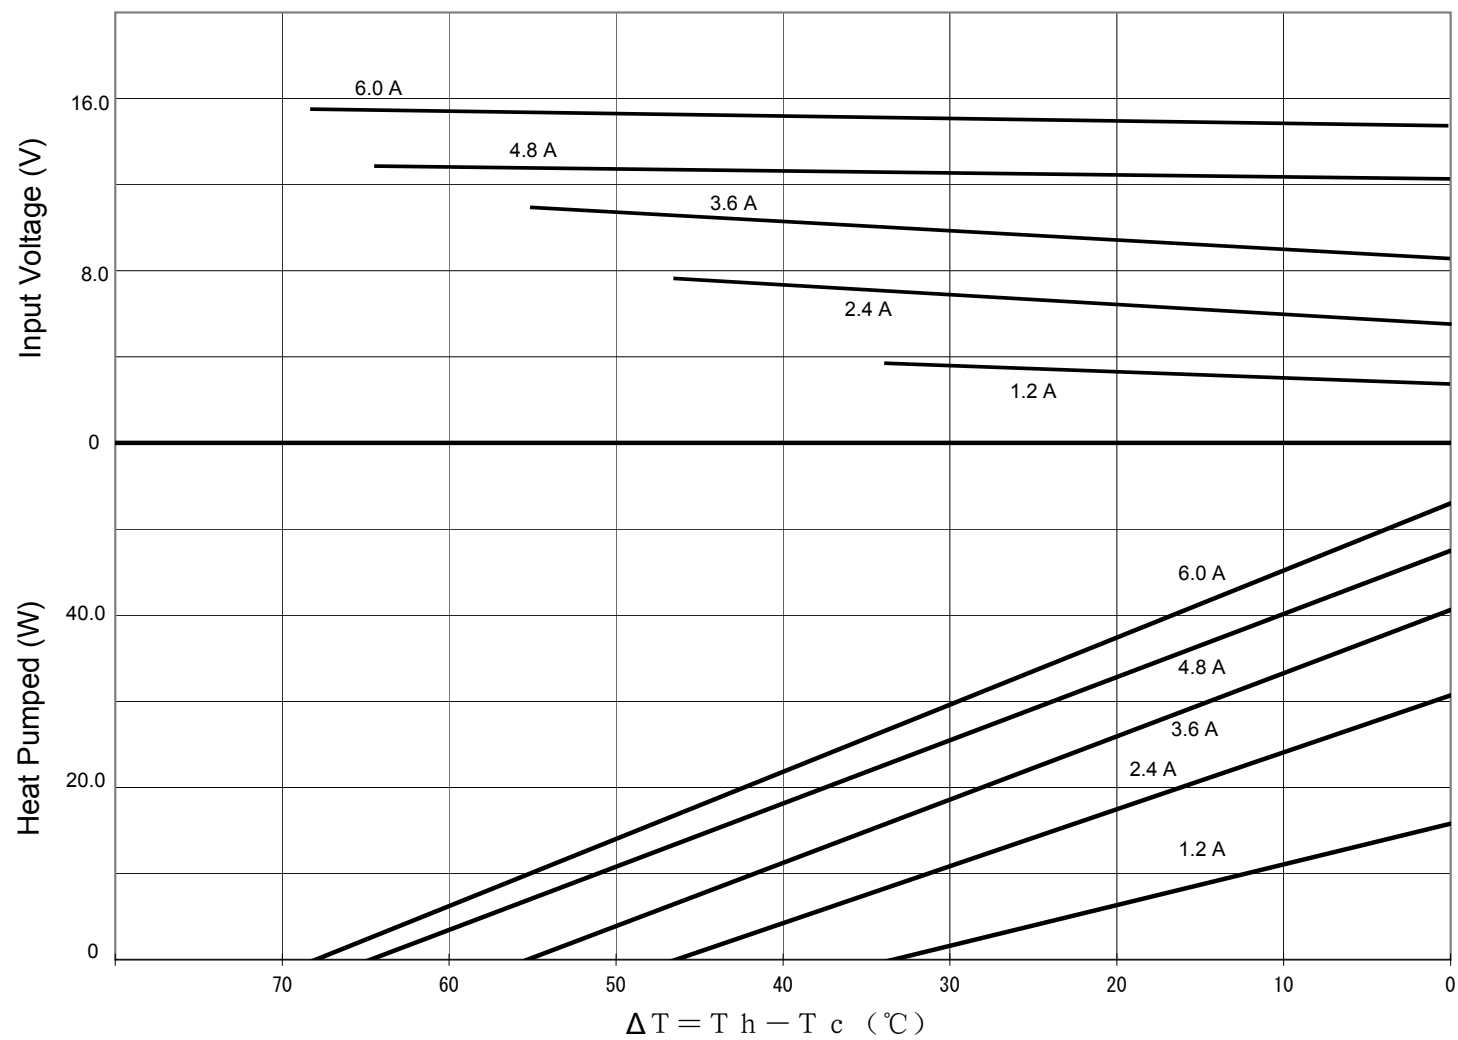

CP60440 ($T_h = 50^\circ\text{C}$)

