



Part Numbering Example: CPPE9 LZ A5 B6 100.0

CPPE9	L	Z	A5	B6	100.000
SERIES	VOLTAGE	ADDED FEATURES	OPERATING TEMP	STABILITY	FREQUENCY
Blank = 5 V L = 3.3 V	Blank = Bulk T = Tube Z = Tape/Reel	Blank = 0 – +70 °C A5 = -20 – +70 °C A7 = -40 – +85 °C	B6 = ±100 ppm BP = ±50 ppm	1.000 – 133.0 MHz	

Specifications:	Min	Typ	Max	Unit
Frequency Range:	1.0		133.0	MHz
Available Stability Options:	-100 -50		100 50	ppm ppm
Prog. Supply Voltage:	4.75 3.135	5.0 3.3	5.25 3.465	V V
Operating Temperature Range Options:	0 -20 -40		70 70 85	°C °C °C
Storage Temperature:	-55		125	°C
Aging (PPM/1st Year): Ta=25°C, Vdd=3.3V			±5	
Clock Rise Time @ 20/80 % PECL		0.6	1.5	ns
Clock Fall Time @ 80/20 % PECL		0.5	1.5	ns

Output Level: PECL


Notes: Recommended 0.01 µF bypass capacitor from Vdd to Gnd. Capacitor should be as close to oscillator as possible.

Cardinal Components, Inc., 155 Rt. 46 W, Wayne, NJ. 07470 TEL: (973)785-1333 FAX: (973)785-0053
<http://www.cardinalxtal.com> E-Mail: cardinal@cardinalxtal.com

Specifications subject to change without notice. Check website for latest updates



CPPE9

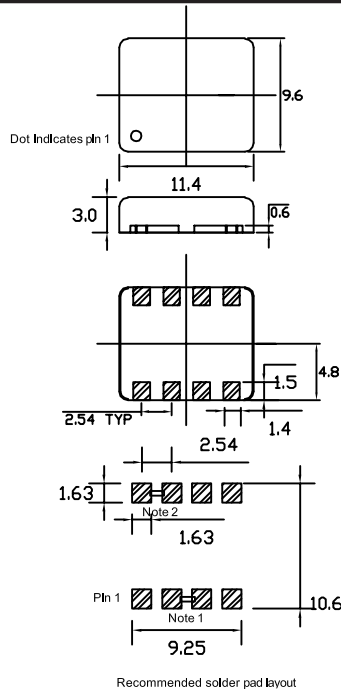


PIN FUNCTION

PIN 1 OE
 PIN 2 CONNECT TO PIN 3
 PIN 3 CONNECT TO PIN 2
 PIN 4 GND
 PIN 5 PECL-
 PIN 6 PECL+
 PIN 7 VDD
 PIN 8 VDD

Note 1: Connect pin 2 to pin 3
 Note 2: Connect pin 7 to pin 8

LEVELS TEST CIRCUIT

PECL Levels Test Circuit

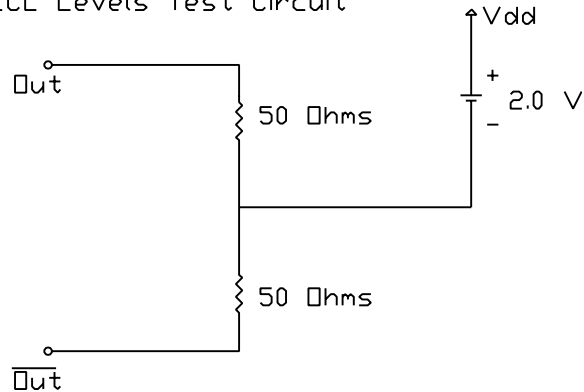

OUTPUT SKEW

PECL Output Skew

