
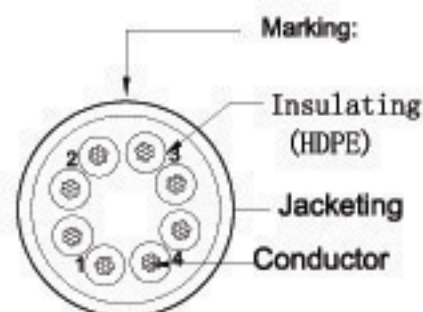


DATE	REV	DESCRIPTION	BY	CHKD

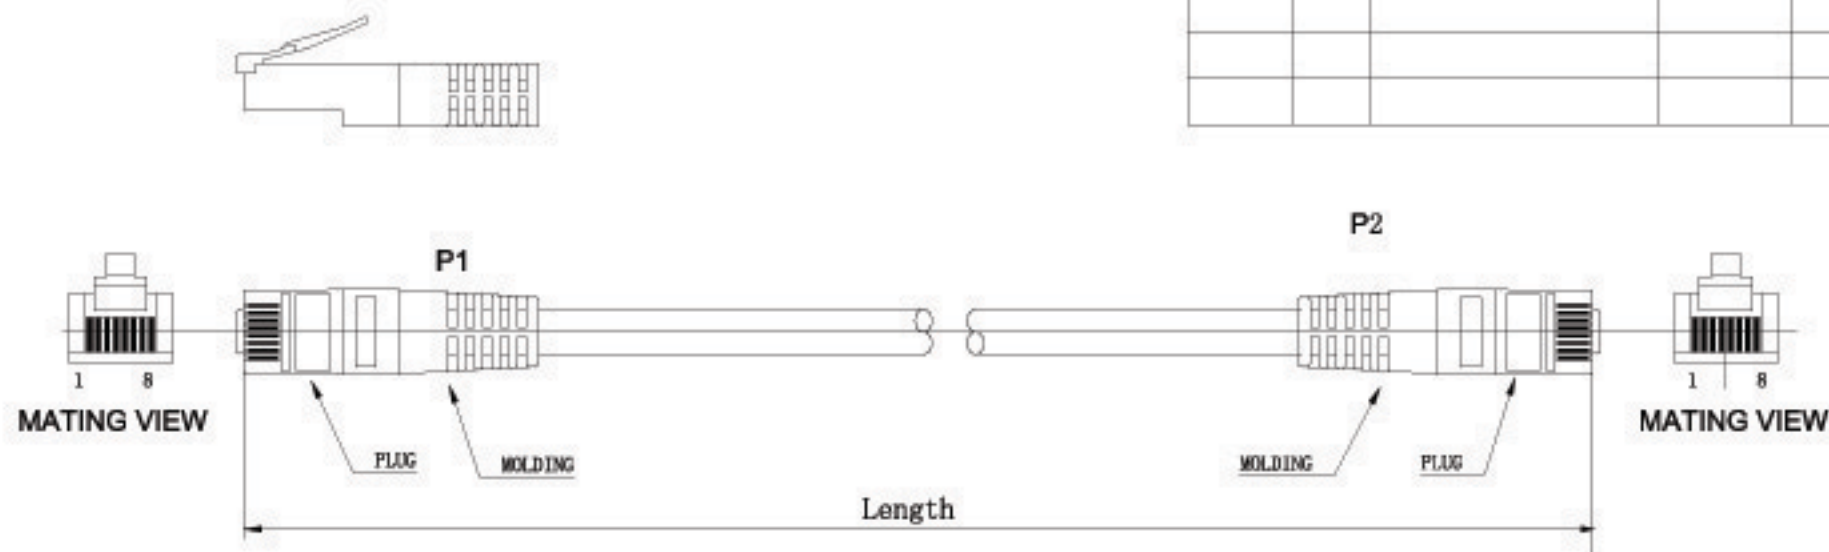

orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

A-MCU60xxx/x-R

LENGTH: 0.5m - 30.0m
 0.5m - 600005
 1.0m - 600010
 X
 X
 X
 30.0m - 60300


G-GREY
 R-RED
 G-GREEN
 Y-YELLOW
 B-BLUE

P/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Wire Copper 24AWG TO.196±0.015mm
Insulation	Thickness: MIN at any point: 0.15mm MAX AVG: 0.25mm Diameter: 1.94±0.05mm
Jacketing PVC	Thickness: MIN at any point: 0.40mm MAX AVG: 0.50mm Diameter: 5.9±0.10mm

WIRE	CAT.6 UTP STR 24AWG*4P
PLUG	8P8C SDI*
Color	grey, red, yellow, blue, green
Length	0.5M - 30.0M

RoHS Compliant

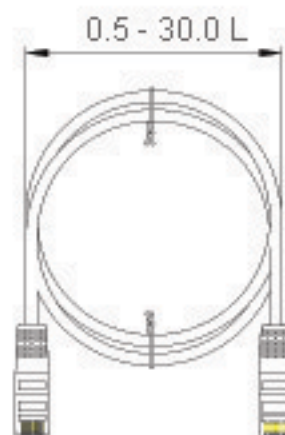

Unless specified on the drawing, tolerances are per the following:

.	± 1
.X	± 0.2
.XX	± 0.05

3RD



ASSMANN
Electronic Components

DRAW. NO		ITEM	A-MCU60xxx/x-R		
DEPARTMENT		DRAW	WZY	DATE	2007/04/04
SCALE		CHECKER	APPROVAL		
UNIT	MM	SHEET	1	OF	1