

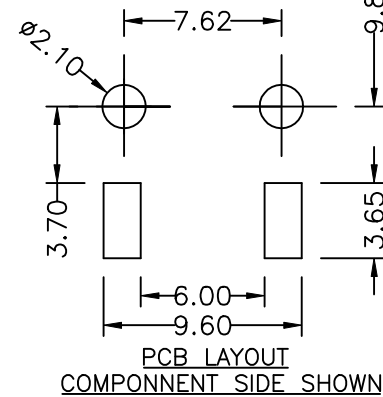
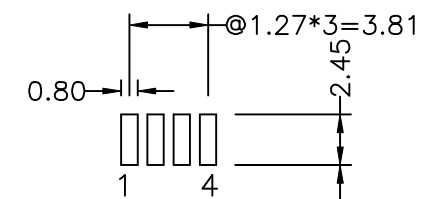

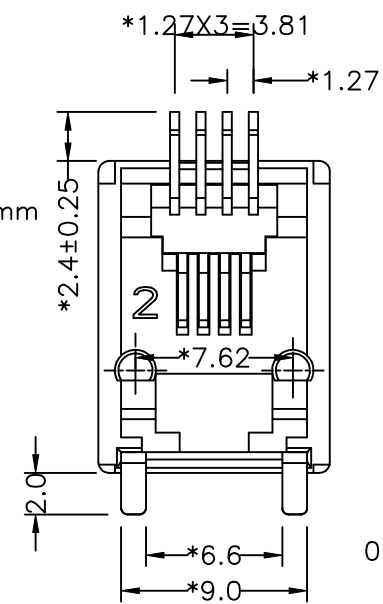
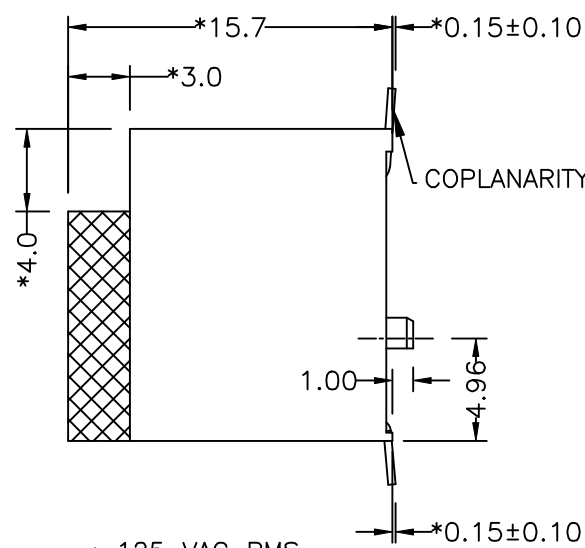


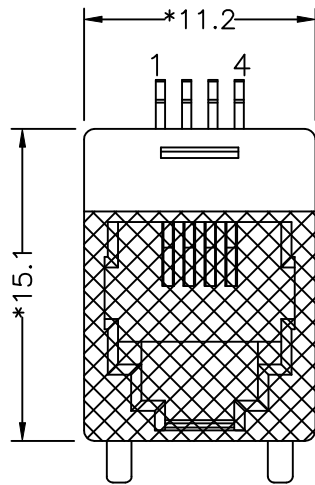

NOTES:
ELECTRICAL:
1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
MECHANICAL:
1. HOUSING MATERIAL : FR52.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST-SOLDER: 10 LBS MIN.
ENVIRONMENTAL:
1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. INFRARED SOLDER TEMPERATURE : 255°C TO 265°C 5-10SECOND.
MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO: E163191.
ROHS PART NUMBER:E5244-700BUX-L

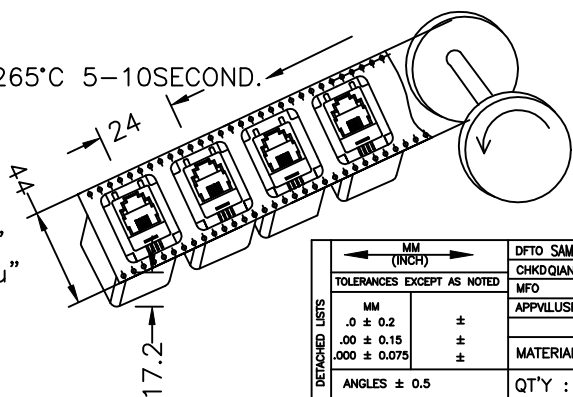

1-3u" 2-6u"
3-15u" 4-30u"
5-50u"

MM (INCH)		DFTO SAMMY DATE 03/31/05		FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD QIANPU DATE 2005/3/31		TITLE (W/O PANEL STOP)	
		MFO DATE		TOP ENTRY PCB JACK 4P	
		APPV LUSHENG DATE 2005/3/31		DRAWING NO. GE523107-LA	
				/PART NO. SEE NOTE	
				DO NOT SCALE DRAWING	
				SHEET OF	